A Lightweight External Memory Engine to Bridge the Capability Gap Between On-Device and Cloud Language Models

Ibrahim Sudheysi Ali

166344

ICS 4C

Supervisor Name

Tiberius Tabulu

An Informatics and Computer Science Project Submitted to the School of Computing and Engineering Sciences in Partial Fulfillment of the Requirements for the Award of a Degree in Bachelor of Science in Informatics and Computer Science

School of Computing and Engineering Sciences

Strathmore University

Nairobi, Kenya

November 2026

Declaration and Approval

I declare that this work has not been previously submitted and approved for the award of a degree by this or any other University. To the best of my knowledge and belief, the project report contains no material previously published or written by another person except where due reference is made in the report itself.

Student Name: Ibrahim Sudheysi Ali

Admission Number: 166344

Student Signature: _____ Date: _____

The project report of Ibrahim Sudheysi Ali has been reviewed and approved by Tiberius Tabulu, School of Computing and Engineering Sciences, Strathmore University.

Supervisor Signature: _____ Date: _____

Abstract

Small language models on a laptop keep data private, but they know far less than cloud models and forget whatever falls outside their context window. Retrieval-augmented generation (RAG) narrows this gap by pasting retrieved text into the prompt, which the model must re-read at every question.

This study designed, implemented and evaluated CAMR, a lightweight external memory engine for a frozen small model on a Mac. CAMR keeps the model's own keys and values for what it is told in rooms on the SSD and lays the one room a question needs in front of the model already read. It was delivered as a native Mac chat application and evaluated experimentally on the Long Haul, a scripted 2-to-4-million-token project history, against the same models without memory, RAG over the same memory, and Claude models reading their full window.

A 4-billion-parameter model with CAMR answered 29 of 73 questions at 2, 3 and 4 million tokens, against 32, 13 and 10 for Claude Sonnet alone and 11 for the model alone. Its first word came in 0.2 to 0.3 seconds, against 13 to 105 seconds for Sonnet and Opus, in 5 to 8 GB of RAM, and did not slow as memory grew. Against RAG, CAMR was as accurate, answered sooner and completed three times as many tool errands. Memory closed knowledge gaps, not reasoning gaps. A laptop model with a memory of its own notes can therefore rival cloud models on long personal histories.

Keywords: on-device language models; external memory; key–value cache; retrieval-augmented generation; Apple silicon; long context

Table of Contents

Chapter 1: Introduction 1
1.1 Background Information 1
1.2 Problem Statement 2
1.3 Objectives 2
1.3.1 General Objective 2
1.3.2 Specific Objectives 2
1.4 Research Questions 3
1.5 Justification 3
1.6 Scope 4
1.7 Limitations and Delimitations 4
Chapter 2: Literature Review 6
2.1 Introduction 6
2.2 The State of On-Device Language Models and External Memory 6
2.2.1 The Rise of On-Device Models 6
2.2.2 What the Capability Gap Is Made Of 6
2.2.3 Retrieval as a Substitute for Scale 6
2.2.4 Compressing What the Model Reads 7
2.2.5 Reusing the Model's Own Keys and Values 7
2.2.6 Evaluation and Risks of Persistent Memory 8
2.3 Related Works 9
2.3.1 MemGPT 9
2.3.2 Generative Agents 9
2.3.3 MemoryBank 10
2.3.4 HippoRAG 10
2.3.5 Mem0 11
2.4 Gaps in Related Works 12
2.5 Conceptual Framework 13
Chapter 3: Methodology 15
3.1 Introduction 15
3.2 Research Paradigm 15
3.2.1 Data Acquisition 15
3.2.2 Data Preparation 16
3.2.3 Experimental Conditions 16
3.2.4 Measurement and Validation 16
3.3 Development Approach 16
3.4 System Analysis 17

3.4.1 Functional Requirements 17
3.4.2 Non-Functional Requirements 17
3.5 System Design 18
3.5.1 Architectural Overview 18
3.5.2 Experimental Design 18
3.5.3 Datasets and Task Types 19
3.5.4 Evaluation Metrics 19
3.5.5 Comparison Procedure 20
3.5.6 Threats to Validity 20
3.6 Tools and Techniques 20
3.6.1 Python 20
3.6.2 MLX and Local Models 21
3.6.3 Hosted Inference APIs 21
3.6.4 Embedding Model 21
3.6.5 Storage on the Device 21
3.6.6 Application and Auxiliary Tools 21
3.7 Deliverables 21
3.7.1 The CAMR Memory Engine 21
3.7.2 The Evaluation Harness 21
3.7.3 Experimental Results 22
3.7.4 The Application and System Documentation 22
3.8 Ethical Considerations 22
Chapter 4: System Analysis and Design 23
4.1 Introduction 23
4.2 System Requirements 24
4.2.1 Functional Requirements 24
4.2.2 Non-Functional Requirements 27
4.2.3 Data Requirements 29
4.2.4 Interface and Integration Requirements 30
4.2.5 Requirements Traceability 30
4.3 System Analysis Diagrams 31
4.3.1 Context Diagram 31
4.3.2 Use Case Diagram 32
4.3.3 Use Case Descriptions 34
4.3.4 Activity Diagram: The Evaluation Pipeline 35
4.4 System Design Diagrams 36
4.4.1 Architecture of the Baseline, CAMR v1 36
4.4.2 Architecture of CAMR 36

4.4.3 Class Diagram of the Engine 39
4.4.4 The Assistant: Routing, Research, Files, Revision and Shelves 41
4.4.5 Sequence Diagram: One Question 42
4.4.6 State Machine Diagram of a Room and Its Moments 44
4.4.7 Logical Schema of the Baseline Store 46
4.4.8 File and Data Design of CAMR 47
4.4.9 Deployment Diagram 50
4.5 Design Changes Since the Proposal 52
4.6 Chapter Summary 53
Chapter 5: System Implementation, Testing and Evaluation 54
5.1 Introduction 54
5.2 Implementation Environment 55
5.2.1 Hardware and Deployment Environment 55
5.2.2 Software, Services and Configuration 56
5.2.3 Deployment and Reproducibility 57
5.3 Dataset Description 57
5.3.1 The Long Haul 57
5.3.2 Public Suites from the Hugging Face Hub 59
5.3.3 Data of the Earlier Stages 60
5.3.4 Data Preparation and Partitioning 60
5.4 System Implementation 60
5.4.1 The Engine's Modules 61
5.4.2 Write Path, Read Path and Tiers 62
5.4.3 Model Selection and Configuration 62
5.4.4 The Vault, the Core, Reach and the Switch 63
5.4.5 The Assistant: Routing, Research, Files and Revision 63
5.4.6 The Application: Modules, Integration and User Workflows 64
5.4.7 Memory for Other Runtimes: the Ollama Pairing 70
5.4.8 The Benchmark Harness and the Contenders 70
5.5 Testing 70
5.5.1 Test Strategy and Acceptance Criteria 71
5.5.2 Test Cases and Results 71
5.5.3 Defects Found and Retests 73
5.6 Version Control and Implementation Evidence 74
5.7 Author Oversight and Use of AI-Assisted Tools 75
5.8 Evaluation Results 75
5.8.1 The Long Haul: Right Answers as the History Grows 76
5.8.2 Past the Window: 3M and 4M 78

5.8.3 What Was Answered: Knowledge Against Reasoning 78
5.8.4 Larger Readers: 8B and 27B 80
5.8.5 The 1.7B: Its Wording, Not Its Memory 80
5.8.6 Notes Against Words: What the Tensors Buy 80
5.8.7 The Claude Yardstick: Time and Cost 81
5.8.8 Speed as Memory Grows 82
5.8.9 RAM: the Cap on the Buffer Cache 84
5.8.10 Storage at 8 and 4 Bits 85
5.8.11 Which Reach Works Best 85
5.8.12 Multimodal Memory 86
5.8.13 Code: Café Websites from Memory 89
5.8.14 The Assistant and the Shelves in the App 90
5.8.15 The Public Suites 91
5.8.16 The Ollama Pairing on the Suites 91
5.8.17 Development Evidence: the Rooms Build on Scripted Lives 92
5.8.18 The Baseline, CAMR v1, on Public Benchmarks 94
5.9 Discussion and Limitations 95
5.9.1 Results by Objective 95
5.9.2 Objective i: Memory Techniques and Their Limits on the Device 96
5.9.3 Objective ii: The Design of the Engine 97
5.9.4 Objective iii: The Engine on a Consumer Laptop 97
5.9.5 Objective iv: The Capability Gap by Task Type 98
5.9.6 Objective v: How Much to Read, and What Each Part Contributes 99
5.9.7 CAMR Against Conventional RAG and Long-Context Pipelines 99
5.9.8 What Failed, and Why 100
5.9.9 Limitations, Delimitations and Threats to Validity 101
Chapter 6: Conclusions, Recommendations and Future Works 103
6.1 Introduction 103
6.2 Conclusions 103
6.2.1 Objective i: Techniques and Their Limits on a Device 103
6.2.2 Objective ii: The Design 103
6.2.3 Objective iii: On the Device 103
6.2.4 Objective iv: Evaluation of the Gap 104
6.2.5 Objective v: How Much to Read, and What Each Part Contributes 104
6.2.6 Contribution 104
6.2.7 Conditions Within Which the Conclusions Hold 105
6.3 Recommendations 105
6.4 Future Works 106

References 108
Appendix A: Reproducing the Results 112
Appendix B: Decision Log Entries Cited 114

List of Figures

Figure 2.1: The MemGPT virtual context architecture, adapted from Packer et al. (2023) 9

Figure 2.2: The Smallville environment of Generative Agents (Source: Park et al., 2023, project repository) 10

Figure 2.3: The MemoryBank framework with memory updating and forgetting (Source: Zhong et al., 2024, project repository) 10

Figure 2.4: HippoRAG offline indexing and online retrieval (Source: Gutierrez et al., 2024, project repository) 11

Figure 2.5: The Mem0 memory layer within an agent stack (Source: Mem0 project documentation) 12

Figure 2.6: Conceptual framework of the study 13

Figure 4.1: Context diagram of CAMR 32

Figure 4.2: Use case diagram of CAMR 33

Figure 4.3: The evaluation pipeline of the Long Haul 36

Figure 4.4: Component diagram of CAMR, the final engine 38

Figure 4.5: Class diagram of the CAMR engine 40

Figure 4.6: Sequence diagram of one question answered in Chat 43

Figure 4.7: State machines of a moment, a room and a vault note's strength 45

Figure 4.8: Logical schema of the baseline's store 46

Figure 4.9: Files of a CAMR memory, its reaches and its records 48

Figure 4.10: Deployment diagram of CAMR on the Mac 51

Figure 5.1: Starting the app: the model's layers fill in the tensor panel as their weights arrive ("loading weights"), while Chat offers questions to start with 65

Figure 5.2: Chat with memory on (top) and off (bottom), each in a new conversation: with memory, a fact from the Long Haul is answered from note 609 on the Projects shelf, read from the SSD; with memory off, the model alone does not know it 65

Figure 5.3: Shelves on "Auto" (Qwen3 4B): a note about Python is filed on the Coding shelf by meaning, while a personal moment about Spanish lessons falls to Projects; the answer names the note and shelf it read 66

Figure 5.4: Compare on Qwen3 4B: CAMR and RAG both answer "Patrick Chacha"; CAMR's first word comes at 257 ms with 458 tokens read as text and 492 tokens already read as notes (room 454), RAG's at 304 ms with 749 tokens read as text, and with no memory the model does not know 66

Figure 5.5: Code in Chat: a Python function written by Qwen3 4B, shown as a formatted block with its language, 39 lines and a Copy button 67

Figure 5.6: A one-page café website requested in Chat, returned as an HTML file in a code block 67

Figure 5.7: A general question answered by the 4B from its own knowledge, with its working, labelled "from the model" and learned on the Research shelf 68

Figure 5.8: The 8B's reasoning, folded once the answer is written ("Thought for 10.9 seconds"); some of its LaTeX is shown as written rather than typeset 68

Figure 5.9: The tensors in CAMR mode: room 609 is read from the SSD and flows into the model's 36 layers; 461 tokens are already read as notes and 458 are read as text, and the first word comes 0.24 s later 69

Figure 5.10: The tensors in RAG mode on the same question: eight chunks from the shelves are pasted in as text, so 801 tokens must be read before the first word, which comes 0.35 s later 70

Figure 5.11: Share of questions answered right as the history grows. CAMR (cyan) holds its level past 1M tokens; the models alone (amber) and Claude alone (grey, dashed) fall once the history outgrows their windows 77

Figure 5.12: Right answers at 2M tokens by family: CAMR (cyan) against Claude alone (grey, hatched) 79

Figure 5.13: The wait for the first word as the history grows: CAMR's median (cyan) against the model alone (amber) and Claude's first token per request (grey, dashed); note the logarithmic scale 81

Figure 5.14: The wait, retrieval time, RAM and disk as the 1.7B's memory grows from 1,000 to 17,676 moments 83

Figure 5.15: Process footprint: the models alone (amber) against CAMR (cyan), before and after the cap 85

Figure 5.16: Right answers by reach 86

Figure 5.17: Multimodal memory: right answers of 37 on two draws of files, with CAMR (cyan), with the file in the prompt (grey) and alone (amber) 89

Figure 5.18: (Captured on 4 November, before the Code screen was folded into Chat.) A photographed receipt read into memory by Qwen3-VL-4B-Thinking, its total and an item answered later by the 8B from memory ("from memory · note 549 · read from the SSD") 91

List of Tables

Table 2.1: Comparison of representative memory systems for language models 12

Table 3.1: Experimental conditions 18

Table 3.2: Evaluation datasets and the task type each represents 19

Table 4.1: The three stages of CAMR 23

Table 4.2: Functional requirements catalogue 25

Table 4.3: Non-functional requirements catalogue 27

Table 4.4: Data requirements catalogue 29

Table 4.5: Interface and integration requirements catalogue 30

Table 4.6: Traceability matrix 31

Table 4.7: Use case descriptions 34

Table 4.8: Files of a CAMR memory 48

Table 4.9: What every answer records 49

Table 4.10: Changes from the proposed design 52

Table 5.1: Implementation environment and minimum requirements (from each record's environment field) 55

Table 5.2: Software and models (versions as tested) 56

Table 5.3: What the Long Haul plants and asks 58

Table 5.4: The cuts and their checkpoints 58

Table 5.5: The verdicts 59

Table 5.6: The public suites as run 59

Table 5.7: The engine's main modules (v2/camr_engine/) 61

Table 5.8: Contenders on the Long Haul 70

Table 5.9: Test cases and results 71

Table 5.10: Defects found and retests 73

Table 5.11: Right answers on the Long Haul (questions asked: 34, 40, 69 and 73; 3M and 4M ask the 2M questions) 76

Table 5.12: Where the 4B's room came from at each cut (summary.all.tiers and status in the records) 78

Table 5.13: Right answers at 2M by family (10 questions each; for "never said", declining is right)78

Table 5.14: Why the 1.7B missed facts at 2M (E-37) 80

Table 5.15: The Claude yardstick on the Long Haul (from the records) 81

Table 5.16: The wait as memory grows (engine:qwen3-1.7b; E-38) 82

Table 5.17: The 4B at 3M, before and after the 1 GB cap (E-41) 84

Table 5.18: Room storage at 16, 8 and 4 bits (engine:qwen3-1.7b, the first two cuts) 85

Table 5.19: Which reach works best (engine:qwen3-4b, 256K tokens, 40 questions; E-42)86

Table 5.20: Multimodal memory: right answers by kind of file (seed 1: 29 planted facts and 8 never-said questions; seed 2: the same counts) 87

Table 5.21: Code: café websites, average rules met per site (of 10) over five cafés (records 013817-code-cafe-code-qwen3-4b.json and 014735-code-cafe-code-qwen3-8b.json) 89

Table 5.22: Right answers on the public suites 91

Table 5.23: BABILong by story length (25 items each; qa1 to qa5) 92

Table 5.24: Desks compared on the development lives at day 83, MacBook Air (E-16) 92

Table 5.25: The proof lives at week 12, three lives added (E-20) 93

Table 5.26: Errands on the proof lives, last day, 1.7B reader (E-25) 93

Table 5.27: Time to the first word by memory on the desk, median of 5 (E-20) 94

Table 5.28: The baseline's main results on public benchmarks (CAMR v1) 94

Table 5.29: Scorecard: each claim, its evidence and whether it was met 95

Table 5.30: CAMR's memory against conventional pipelines, from the experiments of Section 5.899

Table 5.31: Weaknesses found 101

Table 6.1: Alignment from objectives to evidence and conclusions 104

Table 6.2: Recommendations 105

Table 6.3: Prioritised future works 106

Table A.1: The records behind Chapter 5 (v2/records/bench/2026-11-04/) 112

Table B.1: Decision log entries cited in this report 114

List of Equations

Equation 3.1: Fraction of the capability gap closed 18
Equation 4.1: Composite score of a note (baseline) 36
Equation 4.2: The gate (baseline) 36
Equation 4.3: Room placement of a new moment 37
Equation 4.4: Notes per token 37
Equation 4.5: Strength of a vault note 39
Equation 4.6: The disk budget rule 39
Equation 4.7: Share of the desk's attention drawn by a moment 44
Equation 5.1: Accuracy at a cut 59
Equation 5.2: Closeness of two moments, and the moment a question reads 62
Equation 5.3: Size of a room's notes 62
Equation 5.4: Time to the first word 83
Equation 5.5: Read bandwidth of a room fetched from the SSD 83

List of Abbreviations

AI - Artificial Intelligence

API - Application Programming Interface

CAMR - Capability-Adaptive Memory Retrieval, the memory engine of this study

CPU - Central Processing Unit

DSR - Design Science Research

GB - Gigabyte (10^9 bytes); GiB - Gibibyte (2^30 bytes)

GPU - Graphics Processing Unit

HTTP - Hypertext Transfer Protocol

JSON - JavaScript Object Notation

KV - Key–Value (the keys and values a transformer layer keeps for each token it has read)

LLM - Large Language Model

LRU - Least Recently Used

MCP - Model Context Protocol

MLX - Apple's array framework for machine learning on Apple silicon

QA - Question Answering

RAG - Retrieval-Augmented Generation

RAM - Random Access Memory

RoPE - Rotary Position Embedding

SLM - Small Language Model

SSD - Solid-State Drive

TTFT - Time to First Token (the wait for the first word)

UML - Unified Modeling Language

Chapter 1: **Introduction**

1.1 **Background Information**

Language models have become the foundation of modern conversational software, powering assistants that answer questions, summarise documents and help with everyday tasks. The most capable of these models contain tens or hundreds of billions of parameters and run as cloud services on specialised hardware. Their capability comes at a cost: every query travels over a network, personal data leaves the user's device, the service fails without connectivity, and each request carries a price. Empirical work on scaling has shown that capability grows predictably with model size and training data (Kaplan et al., 2020), which is precisely why the strongest models are also the largest and the least practical to run locally.

A parallel movement has formed around small language models, typically between one and eight billion parameters, that run directly on consumer hardware such as laptops and phones. Recent small models such as Qwen2.5 (A. Yang et al., 2024), Qwen3 (A. Yang et al., 2025), Llama 3.2 (Grattafiori et al., 2024), Phi-3 (Abdin et al., 2024), and the on-device foundation models that Apple ships on its consumer chips (Gunter et al., 2024) show that useful language ability fits in the memory of an ordinary computer. On-device deployment offers real advantages: answers are generated locally with low latency, private data never leaves the machine, the assistant keeps working offline, and the marginal cost of a query is zero. A recent survey confirms both the rapid progress of small models and their persistent weaknesses relative to their larger counterparts (Lu et al., 2024).

The most consistent of those weaknesses is knowledge. A small model has not memorised as many facts as a large one. Mallen et al. (2023) showed this directly: language models struggle with less popular, long-tail facts, retrieval of external text helps significantly in exactly those cases, and making models bigger mainly improves recall of popular facts while barely improving the long tail. If much of the gap between small and large models is missing knowledge rather than missing reasoning, then supplying the right knowledge at the right time, from outside the model, can recover a meaningful share of the gap without touching the model at all.

A second weakness matters as soon as an assistant is used for long work. A model only sees what is in its context window, and on a laptop the window is limited by memory: the keys and values a transformer keeps for every token it has read grow with the history. Cloud models now read up to a million tokens at once, while a small local model with a 64,000-token window already needed 15.2 GB of RAM in this study (Section 5.8.1). A project that runs for months produces far more than either window holds, so both kinds of model forget its beginning.

This study designed, built and evaluated CAMR (Capability-Adaptive Memory Retrieval), a lightweight external memory engine that sits beside a frozen language model on a consumer laptop. CAMR was built in two versions. The first, kept in this report as the baseline (CAMR v1), stored short text notes in an embedded database and gave the model the few that matched each question; it was

evaluated on public question-answering benchmarks. The engine reported here keeps the model's own working state instead: while the model reads a moment, it writes its keys and values at every layer, and CAMR saves them to the SSD in rooms of related moments. A question opens one room, reads it in one burst and lays it in front of the model already read, so the model continues as if it had just read those moments. The model's weights are never changed. The study then measured, separately for different kinds of question, how much of the gap between a small on-device model and a large cloud model this memory closes, and at what cost in time, RAM and disk.

1.2 **Problem Statement**

Users who want a private, offline, low-cost assistant must accept a small on-device model, and with it a marked drop in capability, most visibly on questions that require knowledge the small model has not memorised and on long work whose history no longer fits in its context window. The two standard remedies do not fit the on-device setting. Replacing the small model with a larger one defeats the purpose, because the larger model no longer fits on the device. Fine-tuning the small model on new knowledge requires compute that ordinary users do not have, must be repeated whenever knowledge changes, and risks degrading the model's existing abilities.

Retrieval-augmented approaches offer a third path: leave the model frozen and supply relevant text at question time. The research literature has established the ingredients separately. Retrieval can substitute for model scale on knowledge-heavy tasks (Lewis et al., 2020; Borgeaud et al., 2022; Izacard et al., 2023). Memory systems can accumulate and organise information across long interactions (Packer et al., 2023; Zhong et al., 2024; Gutierrez et al., 2024). Prompts can be compressed so that less text carries the same meaning (Jiang et al., 2023), and a model's keys and values can be reused instead of recomputed (Gim et al., 2024). What no existing work provides is a measured answer to the question that matters for on-device deployment: when these ingredients are combined into a memory engine beside a frozen small model on a real consumer device, what fraction of the small-versus-large capability gap is actually recovered, on which kinds of tasks, and at what cost in time, RAM and storage as the memory grows? Without that answer, designers of on-device assistants cannot know whether memory engineering is a worthwhile substitute for model scale, or where its limits lie.

1.3 **Objectives**

This section states the general objective of the study and breaks it down into the specific objectives that guided the work.

1.3.1 **General Objective**

The general objective of this study was to design, implement and experimentally evaluate a lightweight external memory engine for a frozen small language model on a consumer laptop, in order to measure how much of the capability gap between on-device and cloud language models such an engine bridges, by task type, with the time and memory cost of every answer.

1.3.2 **Specific Objectives**

i. To investigate existing memory, retrieval and compression techniques for language models and establish their applicability and limitations in the on-device setting.

ii. To design a lightweight memory engine for a frozen small language model, comprising a write path that turns what the user tells it into stored memory, a read path that finds the memory a question needs, and a budget that controls how much memory the model reads.

iii. To implement the designed engine on a consumer laptop with no dedicated graphics card, so that the model and its memory run entirely on the device and the memory can grow on local storage.

iv. To evaluate the implemented engine experimentally against the same model without memory and against a large cloud model, separately for knowledge-bound and reasoning-bound tasks, together with the time to the first word, the RAM and the storage of every answer.

v. To determine how much memory the model should read, and what each component of the engine contributes, through controlled comparisons in which one choice is varied at a time.

1.4 **Research Questions**

The study sought to answer the following research questions, one for each specific objective:

i. What memory, retrieval and compression techniques exist for language models, and what are their limitations in the on-device setting?

ii. How should a lightweight engine keep and find memory for a frozen small model so that the model can use it?

iii. Can such an engine run on a consumer laptop with a memory that grows without making the model slower or heavier?

iv. How much of the capability gap between a small on-device model and a large cloud model does the engine bridge, does it help more on knowledge-bound than on reasoning-bound tasks, and at what cost?

v. How much memory should the model read, and what does each component of the engine contribute?

1.5 **Justification**

The study matters for three audiences. For users, especially in settings where connectivity is unreliable or data privacy is a serious concern, a more capable on-device assistant means useful AI that works offline, keeps personal data local and costs nothing per query. For developers of on-device assistants, the study provides what the literature lacked: a measured, component-by-component

account of how far memory engineering can substitute for model scale and for a long context window, allowing informed decisions about where to invest effort. For the research community, the study contributes an evaluation method, a scripted long project graded by rule in which every answer records what it cost, against which future memory systems can be compared.

The study was also deliberately scoped to be feasible as a final-year undergraduate project. The language models themselves were reused, not trained, so the original work lies in the design of the engine and the design of the measurement, both of which were achievable on a single consumer laptop with modest API credits for the large reference models.

1.6 **Scope**

The deployment target was a consumer laptop with no dedicated graphics card. Development began on a MacBook Air M4 with 16 GB of unified memory, and every reported measurement of the engine was made on a MacBook Pro M5 Pro with 24 GB. Both use Apple silicon, whose integrated graphics processor runs the models through Apple's MLX framework (Hannun et al., 2023); the baseline ran on CPU-only machines with 16 GB. The small models studied were open-weight Qwen3 models of 1.7, 4 and 8 billion parameters, run locally and frozen; a 27-billion-parameter model was run on the same Mac as a larger local comparison, and the Ollama runtime was paired with the engine to test memory supplied as words. The large reference models were Claude Haiku 5.5, Sonnet 5.5 and Opus 5.5, reached through a cloud API and never run locally; they answered the same questions alone and served only as the yardstick. The baseline's reference was Kimi K3.

Evaluation used English material of three kinds: a scripted project history of 2 to 4 million tokens with questions graded by rule (the Long Haul), public benchmarks from the Hugging Face Hub (MATH-500, AIME, HARP and BABILong), and, for the baseline, the public question-answering benchmarks PopQA, HotpotQA, 2WikiMultiHopQA and GSM8K. Together they separate knowledge-bound from reasoning-bound performance. The system delivered is the memory engine, its benchmarks and their records, and a native Mac application with two parts, Chat and Code, that shows the engine at work. It is a research prototype, not a commercial product.

1.7 **Limitations and Delimitations**

The limitations of the study are the constraints it operated under. Timings and memory figures were measured on one Mac and may differ on other hardware, so device results are indicative rather than universal. The cloud reference models are commercial services whose behaviour can change between versions; the study pinned the model identifiers, recorded them in every record and logged every call. The main test is a scripted project, built to be hard in known ways; it is an approximation of real work, and its findings generalise to live use only to the degree that the script represents it.

The delimitations are boundaries the study deliberately drew. No language model was trained or fine-tuned in the engine; all weights remained frozen, since the research question is precisely what memory achieves without touching the model (the baseline trained two adapters only as a

comparison). The engine was not ported to mobile phones or to computers other than Apple-silicon Macs; the laptop target preserves the on-device claim while avoiding toolchain work that adds engineering effort without research value. A graph-based associative layer in the style of Gutierrez et al. (2024) was treated as optional; the baseline implemented a light form of it as entity bridging. No study with real users was carried out. Finally, the study is limited to English text; a first test of memory for documents, images and video is reported, but multilingual memory is left to future work.

Chapter 2: **Literature Review**

2.1 **Introduction**

This chapter reviews the research that the study builds on. It first surveys the current state of the field: the divide between small and large language models, the evidence on what the capability gap consists of, retrieval as a substitute for scale, the compression of what a model reads, the reuse of a model's own keys and values, the benchmarks that evaluate memory in long interaction, and the security risks of persistent memory. It then examines specific related systems that implement memory for language models, identifies the gaps those systems leave, and closes with the conceptual framework that guided the study.

2.2 **The State of On-Device Language Models and External Memory**

This section reviews the current state of the field: the rise of small on-device models, the composition of the capability gap, retrieval as a substitute for model scale, the compression and reuse of model inputs, and the evaluation and security of persistent memory.

2.2.1 **The Rise of On-Device Models**

Scaling studies established that language model capability grows smoothly with parameter count and training data (Kaplan et al., 2020), which drove the field toward ever larger models served from the cloud. A counter-movement followed. Model families such as Qwen2.5 (A. Yang et al., 2024), Qwen3 (A. Yang et al., 2025), Llama 3.2 (Grattafiori et al., 2024), Phi-3 (Abdin et al., 2024) and Gemma 2 (Gemma Team, 2024) publish strong open-weight models at one to eight billion parameters, small enough to run in a few gigabytes of memory on an ordinary laptop. Apple has gone further and ships a roughly three-billion-parameter foundation model directly on its consumer devices, with a larger server model handling requests that exceed the on-device model's ability (Gunter et al., 2024). Apple's MLX framework runs such models on the integrated graphics processor of Apple silicon, in memory shared with the CPU (Hannun et al., 2023). A survey by Lu et al. (2024) documents both the speed of this progress and the consistent finding that small models remain clearly weaker than large ones, particularly on knowledge-intensive tasks.

2.2.2 **What the Capability Gap Is Made Of**

The most important evidence for this study concerns the composition of the gap. Mallen et al. (2023) probed language models of many sizes on factual questions whose subjects ranged from very popular to very obscure, using a dataset they constructed for the purpose, PopQA. Three findings stand out. First, models of every size struggle on long-tail facts, and small models fail on them severely. Second, supplying retrieved text helps substantially on exactly those questions. Third, scaling the model up mainly improves recall of popular facts and barely improves the long tail at all. In other words, a large part of what users buy with model scale is memorised knowledge, and memorised knowledge is the one ingredient that can also be supplied from outside the model. Reasoning ability, by contrast,

appears to be more deeply tied to scale, which is why this study treated knowledge-bound and reasoning-bound tasks separately and predicted different outcomes for each.

A long context window does not remove the need for memory. Liu et al. (2024) showed that models use information at the start and end of a long context far better than information in its middle, so text that is present is not necessarily used. Kuratov et al. (2024) built BABILong, which hides simple facts in book-length text, and found that models use only a fraction of their nominal window well. Both results suggest that what a model is given to read should be small and relevant, not merely long.

2.2.3 **Retrieval as a Substitute for Scale**

A line of research spanning several years has demonstrated that letting a model read relevant external text at answer time can substitute for parameters. Retrieval-augmented generation showed that a model paired with a dense retriever over a document store outperforms much larger purely parametric models on knowledge-intensive tasks (Lewis et al., 2020), building on dense passage retrieval, which finds relevant text by comparing embedding vectors rather than keywords (Karpukhin et al., 2020). Borgeaud et al. (2022) made the substitution explicit: their RETRO model, augmented with retrieval from a trillion-token database, matched the performance of models with twenty-five times more parameters on language modelling benchmarks. Izacard et al. (2023) showed with Atlas that a retrieval-augmented model of eleven billion parameters could outperform a model fifty times its size on knowledge tasks. Together these results establish the premise this study depends on: parameters spent on memorising facts can, to a substantial degree, be replaced by retrieval, and the saving is largest precisely where small models are weakest. What these systems do not address is the on-device setting, where the retrieval corpus, the index and the model must all fit on a consumer machine and every token read costs measurable time.

2.2.4 **Compressing What the Model Reads**

Every token a model reads costs time on a device, so the density of stored memory matters as much as its relevance. Research on prompt compression has shown that the text supplied to a model carries substantial redundancy. Jiang et al. (2023) demonstrated with LLMLingua that prompts can be compressed many times over, by removing low-information tokens, with little loss in the quality of the model's output. A complementary line compresses context into learned representations: Chevalier et al. (2023) taught models to summarise long contexts into compact vectors that stand in for the original text, and Ge et al. (2024) trained an in-context autoencoder that condenses a context window into a short sequence of memory slots. The lesson the baseline took was that memory should be stored densely, as short notes rather than verbatim transcripts, so that a fixed token budget carries the most useful information. Compression had so far been applied to prompts and contexts at inference time, not to the design of a persistent memory store, and never with the question of how it interacts with closing the capability gap on a device.

2.2.5 **Reusing the Model's Own Keys and Values**

A transformer layer keeps, for every token it has read, a key and a value for each attention head; later tokens attend to them (Vaswani et al., 2017). This key–value cache is normally thrown away when a request ends, and building it is most of the cost of reading a long prompt. Several lines of work keep it instead. Transformer-XL carried the previous segment's hidden states into the next so that a model could attend beyond its segment (Dai et al., 2019). Memorizing Transformers stored past keys and values in an external memory and let one layer attend to the nearest of them, improving language modelling over long documents (Y. Wu et al., 2022). Serving systems page the cache in blocks so that many requests share memory efficiently (Kwon et al., 2023). Prompt Cache reuses the attention states of prompt modules that recur across requests (Gim et al., 2024), and CacheBlend combines the caches of separately processed retrieved passages, recomputing a small share of tokens so that the passages can attend to each other (Yao et al., 2025).

Two facts from this work shaped the engine. First, a saved cache is exact: laid back in front of the model, it gives the same result as reading the text again, at a fraction of the time. Second, caches made separately do not combine for free, because passages written apart never attended to each other; this is the problem CacheBlend works around. Keys also record each token's position as a rotation (Su et al., 2024), so a cache moved to a new position must be turned. None of these systems uses a saved cache as a persistent personal memory on a laptop, and none measures what such a memory costs in storage as it grows.

2.2.6 **Evaluation and Risks of Persistent Memory**

Benchmarks for conversational memory have matured recently and informed this study's evaluation design. Maharana et al. (2024) introduced LoCoMo, a benchmark of very long multi-session conversations, and found that models, even with long context windows or retrieval, lag far behind human recall of conversation history. D. Wu et al. (2024) introduced LongMemEval, five hundred questions embedded in long user–assistant histories testing information extraction, multi-session reasoning, temporal reasoning, knowledge updates and abstention, and found that commercial assistants suffer accuracy drops of around thirty percent when information must be remembered across sustained interaction. They also decompose memory design into indexing, retrieval and reading stages, a decomposition the engine mirrors in its write path, read path and budget. These benchmarks establish that memory in long interaction is an unsolved problem even for large cloud systems; neither, however, measures memory as an instrument for closing the small-versus-large capability gap, which is this study's concern.

A memory store that accepts writes from interaction is also an attack surface, and recent security research documents the risk concretely. Chen et al. (2024) showed with AgentPoison that an agent's long-term memory or retrieval store can be poisoned with a small number of crafted records, so that queries containing an optimised trigger retrieve the malicious records and steer the agent's behaviour while benign queries are left untouched. Dong et al. (2025) went further with MINJA, demonstrating that an attacker with ordinary query access, and no privileged write access at all, can inject malicious

records into an agent's memory purely through crafted interactions. These findings motivated two design choices: every stored memory carries its source and date, and the baseline screened each note before storing it. A full security evaluation was beyond the study's scope.

2.3 **Related Works**

This section examines specific systems that implement memory for language models, from operating-system-inspired context management to brain-inspired associative retrieval and production memory layers. Table 2.1 summarises the comparison.

2.3.1 **MemGPT**

Packer et al. (2023) framed the memory problem in operating-system terms. The model's limited context window is treated as fast main memory, an external store as disk, and the system pages information in and out as the conversation demands, allowing a fixed-context model to sustain interactions far longer than its window. The framing is influential because it makes explicit that what the model reads at each step is a policy decision, not a given, which is exactly the decision this study's budget controls; the engine's movement of rooms between RAM and the SSD follows the same idea at the level of saved tensors. MemGPT manages context length, however; it does not target capability gain, and it does not account for token cost or device latency. Figure 2.1 illustrates the two-tier architecture.

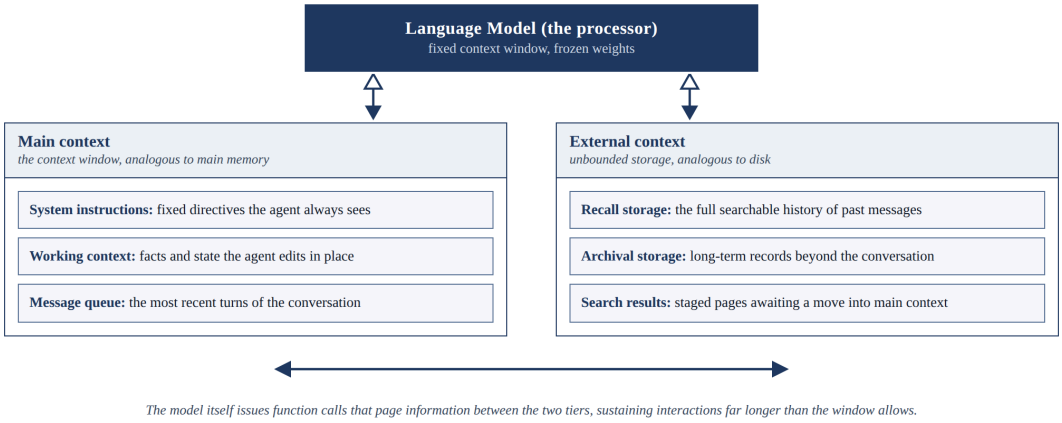


Figure 2.1: The MemGPT virtual context architecture, adapted from Packer et al. (2023)

2.3.2 **Generative Agents**

Park et al. (2023) gave simulated agents a memory stream of timestamped observations and retrieved from it by combining three scores: relevance to the current situation, recency and importance. Their generative agents produced believable long-running behaviour in a simulated town, and their three-part retrieval score was adopted by the baseline's retrieval policy. The system was designed for simulation rather than question answering, and its memory records are verbose natural-language entries, which makes it an instructive design source but not an answer to the efficiency questions a device imposes. Figure 2.2 shows the simulated town in which the agents live, work and remember.



Figure 2.2: The Smallville environment of Generative Agents (Source: Park et al., 2023, project repository)

2.3.3 **MemoryBank**

Zhong et al. (2024) added a model of forgetting. MemoryBank strengthens or decays stored memories over time in the spirit of the Ebbinghaus forgetting curve, so that what the system retains reflects both how often a memory is used and how old it is. The contribution is a principled answer to what should be kept, complementing the question of what should be retrieved; the engine's vault applies the same idea, letting a note's strength fade each day it is unused. Like the systems above, MemoryBank is evaluated on the quality of long-term companionship behaviour rather than on capability gain, token cost or latency. Figure 2.3 reproduces the framework figure from the project's repository.

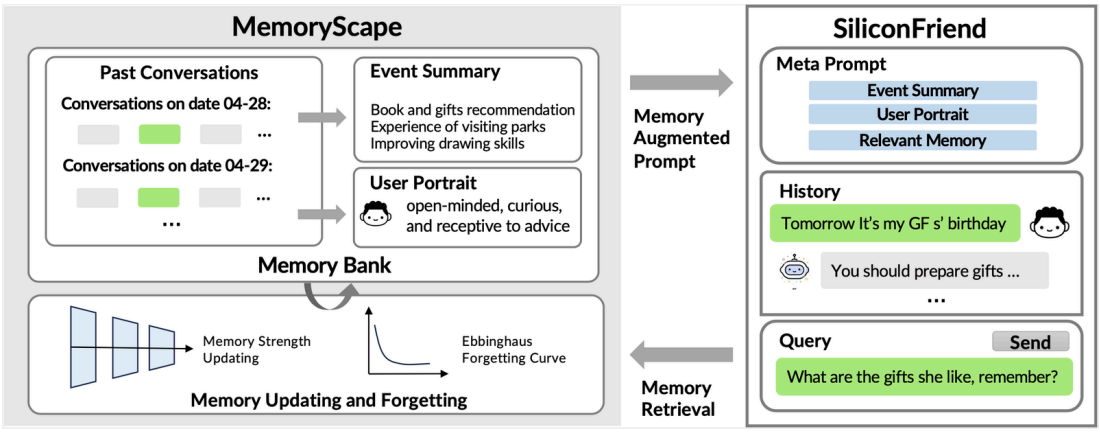


Figure 2.3: The MemoryBank framework with memory updating and forgetting (Source: Zhong et al., 2024, project repository)

2.3.4 **HippoRAG**

Plain similarity search retrieves passages that resemble the question, but some questions require connecting facts that do not resemble the question at all. Cognitive science offers a model for this in

spreading activation, where recalling one concept activates linked concepts (Collins & Loftus, 1975), and in the hippocampal indexing theory, where a compact index links the distributed traces of an experience so that touching one part can reactivate the whole (Teyler & DiScenna, 1986). Gutierrez et al. (2024) operationalised these ideas in HippoRAG: a language model extracts entities from stored passages into a knowledge graph that acts as the index, and at question time the entities in the query seed a Personalized PageRank walk over the graph, spreading relevance to connected passages, including multi-hop neighbours that similarity search misses. Figure 2.4 illustrates the pipeline. HippoRAG outperformed strong retrieval baselines on multi-hop question answering by up to twenty percent while being many times cheaper and faster than iterative retrieval methods. Its relevance to this study is twofold: it demonstrates the value of associative structure in memory, and its computational profile, graph construction by a language model and a graph walk per query, illustrates the kind of cost that must be justified against a device budget. The engine's rooms are a lighter version of the same index: a compact grouping of related moments that one question reactivates together.

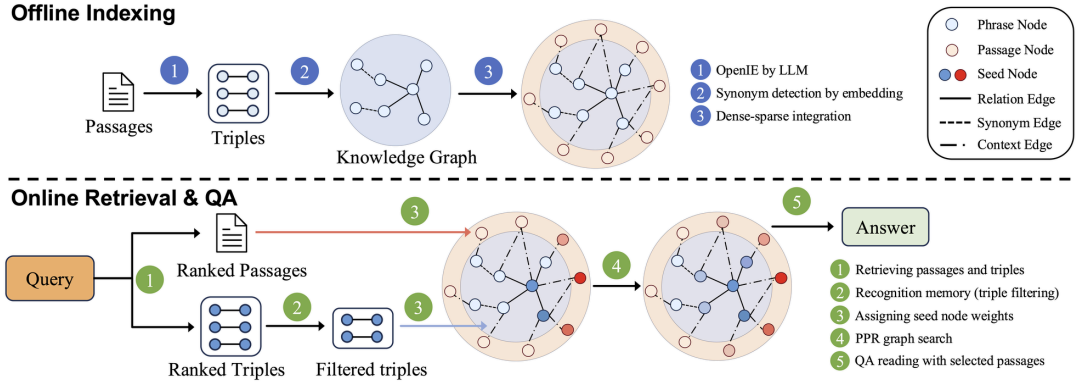


Figure 2.4: HippoRAG offline indexing and online retrieval (Source: Gutierrez et al., 2024, project repository)

2.3.5 **Mem0**

Production systems have begun packaging these ideas. Mem0 extracts and consolidates salient facts from conversations into a managed store and reports large token savings relative to feeding a model its full history (Chhikara et al., 2025). Its existence is evidence that the engineering direction is commercially credible. As a cloud service, however, it does not answer the on-device question, and like the research systems it does not measure gap closing per task type. Figure 2.5, drawn from the project's documentation, shows where the memory layer sits in an agent stack, reading at question time and writing after each response.

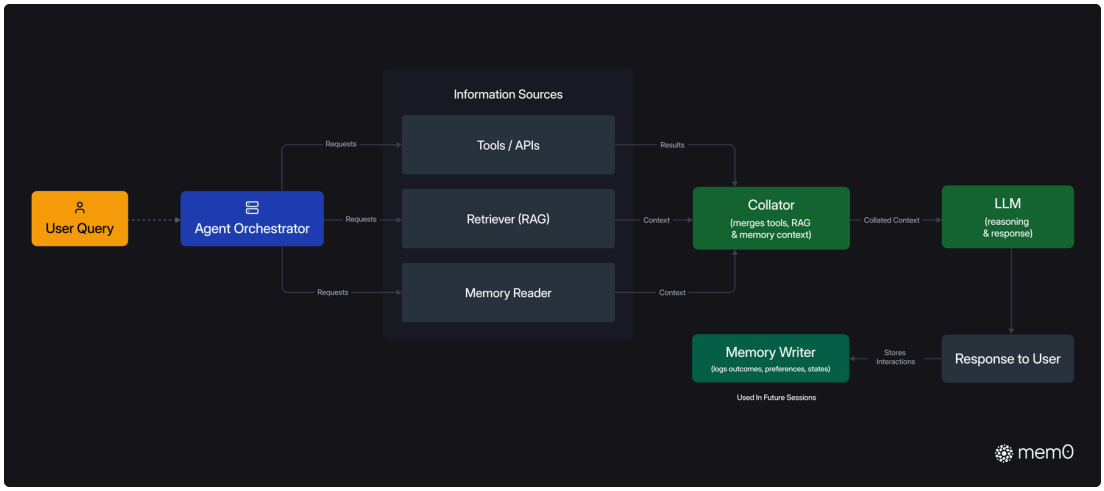


Figure 2.5: The Mem0 memory layer within an agent stack (Source: Mem0 project documentation)

Table 2.1: Comparison of representative memory systems for language models

System	**Core idea**	**Strength**	**Limitation for the on-device setting**
MemGPT (Packer et al., 2023)	Pages context in and out of the window like an operating system	Sustains very long interactions on a fixed window	Manages context length; does not target capability gain or token cost
Generative Agents (Park et al., 2023)	Memory stream scored by relevance, recency and importance	Simple, effective retrieval scoring	Designed for simulation; verbose natural-language records
MemoryBank (Zhong et al., 2024)	Memory strengthening and decay over time	Principled forgetting	No accounting of token cost or device latency
HippoRAG (Gutierrez et al., 2024)	Knowledge-graph index with Personalized PageRank retrieval	Strong multi-hop recall in a single retrieval step	Graph construction and walk are heavy for a device budget
Mem0 (Chhikara et al., 2025)	Extraction and consolidation of salient facts into a managed store	Production-ready; large token savings reported	Cloud service; gap closing per task type not measured
Memorizing Transformers (Y. Wu et al., 2022)	Past keys and values in an external memory, read by k-nearest-neighbour attention	Exact reuse of the model's own state over long documents	Needs a trained model; memory held in accelerator memory, not on a laptop's SSD

2.4 **Gaps in Related Works**

The reviewed literature establishes each ingredient separately. Retrieval can substitute for model scale on knowledge-heavy tasks (Lewis et al., 2020; Borgeaud et al., 2022; Izacard et al., 2023), and it helps most on exactly the long-tail knowledge where small models fail (Mallen et al., 2023). Memory systems can accumulate, organise, score and forget information across long interactions (Packer et al., 2023; Park et al., 2023; Zhong et al., 2024; Gutierrez et al., 2024; Chhikara et al., 2025). Text supplied to a model can be heavily compressed with little loss (Jiang et al., 2023; Chevalier et al., 2023; Ge et al., 2024), and a model's own keys and values can be saved and reused (Y. Wu et al., 2022; Gim et al.,

2024; Yao et al., 2025). Benchmarks exist that expose how poorly current systems remember long interactions (Maharana et al., 2024; D. Wu et al., 2024; Kuratov et al., 2024).

What was missing is the combination and the measurement. No existing work assembles these ingredients into a memory engine beside a frozen small model on a consumer device and then answers the deployment question directly: what fraction of the small-versus-large capability gap does the engine close, separately for knowledge-bound and reasoning-bound tasks, and at what cost in time, RAM and storage on the device as the memory grows past any context window? Existing memory systems are evaluated on recall or task success, not on gap closing; key–value reuse is evaluated as a serving optimisation, not as a persistent memory; and no study reports honest per-answer cost accounting on consumer hardware. This intersection defines the gap this study addressed.

2.5 **Conceptual Framework**

Figure 2.6 presents the conceptual framework that structured the study, as it was set out at the proposal stage. The independent variable is the configuration of the memory engine: how what the user tells it is kept (the write policy), how a question finds what it needs (the retrieval policy), and how much memory the model reads (the budget). The process is question answering on the device: the engine recalls relevant memory, assembles it within the budget, and the frozen model generates an answer from the question and the assembled memory. The dependent variables are the share of the capability gap closed, the accuracy gained per token of memory supplied, and the end-to-end latency on the device. Task type, knowledge-bound against reasoning-bound, moderates the relationship: substantial gap closing was predicted on knowledge-bound questions and little on reasoning-bound ones. The language model itself is held constant throughout, weights frozen, so that every measured gain is attributable to the memory engine alone.

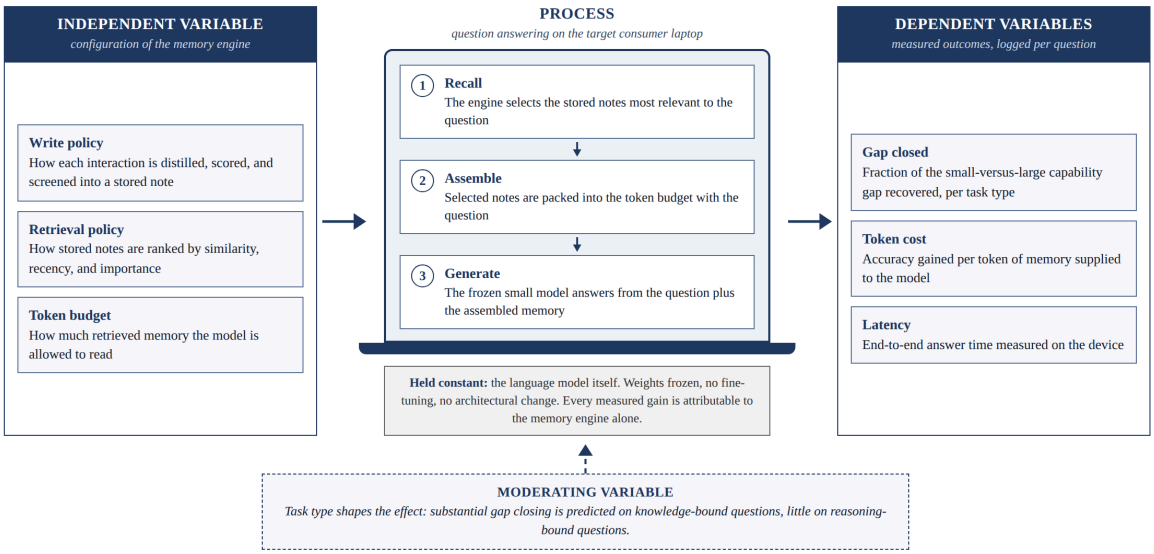


Figure 2.6: Conceptual framework of the study

The framework held for the engine as built, with one change in what each variable means. In the final engine the write policy keeps a moment as the model's notes in a room, the retrieval policy chooses one room and the closest moments within a reach, and the budget is the size of a room plus the moments re-read. The dependent variables gained two measures that matter once memory grows: the RAM of the whole process and the storage the memory takes on the SSD.

Chapter 3: **Methodology**

3.1 **Introduction**

This chapter describes how the study was carried out. It states the research paradigm that guided the work, the development approach that was followed, the analysis of what the system had to do, the design of both the system and the experiments that evaluated it, the tools and techniques that were used, and the deliverables the study produced. Throughout, the guiding principle was that the measurement apparatus was built and validated before the system it measures, so that every later design decision could be judged as a controlled experiment. Chapter 4 gives the full requirements and design, and Chapter 5 the implementation and results.

3.2 **Research Paradigm**

The study adopted a pragmatist research philosophy, combining design science research with controlled experimentation. Design science research is appropriate because the study created and evaluated a novel artefact, the memory engine, and the discipline's guidelines require that such an artefact be evaluated rigorously against explicit measures of utility (Hevner et al., 2004). The study followed the design science research methodology of Peffers et al. (2007), proceeding through problem identification, definition of solution objectives, design and development, demonstration, evaluation and communication. The evaluation took the form of controlled experiments organised as a research pipeline of four stages, described in the subsections that follow.

3.2.1 **Data Acquisition**

Evaluation data came from three sources, chosen so that knowledge-bound and reasoning-bound performance could be separated.

i. **Public question-answering benchmarks** for the baseline: PopQA for single-hop long-tail facts (Mallen et al., 2023), HotpotQA and 2WikiMultiHopQA for multi-hop facts (Z. Yang et al., 2018; Ho et al., 2020) and GSM8K for mathematical reasoning (Cobbe et al., 2021), with the document collections that accompany the factual benchmarks.

ii. **A scripted long project, the Long Haul,** written for this study because no public set tests a memory that grows over months. It is generated from a seed, so the same seed always gives the same script, and every planted fact has one answer a rule can check (Section 5.3.1).

iii. **Public suites from the Hugging Face Hub** for the engine's comparison with the cloud yardstick: MATH-500 (Hendrycks et al., 2021; Lightman et al., 2024), AIME 2025 and 2026 (Balunović et al., 2025), HARP correction pairs (Yue et al., 2024) and BABILong (Kuratov et al., 2024).

All public datasets are released for research use and were downloaded from their official distributions. Earlier development of the engine also used three scripted twelve-week lives of invented people

(Section 5.8.17).

3.2.2 **Data Preparation**

From each public benchmark, a fixed random sample of questions was drawn once, with a fixed seed, and reused across all conditions so that every comparison is paired. The baseline's memory was populated from the supporting document collections only, never from the question–answer pairs, so the experiment measured the engine's ability to surface relevant knowledge rather than to look up a planted answer. Distractor documents were included, so that retrieval had to discriminate, not merely fetch.

The Long Haul was prepared the same way. It was cut at fixed sizes (64,000, 256,000, 1 million and 2 million tokens, and after an extension 3 and 4 million). At each cut a checkpoint draws a stratified sample of the questions that can be asked there, ten from each family with a fixed seed, so every contender answers exactly the same 216 questions (E-30; decisions are cited by their number in the project's decision log, summarised in Appendix B). Questions are asked only after the history has been told, and asking never teaches: the engine's questions are read-only, so a question asked early does not help the same question asked later (E-31).

3.2.3 **Experimental Conditions**

The baseline ran three conditions on every question: a floor, in which the small local model answered alone; a ceiling, in which the large cloud model answered alone; and a treatment, in which the small model answered with the memory engine. The engine's evaluation kept the same logic but named the conditions by what each contender can see (Table 3.1): the model alone with the newest part of the history that fits its window ("bare"), the same model with the engine, and the cloud model alone with the newest part that fits its one-million-token window. Every contender read the same instructions, so that only what each one could see differed (E-32).

3.2.4 **Measurement and Validation**

Every answer in every condition was logged with the model, the engine's settings, the tokens read and written, the time to the first word, the total time, the retrieval time of each step, where the memory came from (RAM, SSD or words) and the RAM and disk in use. Answers were graded by rule, so the same answer always gets the same verdict and anyone can grade again. Each run wrote a dated record naming the machine, how busy it was and a fingerprint of the code that made it. Validity was protected by the paired design, by fixed seeds, by one measuring job at a time on the graphics processor (E-35), and by the threat mitigations in Section 3.5.6.

3.3 **Development Approach**

The system was developed incrementally, in small working stages, each evaluated before the next began. An incremental approach suited the study for two reasons. First, the central research instrument, the evaluation harness, had to exist before the engine, because every component of the engine was judged by its measurements; building measurement first removed the largest project risk,

which is discovering late that results cannot be produced. Second, the engine was designed as a chain of separable components, so adding them one at a time turned development into the comparisons that the fifth objective required.

Development ran in five increments.

i. **The baseline (CAMR v1).** The harness for the public benchmarks was built first and validated by a baseline gap measurement with no memory; then the text-note engine was added one component at a time (similarity retrieval and a token budget, then gating, entity bridging, verified answering and learning by lookup), each producing a measured row. Its results are summarised in Section 5.8.18.

ii. **Step 0, the ruler.** Before the new engine existed, three scripted lives, their quiz and the baselines that would judge it were built and measured on the MacBook Air (E-01 to E-13).

iii. **Step 1, rooms and notes.** The engine's first build stored the model's keys and values in rooms on the SSD; the room design was chosen on development lives, and pass marks were written before the held-out lives were run (E-14 to E-20).

iv. **Step 2, the event log.** Each answer's attention over the moments on the desk was recorded so that an answer could be replayed and inspected (E-21).

v. **The final engine and its proof.** The core, the tiers and sleep, the vault, reach, metrics and the Ollama pairing were added, and the engine was measured on the Long Haul against the Claude yardstick (E-29 to E-43).

3.4 System Analysis

This section analyses what the system had to do. The analysis studied the requirements that the research questions impose, since in this study the experiment itself is a primary stakeholder: every requirement traces to a measurement the study had to make. Users of the application are the second stakeholder. Chapter 4 lists every requirement with its source and verification method.

3.4.1 Functional Requirements

The system had to keep what it is told as stored memory, with the date and source of each item; store memory durably on the device; find, for an incoming question, the memory it needs; assemble that memory within a set budget and give it, with the question, to a frozen local model; let the user turn memory off and choose whose memory a question reads; and log, for every answered question, the model, the engine's settings, the tokens supplied and generated, the time of each step and the answer, so that every experiment can be reproduced from its records. The evaluation harness had to generate or load each test set deterministically, run each contender on identical questions, grade each answer by rule and write a record after every checkpoint.

3.4.2 Non-Functional Requirements

The system had to run entirely on the target laptop, with the sole exception of the cloud reference models, which are reached through an API and are not part of the engine. Finding memory had to add only a small fraction of the answer's time, and the time to the first word and the RAM in use had not to grow as the memory grew. All stored data had to remain on the device, and the engine had to work without a network once its models were downloaded. Spending on the cloud reference had to be capped and logged call by call. The whole experimental pipeline had to be runnable from documented commands, so that results can be regenerated and verified.

3.5 **System Design**

This section describes the design of the memory engine and, with equal weight, the design of the experiments that evaluated it.

3.5.1 **Architectural Overview**

The engine has three parts arranged around a frozen local language model. The write path runs when the user tells it something: the moment is embedded, placed in the room of its closest earlier moment if that moment is close enough and the room has space, and read once by the model with the room's earlier moments in view; the keys and values the model writes while reading are appended to the room's file on the SSD. The store is a folder of files: one file of notes per room, an index of every moment's words, day and place, a matrix of embeddings, and a vault of plain-text notes. The read path runs when a question arrives: the question is embedded, the moment closest to it is found, and that moment's room is laid in front of the model already read, after a small core of standing facts; the model then reads the four closest moments as words, the date and the question, and answers. Rooms used recently stay in RAM; others are read from the SSD in one burst; when the room files outgrow their disk budget, the weakest rooms go to sleep and are read as words. The model's weights and inference code are never changed. The baseline's architecture, a single SQLite file with a ranked, gated and bridged read path, is described in Chapter 4 for comparison.

3.5.2 **Experimental Design**

The central quantity of the baseline's evaluation was the fraction of the capability gap closed, computed for each task type by Equation 3.1, where S is the accuracy score of a condition on that task type.

$$\text{gap closed} = \frac{S_{\text{treatment}} - S_{\text{floor}}}{S_{\text{ceiling}} - S_{\text{floor}}} \tag{3.1}$$

A value of zero means the engine added nothing and a value of one means the small model with memory matched the large model. The engine's evaluation reports right answers out of the questions asked at each size of history, for each contender, because the ceiling itself changes with the size of the history: a cloud model that sees the whole history at 256,000 tokens sees only its last part at 2 million. Table 3.1 summarises the conditions.

Table 3.1: Experimental conditions

Condition	Model	Memory	Purpose
Floor (baseline) or bare (engine)	Small local model (0.5–3B for the baseline; Qwen3 1.7B, 4B, 8B for the engine)	None: the newest part of the history that fits its window	Lower anchor
Ceiling (baseline) or yardstick (engine)	Kimi K3 (baseline); Claude Haiku, Sonnet and Opus 5.5 (engine)	None: the newest part that fits its window	Upper anchor; the yardstick is not a contender with memory
Treatment	The same small model as the floor	CAMR v1 (baseline) or CAMR (engine), settings varied per experiment	Measures what each configuration adds
Memory as words	Qwen 27B; Qwen3 1.7B through Ollama	The engine's memory, chosen the same way, pasted in as text	Separates what the memory knows from how it is delivered

One design guard was enforced throughout: the questions were held out of what built the memory, so the experiment measured the engine's ability to surface relevant knowledge rather than to look up a planted answer. In the Long Haul a probe is planted early and asked late, and its right answer is resolved for the point at which it is asked.

3.5.3 **Datasets and Task Types**

The datasets were assigned to task types as in Table 3.2. A null result on a reasoning task was treated as a positive finding, since it would show that the engine does what it claims, supplying knowledge, and not what it does not claim.

Table 3.2: Evaluation datasets and the task type each represents

Dataset	Task type	Why it was included
PopQA (Mallen et al., 2023)	Knowledge-bound, single hop	Long-tail facts where small models fail severely (baseline)
HotpotQA (Z. Yang et al., 2018); 2WikiMultiHopQA (Ho et al., 2020)	Knowledge-bound, multi-hop	Answers combine facts across stored passages (baseline)
GSM8K (Cobbe et al., 2021)	Reasoning-bound (control)	Memory is predicted to help little (baseline)
The Long Haul (this study)	Both: facts, changed facts, look-alikes, two hops, corrected maths, code, a page, things never said	A memory that grows past every window; each family isolates one way of failing
BABILong (Kuratov et al., 2024)	Knowledge-bound, long context	Facts hidden in book text from 4,000 to 1 million tokens
HARP correction pairs (Yue et al., 2024)	Reasoning with a worked correction in memory	Whether a remembered worked solution carries to a new problem
MATH-500 (Lightman et al., 2024); AIME (Balunović et al., 2025)	Reasoning-bound, no memory	What each model can do on its own

3.5.4 **Evaluation Metrics**

Answer quality was scored with each benchmark's own rule: exact match and token-level F1 for the baseline's question-answering sets, the final answer for the mathematics sets, and, for the Long Haul, five verdicts given by rule (Table 5.5). An answer about something never told is right only if it declines; a guess is counted as a false memory, separately from facts known, so that declining cannot raise a score. Efficiency was reported as the time to the first word, the total time, the retrieval time of each step, the tokens read, the peak RAM, the disk taken by the memory and, for the cloud models, the dollars spent at list price. Medians and the 90th percentile are reported, since a few long answers would distort a mean.

3.5.5 **Comparison Procedure**

Each component of the engine was evaluated by changing it alone and measuring the result, holding everything else fixed. For the baseline the components were the write policy, recency and importance in the ranking, gating, entity bridging and the token budget. For the engine they were how notes are written and laid out (one moment at a time or a room at a time; one room or three), the size of a room and the number of moments re-read, the instructions the model reads, memory as notes against the same memory as words, the reach (session, project, global, project with global) and the cap on the graphics buffer cache. Each comparison is reported as a row stating the change in right answers and the change in time and memory.

3.5.6 **Threats to Validity**

The study guarded against the following threats. Answer leakage was prevented by building memory only from what the history tells, never from the questions. Prompt sensitivity was reduced by giving every contender the same instructions, pinned byte for byte by a test (E-32); the one exception, the 1.7B model's own wording, is reported both ways and was not chosen after seeing results on the test questions (E-37). Sampling error was addressed by paired comparisons on identical questions; the Long Haul's samples are small (34 to 73 questions per checkpoint), so differences of one or two answers are read as level. Timing noise was reduced by running one measuring job at a time, recording the machine's load with every record, and reporting medians. Instability of the cloud reference was handled by pinning model identifiers and recording the model that answered each request; no fallback model was ever used. Scorer error in grading by rule was checked by keeping every raw answer in the records so that any verdict can be checked by hand.

3.6 **Tools and Techniques**

This section describes the tools that were used to build the engine and the harness, and the role each played.

3.6.1 **Python**

The engine, the harness and the analysis were implemented in Python 3.12, the standard language of the research ecosystem the study draws on, with NumPy for vectors and the scientific Python stack for analysis and figures.

3.6.2 **MLX and Local Models**

The engine runs its models through MLX on the Apple-silicon graphics processor (Hannun et al., 2023), because it must read and write the model's key–value cache inside its own process. The models were 4-bit Qwen3 1.7B, Qwen3 4B Instruct 2507 and Qwen3 8B (A. Yang et al., 2025), with Qwen 27B (`Qwen3.8-27B-4bit`) as the larger local comparison. The baseline served Qwen2.5, Llama 3.2 and Phi models through Ollama, which was also used for the engine's pairing test.

3.6.3 **Hosted Inference APIs**

The cloud yardstick was Claude Haiku 5.5, Sonnet 5.5 and Opus 5.5, reached through the Anthropic API with pinned model identifiers, streaming, and a ledger that logs every call's tokens and cost against a hard cap of $60 for a night of runs. The baseline's ceiling was Kimi K3 through the Moonshot API.

3.6.4 **Embedding Model**

Moments are embedded by Qwen3-Embedding-0.6B (Zhang et al., 2025), run through MLX, which serves every contender so that differences between contenders are differences between memories (E-02). The baseline used the compact BGE embedder (Xiao et al., 2024).

3.6.5 **Storage on the Device**

The baseline stored notes, vectors and logs in one SQLite file with a vector-search extension, as proposed. The engine instead stores one append-only file per room on the SSD, read and written with the operating system's file cache bypassed so that every read is a real SSD read, beside a JSON index, a NumPy embedding matrix and a folder of Markdown notes. Chapter 4 (Table 4.10) gives the reason for the change.

3.6.6 **Application and Auxiliary Tools**

The application's front end is a native macOS application written in SwiftUI, which starts the engine as a local process and talks to it over the loopback address. Version control used Git and GitHub, with the tests that need no MLX run by GitHub Actions on every push; pytest ran the test suite; a headless Chromium checked generated web pages. All results were written as structured JSON records, so every figure and table in this report can be regenerated from them.

3.7 **Deliverables**

The study produced the following deliverables.

3.7.1 **The CAMR Memory Engine**

A documented, installable Python package implementing the write path, the store, the read path, the three layers, reach and metrics described in Chapter 4, runnable entirely on an Apple-silicon Mac, with a pairing that gives Ollama memory as words.

3.7.2 **The Evaluation Harness**

The Long Haul generator and grader, the runners for the engine, the bare models, Ollama and the Claude yardstick, the Hugging Face suites, and the baseline's benchmark pipeline, each reproducible from documented commands.

3.7.3 **Experimental Results**

The measured results of the engine and the baseline, with the dated records that support every number.

3.7.4 **The Application and System Documentation**

The native Mac chat application, which can answer with CAMR's memory, with RAG or with no memory, the user guide, the decision log and this report, including the instructions sufficient for an independent reader to reproduce the results (Appendix A).

3.8 **Ethical Considerations**

The study involved no human participants and no personal data. The baseline used established public benchmarks released for research use and an invented company. The engine was evaluated on scripted histories of invented people and an invented business, with Kenyan names and places; the only text sent to a cloud service was this scripted material, sent to the Claude yardstick under the provider's terms. All local models are open-weight models run on the Mac. Results are reported as they came out, including negative results and requirements that were not met. Cloud spending was metered call by call and capped. No user study was run, so no ethics approval was required; one would be needed before any study with real users (Chapter 6).

Chapter 4: **System Analysis and Design**

4.1 **Introduction**

This chapter presents the analysis and design of CAMR (Capability-Adaptive Memory Retrieval): what the system must do, the quality conditions it must satisfy, the data and interfaces it depends on, and the diagrams that communicate its structure and behaviour. Chapter 3 adopted design science research with controlled experimentation (Hevner et al., 2004; Peffers et al., 2007) and an incremental development approach in which the measurement apparatus is built before the artefact it measures. CAMR is an AI artefact judged by experiment rather than a transactional information system, so the chapter uses a justified hybrid of views. Ten diagrams are used, each because the project needs that view. Structured analysis (Gane–Sarson) gives the system boundary: the context diagram. Object-oriented analysis and design (UML 2.5), the paradigm that suits an artefact built as separable components refined in increments, gives the actors and services (use case diagram, with use case descriptions as a table), the evaluation workflow (activity diagram), the parts and their classes (component and class diagrams), the handling of one question (sequence diagram), the life cycle of memory (state machine diagram) and the hardware (deployment diagram). The baseline's relational store is shown by its logical schema, and the engine, which has no transactional database, by its file and data design. All diagrams are drawn from generator scripts kept with this report, so they can be redrawn and checked against the code.

CAMR was built in three stages (Table 4.1). The baseline, CAMR v1, stores short text notes in one SQLite file beside a frozen model. The engine's first build (the rooms build) replaced text with the model's own keys and values, saved in rooms on the SSD. The final engine added a core that stays in RAM, tiers that move rooms between RAM and the SSD and put them to sleep, a vault of linked plain-text notes, reach, per-answer metrics, an assistant around the memory and a pairing with Ollama. This chapter designs the final engine and keeps the baseline's design where the evaluation still uses it. Decisions from the project's decision log are cited as E-nn (Appendix B); the implementation, the application's screens and every measured result are reported in Chapter 5.

Section 4.2 states and traces the requirements. Section 4.3 presents the analysis diagrams and Section 4.4 the design diagrams. Section 4.5 justifies the changes from the proposal, and Section 4.6 summarises the chapter.

Table 4.1: The three stages of CAMR

Aspect	**CAMR v1: the baseline**	**The rooms build**	**CAMR: the final engine**
A memory is	A text note with embedding, importance, timestamps and source	A dated moment: its words, its embedding and the reader's keys and values at every layer	The same moment, also kept as a linked Markdown note in a vault

Store	One SQLite file with sqlite-vec	One append-only file per room on the SSD, a JSON index, a NumPy vector file	The same, plus tiers (RAM, SSD, asleep), a vault and one folder per reach or shelf
Read path	k nearest notes, gate, entity bridging, token budget	One room as notes, plus the four closest moments as words	The same desk after a core of standing facts; the room comes from RAM, the SSD or, when asleep, as words
Frozen reader	0.5B–3B models through Ollama	Qwen3-1.7B through MLX	Qwen3 1.7B, 4B or 8B through MLX; larger models and Ollama read the memory as words
Embedder	bge-small-en-v1.5	Qwen3-Embedding-0.6B	Qwen3-Embedding-0.6B
Cloud model	Kimi K3: ceiling and escalation	None	Claude Haiku, Sonnet and Opus 5.5, as a yardstick only
Interfaces	CLI, web app, inspector	One local web page	A native Mac chat app (CAMR, RAG or no memory, and Compare), the Ollama pairing, an OpenAI-compatible endpoint, a Python library

4.2 **System Requirements**

The system requirements identified for this project are presented in the following subsections. They were derived by working backwards from the objectives (Section 1.3.2) and the measurements the evaluation needs (Section 3.2.4), then revised as the three stages were built. Following ISO/IEC/IEEE 29148:2018, each requirement has a unique identifier, states one thing, and names its priority, source and verification method.

- **Priority:** MoSCoW (Must, Should, Could).
- **Source:** the objective (i–v) it serves; the stage it applies to (v1 for the baseline, E for the engine); and where the requirement or its threshold is recorded: the proposal (P §), the decision log (E-nn), the baseline's findings log (Fnn) or the code.
- **Verification:** inspection (I), demonstration (D), automated test (T) or measurement (M).

No threshold was invented. Every number comes from the proposal, a design constant in the code, or a pass mark written in the decision log before the run that tested it (E-19); otherwise the requirement is a comparison or a behaviour that can be shown. The stakeholders are the user, who needs private, offline and honest answers; the researcher, who needs reproducible measurements; and the supervisor and examiners, who need traceable evidence.

4.2.1 **Functional Requirements**

Functional requirements describe what the system must do. They fall into six groups, listed in full in Table 4.2:

- **The baseline's paths (FR-01 to FR-06).** Documents become screened, embedded notes; a question's nearest notes are ranked, gated, bridged and packed into the model's prompt.

- **Keeping memory (FR-07 to FR-11).** A moment is read once by the frozen model, placed in a room and appended to the room's file; it is also written to the vault; rooms move between tiers under budgets.
- **Answering (FR-12 to FR-17).** A question's room and closest moments are laid on the desk after the core, within the reaches the session reads; memory can be switched off; every answer is measured and logged.
- **Interfaces (FR-18 to FR-21).** Chat with code answered in it, the Code agent, the live view of the model at work, the pairing that gives other runtimes memory as words, and the event log.
- **The proof (FR-22 to FR-26).** The Long Haul is built from a seed, cut and sampled; every contender is told and asked the same; answers are graded by rule; the cloud yardstick is metered; every run writes a dated record.
- **The assistant (FR-27 to FR-32).** Questions are routed to memory or to the model's own knowledge; research, files and revision feed topic shelves; and memory can be switched between CAMR, RAG and off to compare them.

Table 4.2: Functional requirements catalogue

ID	Requirement	Priority	Source	Verification
FR-01	The baseline shall turn each document into notes under a configurable write policy (verbatim or structured).	Must	ii; v1; P §3.5.5	T
FR-02	The baseline shall reject empty, duplicate and instruction-like notes and record each rejection with its source.	Must	ii; v1; P §3.3	T
FR-03	The baseline shall retrieve the k notes most similar to a question and rank them by similarity alone or by Equation 4.1.	Must	ii; v1; P §3.5.1	T
FR-04	The baseline shall admit candidates by the gate of Equation 4.2 and add notes about entities named in admitted notes.	Must	ii; v1; F1, F1b	T, M
FR-05	The baseline shall pack admitted notes into a token budget and never exceed it.	Must	ii, v; v1; P §3.5.1	T
FR-06	The baseline shall run floor, ceiling and treatment conditions on one fixed sample and compute the gap closed (Equation 3.1).	Must	iv; v1; P §3.5.2	T
FR-07	The engine shall remember a moment by having the frozen reader read it once, with its room's earlier moments in view, and saving the keys and values of every layer.	Must	ii; E; E-15	T, M
FR-08	The engine shall place each new moment in a room by Equation 4.3.	Must	ii; E; E-18	T
FR-09	The engine shall append a moment's notes to its room's file and keep its words, day, room and embedding in an index.	Must	ii, iii; E; `rooms.py`	T

FR-10	The engine shall write each moment as a Markdown note in a vault, with links (doors) to notes it shares a room or an answer with, and a strength that fades each day it is unused (Equation 4.5).	Should	ii; E; E-29; `vault.py`	T
FR-11	The engine shall keep recently used rooms in RAM under a RAM budget, and put the weakest rooms to sleep, keeping their words, when the room files outgrow a disk budget (Equation 4.6).	Must	iii; E; E-29; `swap.py`	T, M
FR-12	For each question, the engine shall lay on the desk the room holding the moment closest to the question, after the header and the core, and then let the reader read the four closest moments as words, in date order.	Must	ii, v; E; E-16	M
FR-13	The engine shall read a room from RAM when it is hot, from the SSD in one burst when it is awake, and as words (or woken) when it is asleep.	Must	iii; E; `swap.py`	T
FR-14	The engine shall build a core of at most 256 tokens from vault notes tagged `core` and keep it in RAM as notes.	Could	ii; E; `core.py`	T
FR-15	A session shall read several reaches (session, project, agent, global) and write to one; a question shall choose the best room over every reach it reads.	Must	v; E; E-42; `reach.py`	T, M
FR-16	A session shall let memory be switched off, so that the plain model answers with the same prompt and no notes.	Must	iv; E; `reach.py`	T
FR-17	The engine shall record for every answer its time to the first word, total time, retrieval time per step, tier, bytes read, tokens in context, history held, peak RAM and disk (Table 4.9).	Must	iv; E; `metrics.py`	T
FR-18	The application shall offer Chat, in which a user tells, asks and requests code, which is returned as formatted code blocks; the Code agent used in the Code benchmark shall run every shell command only after the user's approval.	Must	iii; E; E-50	D
FR-19	The application shall show, only as the engine measures them and only when the user asks, the model's layers loading, the room an answer reads and where it came from, and each layer's activity for each word.	Should	ii; E; `live.py`	D, T
FR-20	A pairing proxy shall give Ollama, and any OpenAI-compatible local server, memory as words: the closest notes in front of the last user message.	Should	iii; E; E-33, E-47	T
FR-21	The engine shall log each remember, answer, sleep and wake as one line, with each written word's attention over the moments on the desk.	Should	ii; E; E-21	T
FR-22	The Long Haul shall be generated deterministically from its seed and cut at fixed sizes, each cut asking a stratified sample of 10 questions per family (all 3 for the page).	Must	iv; E; E-30	T

FR-23	Every contender shall be told the history one event at a time and asked the same questions with the same instructions; asking shall never teach.	Must	iv; E; E-31, E-32	T, I
FR-24	Every answer shall be graded by rule into one of five verdicts (Table 5.5).	Must	iv; E; `haul/grade.py`	T
FR-25	Every call to the cloud yardstick shall be logged with its tokens and cost, and refused if its worst case would pass the night's cap.	Must	iv; E; `bench/claude.py`, `bench/cost.py`	T
FR-26	Every run shall write a dated record after every checkpoint, naming the machine, its load, the code fingerprint and every answer.	Must	iv; E; E-12, E-40	T, I
FR-27	The assistant shall route each question, by the model's one-word answer, to memory or to the model's own knowledge, and send a question naming a person or business found in its closest notes to memory.	Must	ii; E; E-55; `assistant.py`	T
FR-28	Research shall read a Wikipedia page as marked data in the user's turn, never as instructions, and keep what it learns on the Research shelf, marked as from the web.	Should	iii; E; E-55; `assistant.py`	T
FR-29	Attached PDFs, images and videos shall be turned into words once (images and frames by a vision model) and kept on a shelf, marked as from a file.	Should	ii; E; E-44, E-57; `media.py`	T, M
FR-30	Before a moment is kept, a close earlier moment of the same source shall be judged SAME, UPDATE or NEW; an updated note is kept and the old one marked superseded, never deleted.	Should	ii; E; E-56; `revise.py`	T
FR-31	The application shall keep memory on topic shelves (Projects, Coding, Research, Personal), file a moment on "Auto" by meaning, and read every shelf for a question.	Should	v; E; E-51; `shelves.py`	T, D
FR-32	Chat shall answer a question with CAMR's memory, with conventional RAG over the same memory or with no memory, as the user chooses, and a Compare action shall answer it all three ways with each answer's measured first word and text read.	Should	iv; E; `chat.py`	T, D

4.2.2 **Non-Functional Requirements**

Non-functional requirements describe how well the system must operate and the constraints under which it must work. They use the ISO/IEC 25010:2023 characteristics relevant here (performance efficiency, reliability, security, maintainability, flexibility) and add model quality and honesty for the AI components (Table 4.3). A requirement later measured as not met is kept as written, so that Chapters 5 and 6 report it honestly.

Table 4.3: Non-functional requirements catalogue

ID	Category	Requirement	Priority	Source	Verification

NFR-01	Performance: time	With 2,000 words in the room on the desk, read from the SSD with the cache bypassed, the median time to the first word shall be under 0.5 s.	Must	iii, v; E; E-19 mark 1	M
NFR-02	Performance: time	At 2,000 words, answering from notes shall be at least 10 times sooner than reading the same desk as words.	Should	iii; E; E-19 mark 3	M
NFR-03	Performance: capacity	As the memory grows, the median time to the first word and the peak RAM shall not climb.	Must	iii, iv; E; E-20, E-38	M
NFR-04	Performance: resources	The room files shall stay within a disk budget (40 GB in the benchmarks; 8 GB per shelf in the app) and the hot rooms within a RAM budget (2 GB in the benchmarks; 512 MiB by default).	Must	iii; E; E-54; `swap.py`	M
NFR-05	Performance: resources	MLX's cache of freed graphics buffers shall be capped (1 GB by default), and every record shall log the process's real footprint.	Must	iii; E; E-40, E-41	M
NFR-06	Performance: time	Retrieval shall take at most 10% of answer time on the target device.	Should	iii, v; v1; F8	M
NFR-07	Model quality	Within one room, notes shall know at least 95% as many facts as the same desk read as words, with at most 3 extra false memories of 45.	Must	ii, iv; E; E-19 mark 2	M
NFR-08	Honesty	Answers about things never told shall be graded separately; a decline is right and a guess is a false memory.	Must	iv; E; E-08, E-30	T
NFR-09	Reliability	Local contenders in the benchmarks shall decode greedily with thinking off, so that re-runs give the same verdicts.	Must	iv; E; E-10, E-41	I, M
NFR-10	Security: privacy	All local inference and memory shall stay on the Mac once the models are downloaded; only research and the yardstick's benchmark runs reach a network service, and the yardstick sends scripted text only.	Must	iii; E; P §1.6	I
NFR-11	Security: integrity	The engine's server and proxies shall listen on 127.0.0.1 only, answer only requests that name the local host, and refuse requests from web pages; the app's server shall require the token made at launch.	Must	iii; E; `app/server.py`, `pair/ollama.py`, `Engine.swift`	T
NFR-12	Security: integrity	A reach folder shall be opened by one process at a time, and rooms written for one model shall not open with another.	Must	ii; E; `reach.py`, `rooms.py`	T
NFR-13	Reliability: measurement	Only one measuring job shall use the graphics processor at a time, and the app shall pause while a benchmark measures.	Must	iv; E; E-35	I

NFR-14	Cost	The yardstick's spending shall stay under $60 a night, with $2 of headroom held for the worst case of the next call.	Must	iv; E; E-29; `bench/claude.py`	T, M
NFR-15	Maintainability: testability	Every reported number shall be regenerable from records that carry a fingerprint of the code that made them.	Must	iv; both; P §3.7.2; E-12	T, I
NFR-16	Flexibility: adaptability	The tests that need no MLX shall run on Linux on every push.	Should	iv; E; `tests.yml`	T

4.2.3 **Data Requirements**

Data requirements describe the data the system needs, produces, protects and retains (Table 4.4). Neither stage trains the language model, so the separation of development and test data applies to the engine's settings and to the questions. In the baseline, settings were tuned on validation questions and confirmed once on held-out ones (F13, F15). In the rooms build, the development lives (seed 0) were used to choose the room design, and the proof lives (seed 1) were run only after the pass marks were written (E-19). In the final engine, no setting was tuned on the Long Haul: the room design came from the lives, and the instructions were fixed before any Long Haul result (E-32, E-37).

The Long Haul is synthetic by design. A memory that grows over months cannot be tested on a public question set, while a script knows its right answer on every day, including after a fact changes. It uses Kenyan names and places, which suits the intended users but limits the results to one invented project; the public suites are the real-data complement. No personal data enters any evaluation, and a user's own memory never leaves the Mac.

Table 4.4: Data requirements catalogue

ID	**Requirement**	**Priority**	**Source**	**Verification**
DR-01	The baseline shall use the official PopQA, HotpotQA, 2WikiMultiHopQA and GSM8K files, and its memory shall come only from supporting and distractor documents.	Must	iv; v1; P §3.2	I, T
DR-02	The Long Haul for seed 1 shall hold 17,786 events and 2,010,094 tokens over 110 working days, extended to 4.01M tokens with noise only, every probe unchanged.	Must	iv; E; E-30, E-39	T
DR-03	Each checkpoint shall sample 10 askable probes per family with seed 0; a cut where nothing new is askable shall reuse the sample before it.	Must	iv; E; E-30, E-39	T
DR-04	Each moment shall carry its date and the Long Haul's day number, as `[YYYY-MM-DD, day N] text`.	Must	iv; E; `bench/local.py`	I
DR-05	Each moment shall be stored as words in the index, an embedding row, notes in its room's file and a vault note whose tags record its source (user, file or web).	Must	ii; E; `rooms.py`, `vault.py`	T
DR-06	Room files shall only grow while awake; sleep shall delete a room's notes but never its words, and a superseded note shall be kept.	Must	ii; E; `swap.py`, `revise.py`	T

DR-07	Every record shall name the machine, chip, memory, power, load, library versions, commit and a hash of the code.	Must	iv; E; E-12, E-17	I, T
DR-08	Personal memory and saved conversations shall stay in folders under `~/.camr/` on the user's Mac.	Must	iii; E; `reach.py`	I

4.2.4 **Interface and Integration Requirements**

Interface and integration requirements describe how the user, the models and outside services meet the system. They are kept narrow so that each can be tested: the app reaches the engine only through a small JSON API on the loopback address, the models are loaded in-process through MLX, and outside services are reached only by research and the benchmark runners (Table 4.5).

Table 4.5: Interface and integration requirements catalogue

ID	Requirement	Priority	Source	Verification
IR-01	The baseline shall reach local models only through Ollama on the loopback address, and the cloud model under one pinned, logged identifier.	Must	iii, iv; v1; P §3.6	T
IR-02	The engine shall load its models through MLX and refuse a reader whose layers do not all keep keys and values with plain rotary positions.	Must	iii; E; E-26, E-44; `notes.py`	I
IR-03	The engine shall read and write room files with the file cache bypassed (`F_NOCACHE`), in 1 MB pieces eight at a time.	Must	iii; E; E-14	T, I
IR-04	The Mac app shall start the engine as a local process on a free port, send the token only after the engine reports holding that port, and use only the engine's JSON routes.	Must	iii; E; `Engine.swift`	D, T
IR-05	The engine's server shall return failures as JSON (403, 404, or 500 with the error) instead of dropping the connection.	Should	iii; E; `server.py`	I
IR-06	The Ollama pairing shall speak Ollama's own HTTP API on 127.0.0.1:11435 and forward everything else byte for byte to 11434.	Should	iii; E; E-33	T
IR-07	The OpenAI-compatible endpoint shall serve `/v1/` routes on 127.0.0.1:11436 in front of Ollama, LM Studio or mlx_lm.server.	Could	iii; E; E-47	T
IR-08	The yardstick runner shall stream every request, turn the SDK's retries off and never ask for a fallback model.	Must	iv; E; `bench/claude.py`	I
IR-09	Models and suites shall be loaded from the Hugging Face Hub once and read from a local folder afterwards.	Must	iv; E; `bench/suites`	I
IR-10	Research shall fetch only Wikipedia's public API over HTTPS, with a fixed timeout, and shall fail with a message rather than an answer when the page cannot be read.	Should	iii; E; `assistant.py`	T

4.2.5 **Requirements Traceability**

Every requirement links back to an objective and forward to a design element and to the evidence that verifies it (Table 4.6). Objective i is met mainly by Chapter 2, but it also shaped the system: the reviewed techniques were built as switchable choices so that their value could be measured.

Table 4.6: Traceability matrix

Objective	**Requirements**	**Design elements**	**Verification evidence (Chapter 5)**
i. Techniques and limits	FR-03, FR-04, FR-07, FR-12	Baseline read path (Equations 4.1 and 4.2); room design (Figure 4.4)	Baseline results; development evidence of the rooms build
ii. Design	FR-07 to FR-14, FR-21, FR-27 to FR-30, DR-05, DR-06, NFR-07	Memory, Rooms, Notebook, Tiers, Vault, Core, Event log, assistant (Figures 4.4 to 4.9)	Unit tests; test cases T-08, T-19 to T-21; rooms-build results
iii. On the device	FR-11, FR-13, FR-18 to FR-20, FR-31, NFR-01 to NFR-05, NFR-10 to NFR-13, IR-02 to IR-04	Tiers; deployment (Figure 4.10); the app	Test cases T-02 to T-07, T-11, T-12, T-15; speed and RAM results
iv. Evaluation	FR-06, FR-16, FR-22 to FR-26, DR-01 to DR-04, DR-07, NFR-08, NFR-09, NFR-14, NFR-15	Evaluation pipeline (Figure 4.3)	Long Haul, suites, multimodal and Code results; T-09, T-10, T-13, T-14, T-17
v. Budget and components	FR-05, FR-08, FR-12, FR-15, FR-31	Rooms of 512 tokens, join 0.80, four closest moments; reach; shelves	Desk and room-size comparisons; reach; notes against words; storage at 8 and 4 bits

4.3 **System Analysis Diagrams**

This section presents the diagrams used to analyse the system's boundary, its actors and services, and the workflow of its evaluation. Each is introduced by what it shows and why it is needed, and interpreted after the figure.

4.3.1 **Context Diagram**

The context diagram treats CAMR as one process and shows only what crosses its boundary. It fixes the scope of Section 1.6, in which the model and the memory run on the user's Mac, and shows which flows leave it (NFR-10, DR-08). It uses Gane–Sarson notation: CAMR is process 0, each shaded box is an external entity and each labelled arrow is a data flow; flows that exist only in the baseline are dashed.

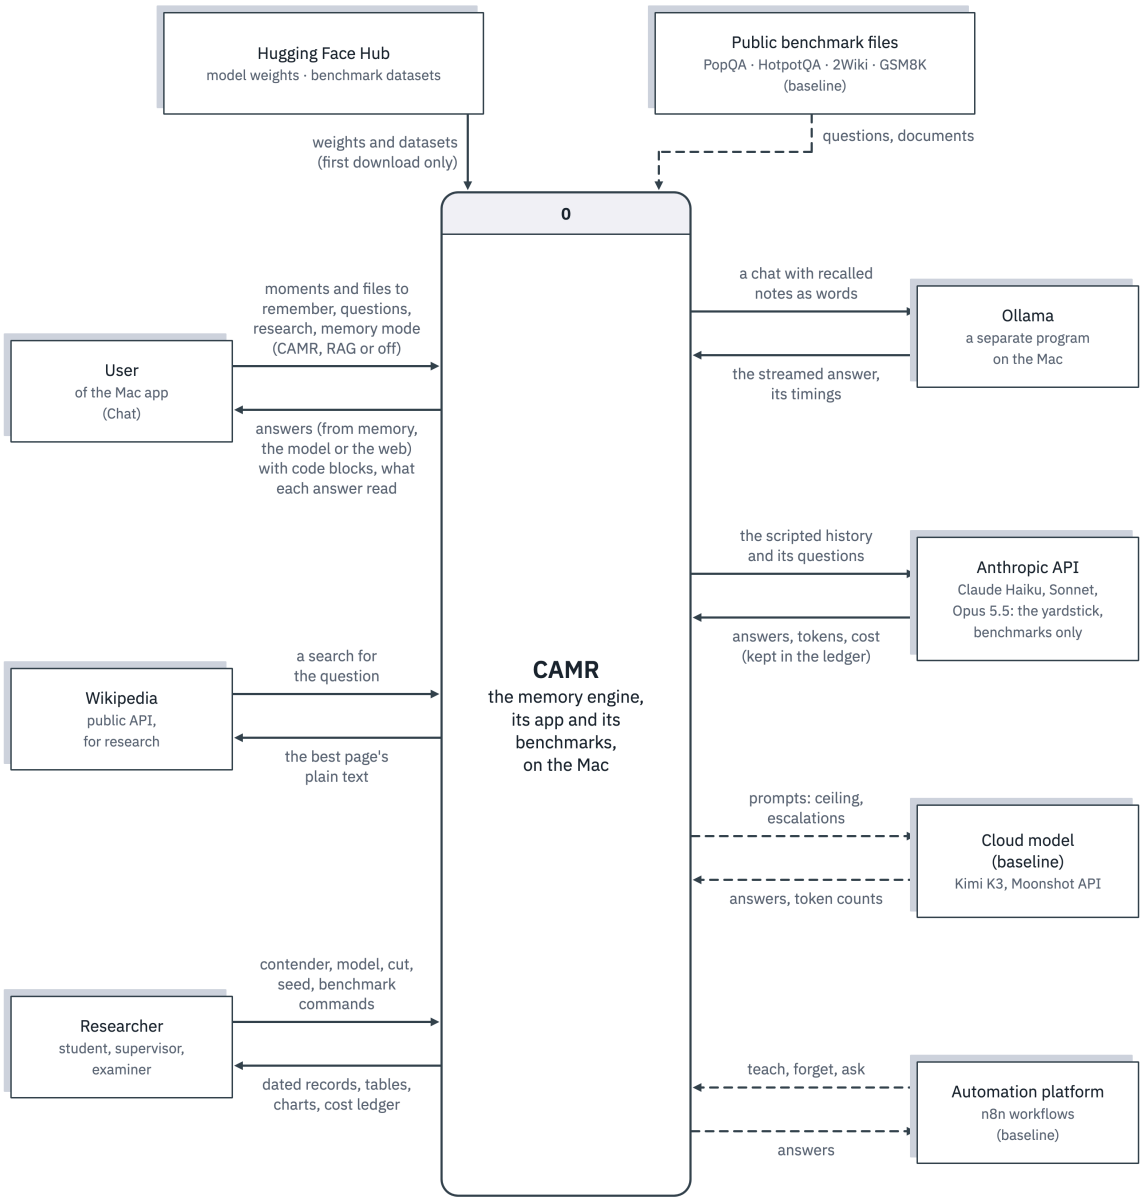


Figure 4.1: Context diagram of CAMR

The user's moments, files and questions flow into CAMR and their answers flow back, and nothing the user tells continues to an outside party. The flows that leave the Mac carry no personal memory. The Hugging Face Hub supplies model weights and the public suites once; afterwards they are read from the local cache. The Anthropic API receives the scripted Long Haul and the suites' questions, and only when the researcher runs the yardstick. Ollama is outside the boundary because it is a separate program that the pairing reaches over the loopback address; the engine's own models run inside its process. The diagram therefore presents CAMR in use as a closed system on the Mac, the privacy property that the problem statement requires.

4.3.2 **Use Case Diagram**

The use case diagram shows who uses CAMR and for what (Figure 4.2). Its actors are people and external systems only: the User, the Researcher, the Ollama command line and the Claude API. Rooms, the embedder and the event log are internal parts and are not actors. «include» and «extend» relations are dashed arrows, and generalisation is a hollow triangle.

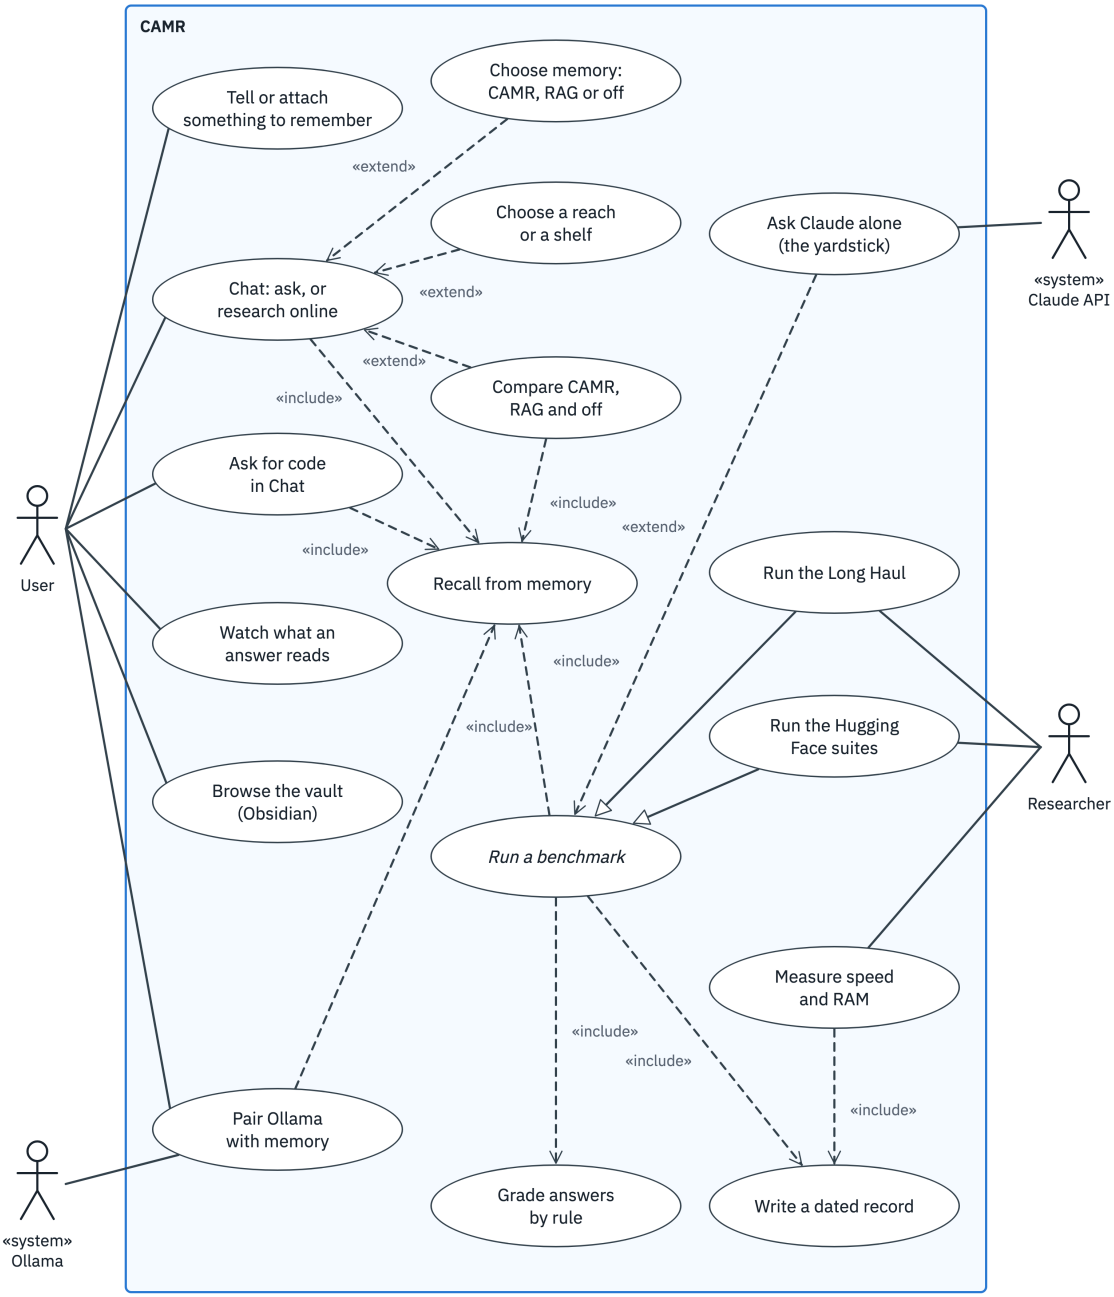


Figure 4.2: Use case diagram of CAMR

"Recall from memory" is included by every use case that answers: chatting, asking for code in Chat, comparing CAMR with RAG, the Ollama pairing and the abstract "Run a benchmark", which the Long Haul and the suites specialise. One read path therefore serves chat, agentic work and evaluation, so what is measured is what the user gets. Choosing the memory mode (CAMR, RAG or off),

comparing the three, and choosing a reach or shelf extend chatting. Asking Claude alone extends a benchmark: the yardstick answers the same questions with no memory. Watching what an answer reads, and browsing the vault, are a user's use cases rather than research tools only: they let a user see when an answer rested on the wrong moment.

4.3.3 **Use Case Descriptions**

Table 4.7 describes the main use cases of Figure 4.2: the actor, the trigger, the main flow, the alternative and exception flows, and the requirements each realises.

Table 4.7: Use case descriptions

Use case	**Actor and trigger**	**Main flow**	**Alternatives and exceptions**	**Requirements**
Tell or attach something to remember	User: types a moment or attaches a file	The moment is dated, judged against its closest earlier moment, filed on its shelf, read once by the model and kept	Same as a kept moment: not kept again. Updates a moment: kept, old one marked superseded. File: turned into words first; a picture needs the vision model, which is downloaded once	FR-07 to FR-10, FR-29 to FR-31
Chat: ask, or research online	User: sends a question	The question is routed; a memory question reads its room and closest moments and is answered; a general one is answered from the model's knowledge; the exchange is kept	Memory off: the model answers alone. Room asleep: read as words. Research: a page is fetched and read as data; no page found: the user is told. Stop: the answer ends at the next word	FR-12, FR-13, FR-16, FR-27, FR-28
Ask for code in Chat	User: asks for a function, a page or a fix	The question is routed to the model's own answer with enough room for code; the code is shown as formatted blocks with a Copy button, and the exchange is kept on a shelf	A question naming the user's own project reads memory first. Stop: the answer ends at the next word	FR-18, FR-27
Compare CAMR, RAG and off	User: asks a question with Compare	The question is answered three times, from CAMR's room already read, from the closest moments pasted as text, and with no memory; each answer shows its first word, text read and the room or chunks used	Compare answers are not kept in memory; the conversation is not used, so the three see the same question	FR-32
Watch what an answer reads	User: opens the weights view	The view draws the layers loading, the room read and each layer's activity for each word, from the engine's live events	No events: nothing moves	FR-19
Pair Ollama with memory	Ollama command line: sends a chat	The proxy recalls the closest notes, puts them before the last user message and forwards the chat; the exchange is remembered afterwards	Any other route is forwarded unchanged	FR-20, IR-06, IR-07

Run the Long Haul	Researcher: starts a run	Each contender is told the history, asked each checkpoint's questions read-only, graded by rule, and a dated record is written	Claude: a call whose worst case passes the cap is refused. A second measuring job waits	FR-22 to FR-26

4.3.4 **Activity Diagram: The Evaluation Pipeline**

The study's contribution is a measurement, so the workflow that produces each number is analysed as carefully as the engine. Figure 4.3 shows the Long Haul's pipeline as a UML activity diagram.

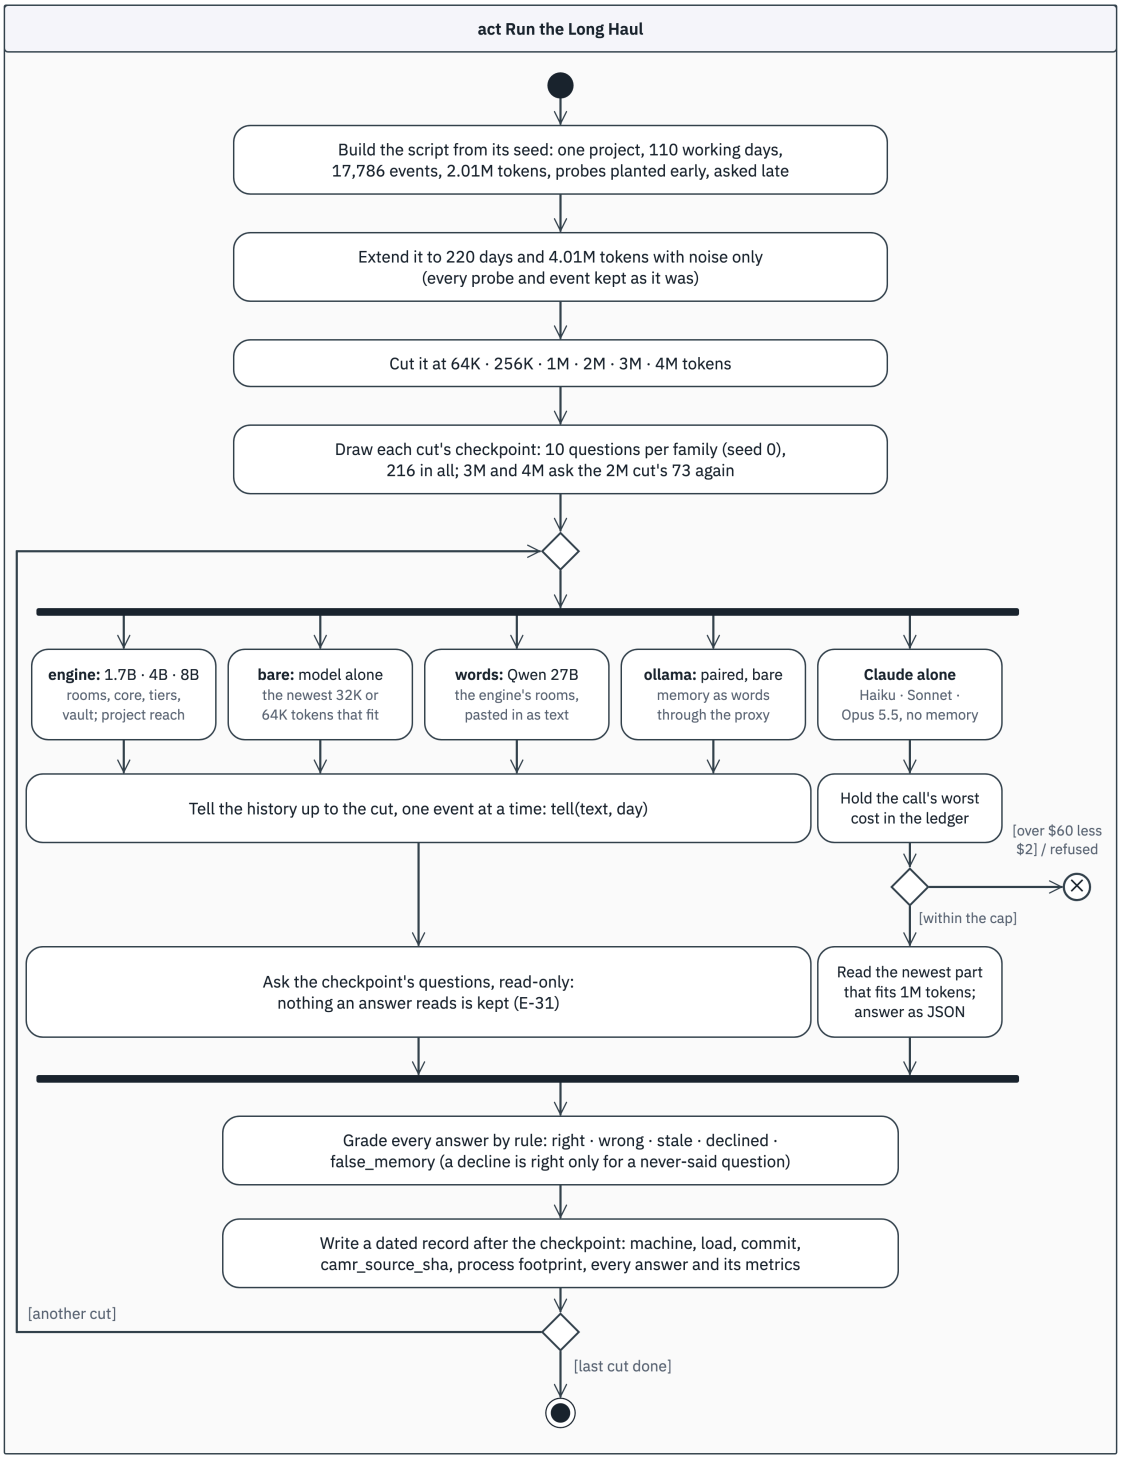


Figure 4.3: The evaluation pipeline of the Long Haul

The script is built once from its seed and cut at fixed sizes; at each cut, a checkpoint samples the questions that can be asked there. The pipeline then forks into one branch per contender. Each local contender is told the history one event at a time and then asked the checkpoint's questions, read-only. The yardstick instead reads the newest part of the history that fits its window, with every request held against the cost ledger before it is sent. The branches join at grading, which applies the same rules to every answer, and every checkpoint writes a dated record before the next cut is told. What is held constant is what makes the scores comparable: the same events, the same questions, the same instructions and the same grader for every contender (E-32). What differs is only what each contender can see.

4.4 **System Design Diagrams**

This section describes how the solution is organised to satisfy the analysed requirements: the architecture of the baseline and of the engine, the engine's classes, the assistant around it, the handling of one question, the life cycle of memory, the stored data and the deployment.

4.4.1 **Architecture of the Baseline, CAMR v1**

CAMR v1 has a write path and a read path that meet at one SQLite file, whose tables Figure 4.8 shows. Ranking follows Park et al. (2023), with similarity and importance normalised over the candidates and recency counted in question steps (Equation 4.1); the gate then decides how much of the ranked list the model sees (Equation 4.2).

$$\text{score}(n) = w_s(n) + w_r \gamma^{\Delta t(n)} + w_i(n) \tag{4.1}$$

Equation 4.1 is the composite score of note n (defaults $w_s=0.60$, $w_r=0.15$, $w_i=0.25$, $\gamma=0.99$; similarity only sets $w_s=1, w_r=w_i=0$).

$$n \text{ is admitted} \iff s_{max} \geq \tau \text{ and } s(n) \geq s_{max} - \delta \tag{4.2}$$

Equation 4.2 is the gate, where s_{max} is the best candidate's similarity (defaults $\tau=0.50, \delta=0.15$).

On the read path, the gate and entity bridging make the read path capability-adaptive: the gate admits fewer notes when the best match is weak, and bridging adds the notes about entities that admitted notes name, which finds the second hop of a question without a graph. The model is reached only through a loopback runner, and the cloud only in ceiling conditions or on escalation. Similarity became the default ranking after the composite score was measured (Section 5.8.18; Table 4.10).

4.4.2 **Architecture of CAMR**

CAMR changes what a memory is. Instead of text that the model must re-read for every question, each moment is kept as the notes the model wrote while reading it: the keys and values of every layer, which a transformer normally discards after a prompt. Laid in front of the model, they let it continue as if it had just read the moment. Notes are large (Equation 4.4), so they live on the SSD in rooms of related moments that are written as one continuous page and fetched in one read. A moment joins a

room by Equation 4.3. The application calls a room a "note" and groups memory by topic on "shelves" (Section 4.4.4); this thesis keeps "room" for the engine's unit.

$$\text{room}(m)=\text{room}\left(\underset{k:\, s_{mk}\geq J,\, T_{\text{room}(k)}+t_m\leq T_{\max}}{\operatorname{argmax}} s_{mk}\right),\ \text{else a new room} \tag{4.3}$$

In Equation 4.3, m is the new moment with t_m tokens, s_{mk} is its similarity to an earlier moment k, and T is a room's tokens ($J=0.80$, $T_{max}=512$; E-18).

$$b_{\text{token}}=L\times 2\times H_{kv}\times d_h\times 2 \text{ bytes} \tag{4.4}$$

Equation 4.4 gives the notes per token, for L layers, H_{kv} key–value heads, head size d_h and 16-bit values: 28 × 2 × 8 × 128 × 2 = 114,688 bytes for Qwen3-1.7B and 36 × 2 × 8 × 128 × 2 = 147,456 bytes for Qwen3 4B and 8B. A full room of 512 tokens is therefore 56 MiB for the 1.7B, about 29,000 times its text. To keep the SSD smaller, a room can also be stored at 8 or 4 bits, quantised in groups of 64 values, which takes 17/32 or 9/32 of its 16-bit size; each room's precision is recorded in the index, so rooms of different precisions can be read side by side.

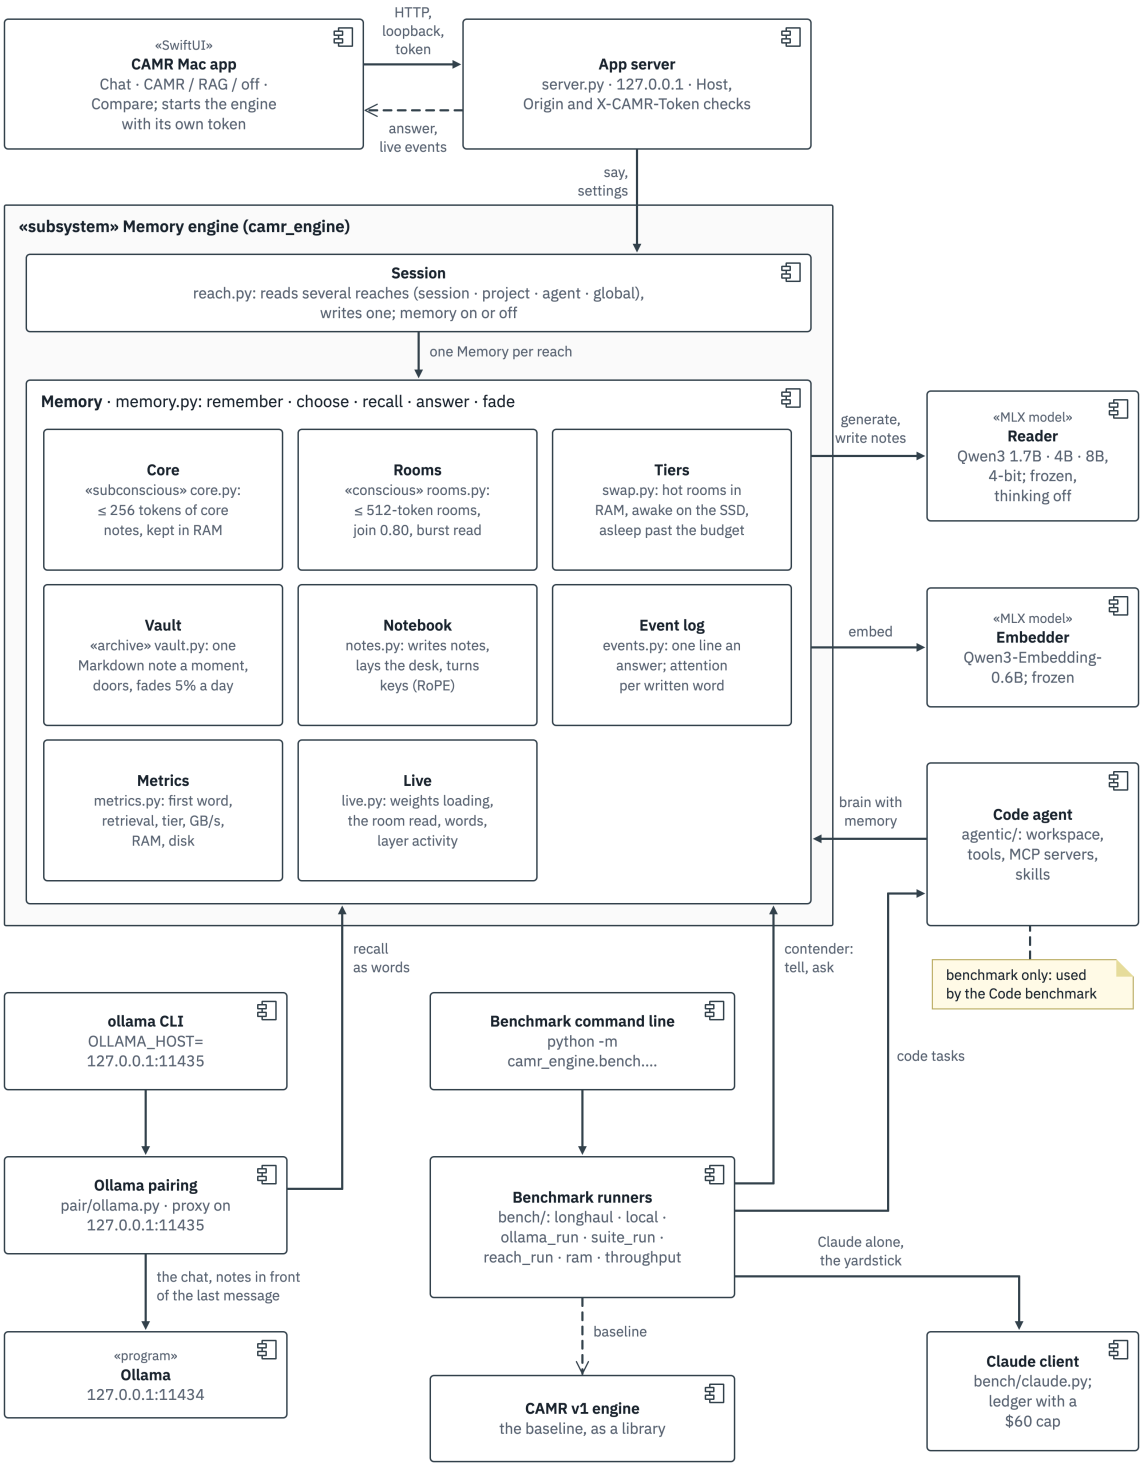


Figure 4.4: Component diagram of CAMR, the final engine

Each component has one responsibility (Figure 4.4). Rooms owns the room files and the index and knows nothing about models. The Notebook turns tokens into notes and notes into a desk, and is the only part that touches the reader's cache. The Tiers decide where each room's notes are: hot in RAM, awake on the SSD, or asleep as words. The Vault keeps every moment as a Markdown note that a

person can open in Obsidian, with links between notes that are used together and a strength that fades (Equation 4.5). The Core holds a few standing facts as notes in RAM. The Event log watches attention without changing it, Metrics times every step, and Live reports what a person can watch. Memory composes them into remember, choose, recall, answer and fade, and a Session composes one Memory per reach. The app, the Code agent, the pairing and every benchmark runner call the same Session or Memory, so the read path that is measured is the one the user meets.

$$s_n(d) = s_n(d_0) \times 0.95^{d - d_0} + u_n \tag{4.5}$$

In Equation 4.5, a vault note's strength s_n on day d is its strength on the day d_0 it was last brought up to date, reduced by 5% for each day unused, plus 1.0 for each of its u_n uses since then; a note at strength 1 that goes unused for about 45 days falls below 0.1 and counts as faded. Pinned notes never fade, and nothing is ever deleted by the engine. A room is as strong as its strongest note, and when the room files outgrow the disk budget the weakest room sleeps first (Equation 4.6).

$$\text{while } \sum_{r \in A} S_r > B_{\text{disk}} : r^* = \operatorname*{argmin}_{r \in A} \left(\sigma_r, \tau_r \right) \text{ sleeps} \tag{4.6}$$

In Equation 4.6, A is the set of awake rooms, S_r the size of room r's notes file, B_{disk} the disk budget, σ_r the room's strength (that of its strongest vault note) and τ_r the time it was last used; sleeping deletes the room's notes file and keeps its words.

Two findings from the development lives fixed the shape of a room and of the desk (E-15, E-16; Section 5.8.17). Moments written alone and laid side by side lost the thread for a small reader, so a room is written as one page, each moment read with the room's earlier moments in view. And one room plus the four closest moments as words knew more facts than either alone or than three rooms, so that is the desk. A single room sits where it was written, so its keys need no turning; with the core before it, a room sits further along the desk and its keys are turned by the core's length (Su et al., 2024).

4.4.3 **Class Diagram of the Engine**

The component diagram shows responsibilities; the class diagram shows the classes that carry them, with their main attributes and operations and the relationships between them (Figure 4.5). It is drawn from the engine's code, so its names are those of the implementation.

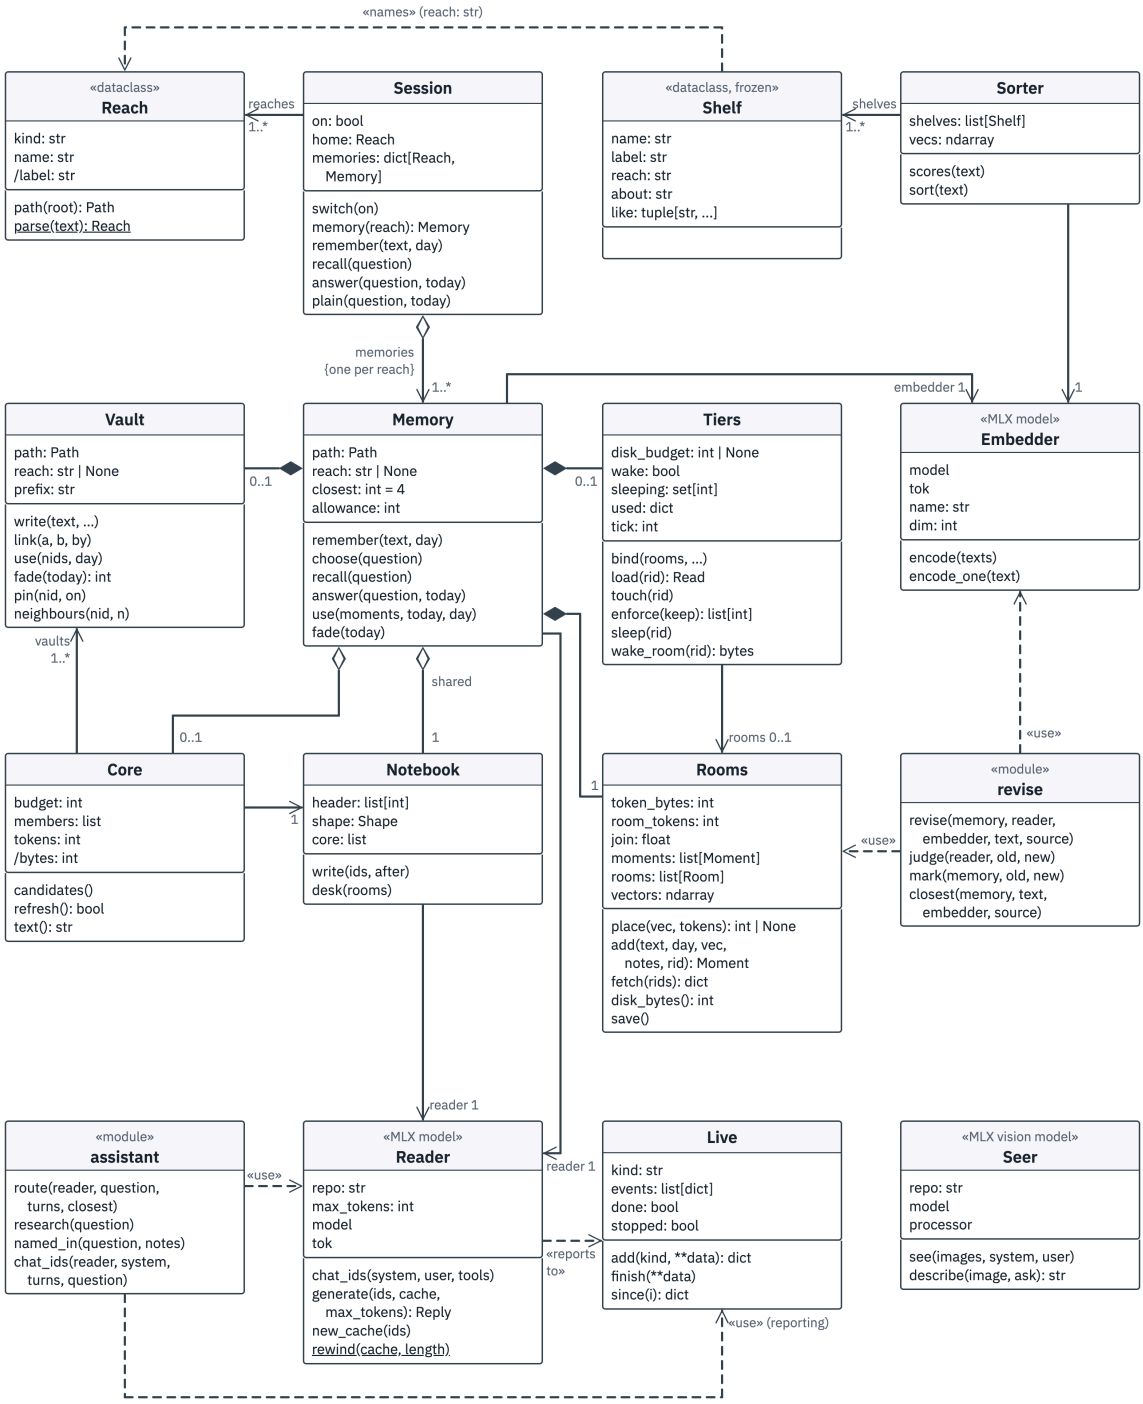


Figure 4.5: Class diagram of the CAMR engine

A Session holds the reaches it reads and aggregates one Memory per reach, so a question can be answered over several memories while each keeps its own folder. Memory is the centre: it is composed of its Rooms, and of a Vault and Tiers when they are enabled, which live and die with it, while it only aggregates a Notebook and a Core, because the Session builds one Notebook and shares it across every Memory, and a Core can be handed in from outside. Memory is associated with exactly one Reader and one Embedder, the frozen models, which it uses but never changes. Rooms knows

nothing about models: it places a moment, appends its notes and fetches whole rooms, and Tiers is bound to it to decide where those notes are. The Notebook is the only class that touches the Reader's cache, writing notes and laying the desk. The Sorter files a moment onto one of the Shelves by the Embedder's closeness, and a Shelf names the Reach it is kept in. The assistant and revise are modules of functions rather than classes: they use the Reader, Rooms and the Embedder through a Memory and add no state of their own, which is why the engine is unchanged when the assistant is not used. Reader reports what it does to a Live only when a Live listens, and the vision model, Seer, stands apart: only the application's chat route uses it, to turn a picture into words before they are remembered.

4.4.4 **The Assistant: Routing, Research, Files, Revision and Shelves**

In its final form the chat is an assistant built around the engine, as a set of components that reach memory only through a Session (Figure 4.4 shows the engine they use). It keeps the conversation and answers from the model's own knowledge, and it reaches into memory only when a question needs it. The closeness of the nearest memory cannot tell such questions apart, since a greeting can sit as close to a remembered moment as a question about the user's records. The design therefore lets the model route each question itself, with a one-word answer, MEMORY or GENERAL, that reads the question, the last two turns and the closest note in memory; a question that names a person or business found in its closest notes goes to memory without asking the model (FR-27; E-55). Only a MEMORY question fetches a room, and the router's word is never shown.

Five parts surround the router. Research looks a question up on Wikipedia (a search, then the best page's plain text); the page goes into the user's turn between markers as data, never into the instructions, and what is kept from it goes on the Research shelf marked as from the web (FR-28). Files are turned into words once: a PDF a page at a time as its text, and images and video frames by a vision model that also reasons, before the words are kept like any other moment, marked as from a file and not as the user's words (FR-29; E-57). Revision compares a new moment with the closest moment of the same source; only a close pair is judged by the model, in one word, SAME, UPDATE or NEW, and an update keeps the new moment and marks the old one superseded, never destroying it (FR-30; E-56). Shelves give the memory topics (FR-31; E-51): Projects is the global reach, which every session reads, and Coding, Research and Personal are project reaches, each with its own rooms and vault. A question reads every shelf and the closest moment wins; when another shelf's closest moment is nearly as close, it is read as well. A new moment goes on the shelf the user picks or, on "Auto", on the shelf whose description and examples it is closest to by the same embedder, so it is filed by meaning. When a session opens, a warm-up builds the model's kernels and reads the newest rooms of every shelf, up to 1.5 GB, so that the first questions find them in RAM (E-52). Finally, a memory mode lets the same question be answered with CAMR's memory, with conventional RAG over the same memory (the closest moments pasted in as text) or with no memory, and a Compare action asks it all three ways, so the difference between the pipelines can be seen on any question (FR-32). The

design keeps the engine unchanged: every part reaches memory through a Session, so routing, research and files cost nothing when they are not used.

4.4.5 **Sequence Diagram: One Question**

Figure 4.6 follows one question asked in Chat. Lifelines run left to right and time downwards; solid arrows with filled heads are calls, dashed arrows with open heads are returns, a looping arrow is work done inside one part, and a bar shows while a part is busy. The diagram realises FR-12, FR-13, FR-17 and FR-19, and shows where the wait of NFR-01 and NFR-03 is spent.

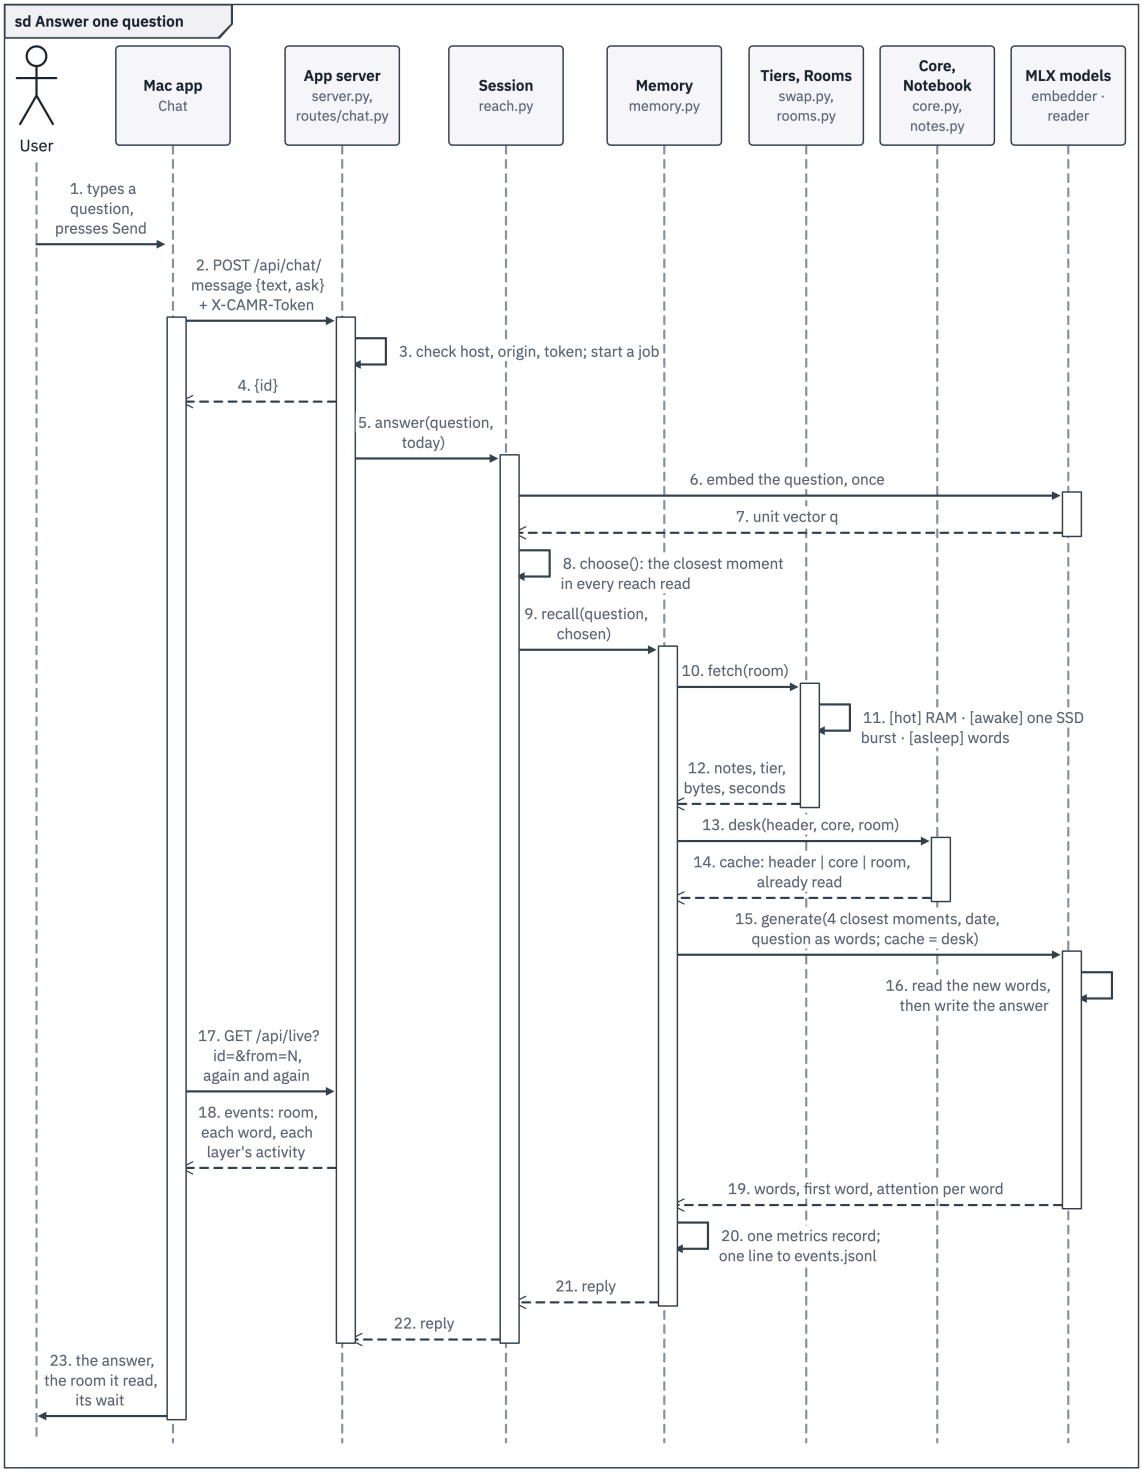


Figure 4.6: Sequence diagram of one question answered in Chat

The order of steps keeps the wait short. The question is embedded once, and the closest moment is chosen over every reach the session reads. The room is then fetched before the reader writes anything: from RAM when hot, in one SSD burst when awake, or as words when asleep. The header and the core are already notes in RAM, and the room arrives already read, so at question time the reader reads only the four closest moments, the date and the question as words. While the answer is written, the

app polls the live events and draws each word and each layer's activity. Every answer ends with one metrics record and one line in the event log. Because the desk is always one room and four moments, the work done before the first word does not depend on how much the memory holds; Chapter 5 measures this (Section 5.8.8).

4.4.6 **State Machine Diagram of a Room and Its Moments**

A moment and its room have coupled life cycles: placing a moment changes its room, a question moves a room onto the desk, and the disk budget can put a room to sleep. Figure 4.7 shows the three state machines; its guards are Equations 4.3, 4.7 and 4.5.

$$\text{share}_j = \frac{\sum_w a_{wj}}{\sum_w \sum_k a_{wk}}, \; j \text{ is used} \iff \text{share}_j \geq 0.10 \tag{4.7}$$

Equation 4.7 is the share of the desk's attention drawn by moment j over an answer, where a_{wj} is the attention from written word w to j's tokens, averaged over every head of layers 12, 16, 20 and 24 (E-21).

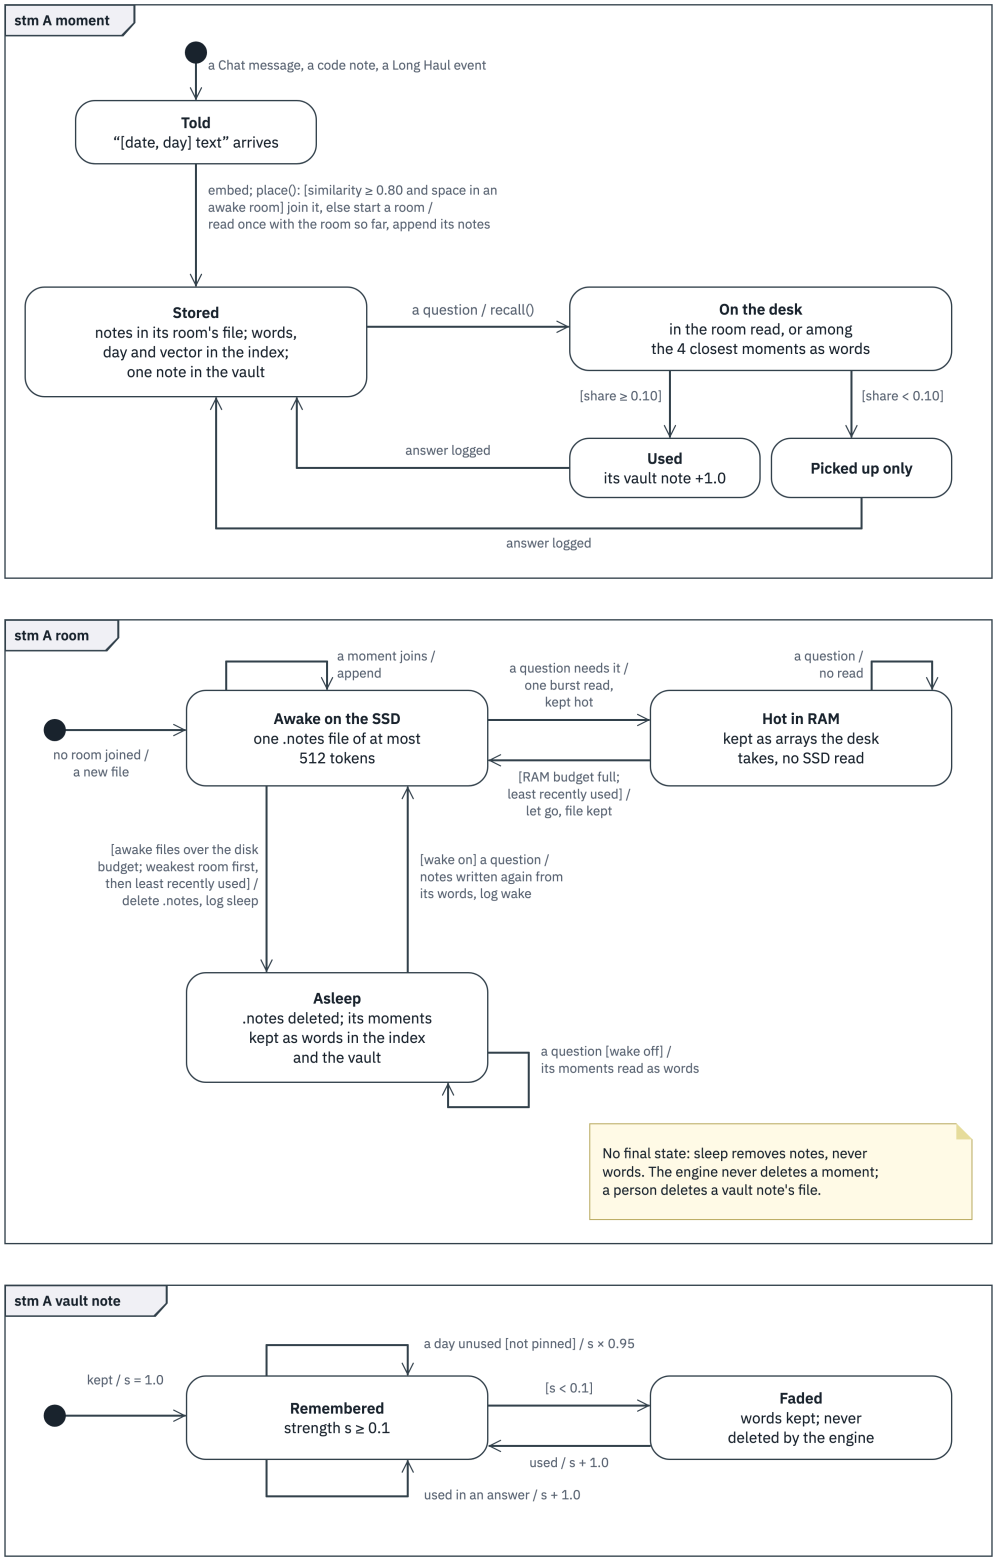


Figure 4.7: State machines of a moment, a room and a vault note's strength

A moment has no final state: once stored it only cycles between Stored and On the desk, where it is either used or only picked up. A room is awake on the SSD, hot in RAM after a read, and back to awake when it is the least recently used room and the RAM budget is full; letting a hot room go writes

nothing, since its file is still on the SSD. When the awake room files outgrow the disk budget, the weakest room goes to sleep: its notes file is deleted and its moments stay as words in the index and the vault. A question about an asleep room reads its moments as words, or wakes it when waking is on, which costs one reading of the room by the model. Sleep therefore keeps the SSD within its budget without destroying anything the user told.

4.4.7 **Logical Schema of the Baseline Store**

The baseline uses an embedded relational database, so a logical schema is the right view. Figure 4.8 shows its tables with their keys and cardinalities.

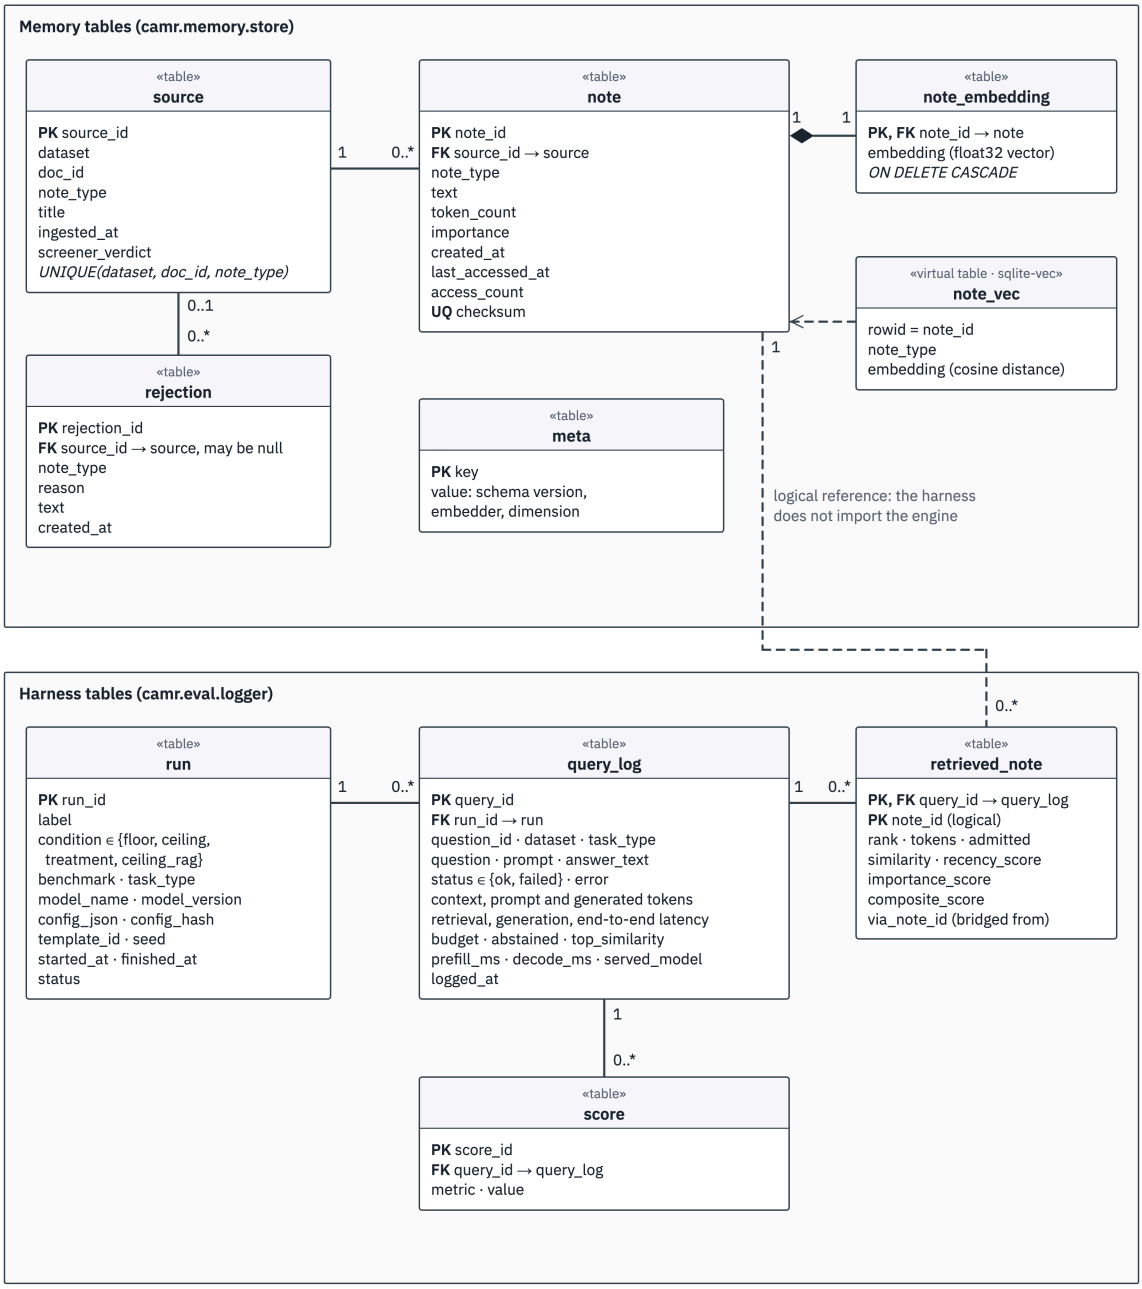


Figure 4.8: Logical schema of the baseline's store

The integrity rules carry the baseline's guarantees. Checksums are unique, and a source is unique per dataset, document and note type, so each write policy is its own note population in one file. A note and its embedding are committed together with a cascading delete, so no note lacks its vector. `meta` records the schema version, embedder and dimension, and a store refuses an embedder it was not built with.

4.4.8 **File and Data Design of CAMR**

CAMR has no transactional database, so a relational schema would misrepresent it. Each memory is one folder in which every file has one writer and one format, and each reach or shelf is a folder of its own under `~/.camr/` (Figure 4.9, Table 4.8).

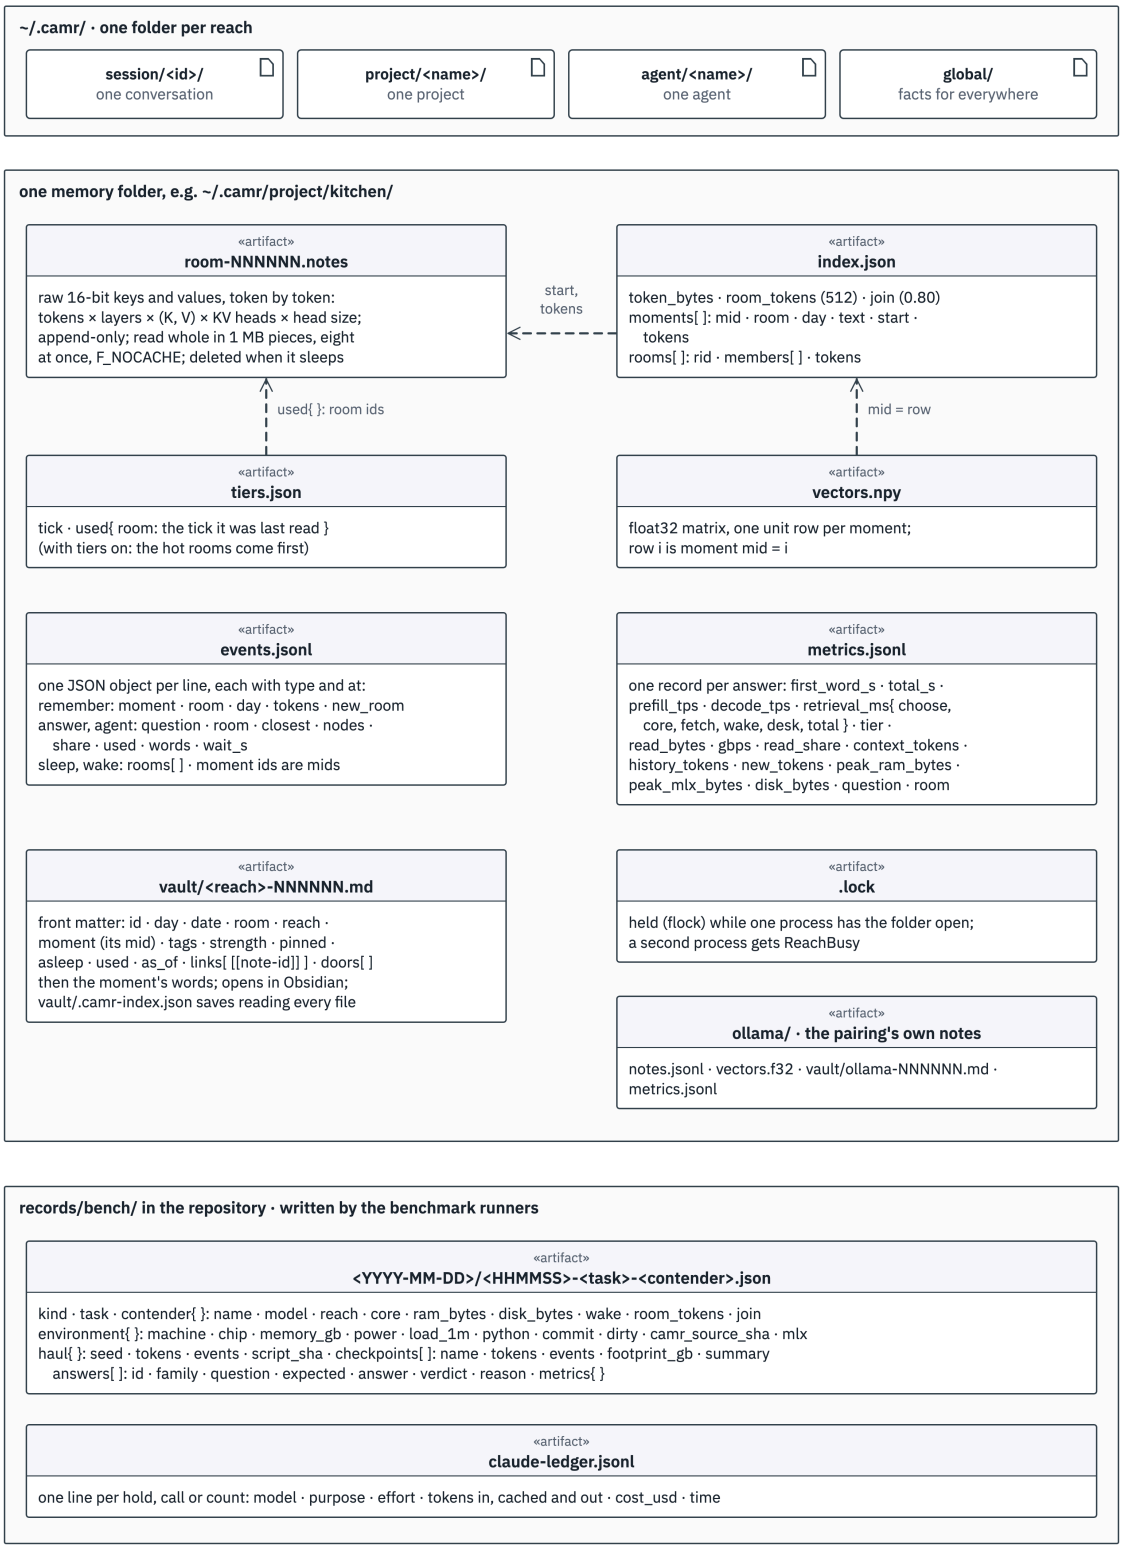


Figure 4.9: Files of a CAMR memory, its reaches and its records

Table 4.8: Files of a CAMR memory

File	Format	Written	Read

`room-NNNNNN.notes`	Raw 16-, 8- or 4-bit values, token by token (tokens × layers × keys and values × heads × head size)	Appended at each remember; deleted when the room sleeps	Whole, at recall, cache bypassed
`index.json`	Every moment's words, day, room and byte range; every room's members, tokens and precision	After each moment in a shared reach; at save	When the memory opens; for the words a desk re-reads
`vectors.npy`	float32 matrix, one unit row per moment	With the index	On opening; one product per question
`vault/*.md`	One Markdown note per moment: front matter (id, day, room, reach, strength, tags, links, doors), then its words	At each remember, fade and revision	By a person (Obsidian); by the core, sleep and revision
`events.jsonl`	One JSON line per moment kept, answer given, room put to sleep or woken	At every event	The app's views
`metrics.jsonl`	One JSON line per answer (Table 4.9)	At every answer	Summaries; the app
`tiers.json`	When each room was last used	With the index	When the memory opens
`.lock`	A lock held while a process has the folder open	On opening a reach	By a second process, which is refused
`chats/<id>.json`	One saved conversation: its turns and the shelf each answer read	After each answer	When a conversation is reopened

Files suit a workload with two operations: append a moment's notes to one file, and read one whole file. Each room is a contiguous array read in one burst, with no lookup and no database page cache in between, and bypassing the file cache makes every recall a real SSD read. The readable part of memory sits in a small index and the vault, which can be inspected without touching the notes. Files refer to each other by integer position: a moment's id is its row in `vectors.npy`, and its byte range in the room comes from the index. The notes' size per token, recorded in the index, stops another model from opening the memory (NFR-12).

Table 4.9: What every answer records

What	**Field**	**How it is counted**
Time to the first word	`first_word_s`	From the question to the first word: choosing, reading the room, laying the desk and reading the words all count
Total time	`total_s`	From the question to the last word
Prefill and decode speed	`prefill_tps`, `decode_tps`	Tokens read as words per second before the first word; tokens written per second
Retrieval time	`retrieval_ms`	Per step: choose, core, fetch (the SSD read), wake, desk, and total
Where the room came from	`tier`	RAM, SSD or vault (asleep)
Bandwidth	`read_bytes`, `gbps`	Bytes read from the SSD for this answer, and how fast
Context and history	`context_tokens`, `history_tokens`	Every token the model saw; every token the memory holds over every reach read

Peak RAM and footprint	`peak_ram_bytes`, `peak_mlx_bytes`, `footprint_gb`	The process's peak resident memory and MLX's own peak; in the benchmarks, the process's physical footprint per checkpoint
Disk	`disk_bytes`	The memory folders on disk: room files, indexes, logs and vaults

4.4.9 **Deployment Diagram**

Figure 4.10 shows where each part of CAMR runs: one Mac, its execution environments, the files on its SSD, and the outside parties that are used once, for research, or for benchmarks only.

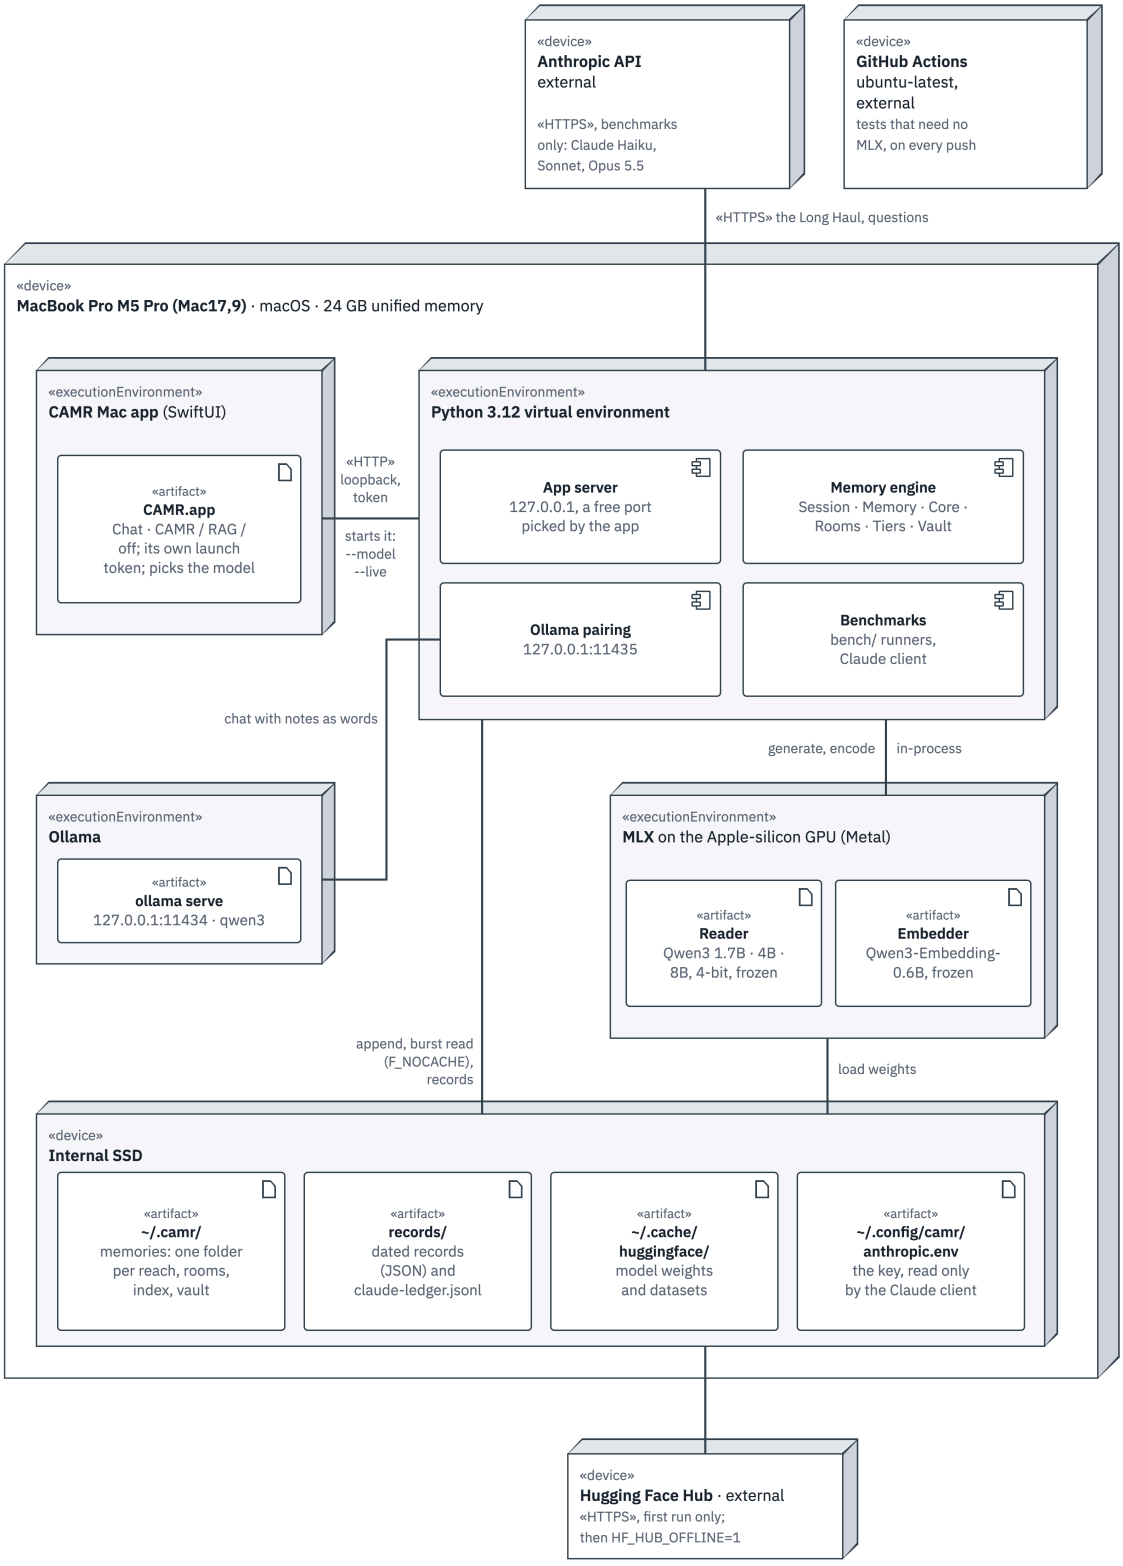


Figure 4.10: Deployment diagram of CAMR on the Mac

The Mac app is a SwiftUI process that starts the engine as a second, Python process with the chosen model and a token made at launch, and talks to it only over the loopback address (IR-04). The engine holds the reader, the embedder and, when a picture needs it, the vision model in unified memory

through MLX on the graphics processor; each model has its own memory folder, because notes belong to the model that wrote them. Ollama, when paired, is a third process that the proxy reaches on its own port. The Hugging Face Hub is contacted only when a model or suite is missing, Wikipedia only when the user asks for research, and the Anthropic API only by the yardstick's runner, with its key read from a private file and never logged. GitHub Actions runs the tests that need no MLX on every push (NFR-16).

4.5 **Design Changes Since the Proposal**

Building and measuring the three stages changed several choices that the proposal had fixed in advance. Table 4.10 states each change and the evidence for it, so that the diagrams, the code and the report describe the same system.

Table 4.10: Changes from the proposed design

Proposed	**Built**	**Reason and evidence**
An embedded database: SQLite with a vector extension in one file (P §3.6.5; objective iii)	The baseline as proposed; the engine stores one append-only file per room on the SSD, an index, a vector file and a vault	The engine stores the model's notes, 114,688 to 147,456 bytes per token (Equation 4.4), and only appends and reads whole files; bypassing the cache gives honest SSD timings (E-14)
Short structured notes of the text (P §3.5.1)	The model's own keys and values, read back as if just read	Reading notes back skips re-reading the text, and within one room notes answered as the words did (E-20; Section 5.8.17)
A 16 GB laptop with no dedicated graphics card, CPU inference (P §1.6)	The baseline on CPU-only 16 GB machines; the engine on a MacBook Air M4 (16 GB), then a MacBook Pro M5 Pro (24 GB)	MLX needs Apple silicon and uses its integrated graphics processor, not a dedicated card; the Pro was adopted for speed, with the Air's results kept (E-17)
Qwen2.5, Llama 3.2, Phi-3 through Ollama; a BGE embedder (P §3.6)	The baseline as proposed; the engine on Qwen3 1.7B, 4B and 8B and Qwen3-Embedding through MLX	The engine must read and write the reader's cache in its own process; one embedder serves every contender (E-02)
Ranking by similarity, recency and importance (P §3.5.1)	The baseline defaults to similarity, gate and bridging; the engine chooses the closest moment's room	The composite lowered full-support recall on both multi-hop sets (F1; Section 5.8.18)
A fixed token budget (P §3.5.1)	Rooms capped at 512 tokens plus four moments re-read	Larger rooms knew fewer facts at every setting tried (E-18)
A pinned hosted reference model as the ceiling (P §3.6.3)	Kimi K3 for the baseline; Claude Haiku, Sonnet and Opus 5.5 as a yardstick for the engine	A cloud model with a one-million-token window sees the whole history early and only its end later, so it is reported beside the engine, not as a fixed ceiling
Public benchmarks only; "not an end-user application" (P §1.6)	The Long Haul, the Hugging Face suites, and a Mac chat app	The claim is about a memory that grows over months, which no public set tests; the final project also needs a usable release

Parts of the design were planned but not built, because the remaining time went to the evaluation. No requirement above depends on them, and they are taken up as future work in Chapter 6: naps that run

on their own while the Mac is charging; distilling what was learnt, checked by a quiz before it is kept; settling unsure facts at recall; reading several rooms together; and the native engine (notes rather than words) behind the pairing and the OpenAI-compatible endpoint.

4.6 **Chapter Summary**

This chapter specified CAMR in three stages, using structured, UML and storage views suited to an experimental AI artefact. It stated 32 functional, 16 non-functional, 8 data and 10 interface requirements, each with a source and a verification method and without invented thresholds, and traced them to the objectives. The analysis presented CAMR as a closed system on the Mac and described its actors, main use cases and evaluation workflow. The design described the baseline's paths over one SQLite file; the engine's memory of saved notes in rooms on the SSD, read one room at a time after a small core with the four closest moments re-read as words; its classes; the assistant that routes, researches, reads files, revises, files by topic and compares CAMR with RAG; the life cycle of rooms between RAM, the SSD and sleep under fixed budgets; the files of a memory; and the deployment on one Mac. The main changes from the proposal were justified from evidence. Chapter 5 reports how this design was implemented, tested and evaluated.

Chapter 5: **System Implementation, Testing and Evaluation**

5.1 **Introduction**

Chapter 5 at a glance. What CAMR is. A language model writes text by predicting the next word, and it only knows what it absorbed in training and what is in front of it now. A model small enough for a laptop knows little and can hold only a short history in front of it. CAMR is a memory placed beside the model. Whatever the user tells it is read once by the model, and the notes the model writes to itself while reading (its keys and values) are kept on the Mac's SSD. For each question CAMR opens the one room of notes the question is about and lays it in front of the model, already read. The model itself is never changed.

What was tested. One scripted software project of 2 to 4 million tokens (the Long Haul) with 216 questions graded by rule; Qwen3 models of 1.7, 4 and 8 billion parameters with and without CAMR; a 27-billion-parameter model and Ollama reading CAMR's memory as words; Claude Haiku, Sonnet and Opus 5.5 answering alone as the yardstick; four public suites; four ways of sharing memory; and the time and RAM of every answer as memory grew.

What was found.

- At 2 million tokens, a 4B model with CAMR answered 29 of 73 questions; Claude Sonnet alone answered 32 and Opus 31. At 3 and 4 million tokens CAMR still answered 29, while Sonnet fell to 13 and then 10.
- Without CAMR, the same 4B answered 11 to 13 and needed a 15.2 GB process; with CAMR the process needed 5.4 to 7.5 GB once a graphics buffer cache was capped.
- The first word came in 0.2 to 0.3 seconds with CAMR, against 13 to 105 seconds for Sonnet and Opus.
- As memory grew from 112 thousand to 2 million tokens, the wait for the first word stayed at about 0.1 s and the RAM at about 4.3 GB (1.7B model); the SSD was held at its 40 GB budget by putting old rooms to sleep.
- Past 1M tokens most rooms were asleep, so most answers read their room as words; the saved notes bought speed where rooms were awake, not accuracy.
- CAMR helped most on facts told far back and declined almost every question about things never told. It did not help with joining two facts, or with building a page from a design decided weeks earlier; no contender, Claude included, managed that.
- Project memory was the best way to share memory (26 of 40); mixing in a second project cost 2 answers.

How to read the numbers. Most results are counts of right answers out of a set of questions, graded by rule. *Right* means the expected answer; for a question about something never told, a decline is right. *Declined* means the model said it did not know something it had been told. *First word* is the wait from the question to the first word of the answer. *Peak RAM* and *footprint* are the memory the whole process

> used. Every number comes from a dated record in the repository (`v2/records/bench/2026-11-04/`) or from the decision log (E-nn).

This chapter reports how the design of Chapter 4 was implemented, made available on the Mac, tested and evaluated, including where the system failed. CAMR is a hybrid project: an AI artefact evaluated by experiment and an application used through its interface. The chapter therefore follows the AI and machine-learning route of the department's guidelines, with the datasets described before the implementation and the evaluation, and adds the application's modules and user workflows from the software route. Section 5.2 describes the environment and Section 5.3 the data and its preparation. Section 5.4 describes the implementation of the engine, the assistant and the application, with the application's screens. Section 5.5 reports the test strategy, the test cases, and the defects and retests. Sections 5.6 and 5.7 give the implementation evidence and the use of AI tools. Section 5.8 presents the evaluation results, and Section 5.9 discusses them objective by objective, with the failures and the limitations. Conclusions and recommendations are left to Chapter 6.

5.2 **Implementation Environment**

> **In plain words.** CAMR runs on one Apple-silicon Mac. The model, the memory and the app stay on that Mac; the internet is used to download the models and public datasets once, and, in the benchmarks only, to ask the Claude yardstick.

5.2.1 **Hardware and Deployment Environment**

CAMR is a local prototype: a repository, an installer and an application that run on the user's own Mac. Nothing was deployed for public access. Development began on a MacBook Air M4 with 16 GB, the laptop class of the proposal's scope (Section 1.6). From 3 November 2026 every contender was run on a MacBook Pro M5 Pro, and every result of the final engine comes from that machine (Table 5.1).

Table 5.1: Implementation environment and minimum requirements (from each record's `environment` field)

Item or layer	**Minimum tested specification or version**	**Purpose and justification**	**Evidence or source**
Evaluation and app machine	MacBook Pro Mac17,9, Apple M5 Pro, 24 GB unified memory, internal SSD, macOS 27.2	Every Long Haul, suite, reach, speed, multimodal and Code run, and the app; 24 GB holds the 8B reader, the embedder and the vision model together	`environment` of the records; E-17
First development machine	MacBook Air M4 (Mac16,12), 16 GB, fanless	The rooms build's baselines and room design (E-14 to E-16); the laptop class of the proposal	`records/2026-11-02/`; E-17

Minimum to run	An Apple-silicon Mac with 16 GB for the 1.7B reader (tested on the Air); 24 GB for the 4B and 8B readers and the vision model (tested on the Pro). M1 to M3 Macs and 8 GB Macs were not tested	MLX runs only on Apple silicon; the installer refuses other machines	`scripts/install.sh`; the records
Storage	The internal SSD; free space for the models (about 1 to 5 GB each) and a disk budget per shelf (8 GB by default in the app, 40 GB in the benchmarks)	Room files are read from the SSD with the cache bypassed; the budget bounds what memory may take	`swap.py`; E-54
Specialised hardware	None dedicated. MLX uses the chip's integrated graphics processor	The reader's keys and values are read and written inside the process	Table 4.10
Network	Model weights and suites downloaded once; Wikipedia when the user asks for research; the Anthropic API for the yardstick only	Private, offline use (NFR-10)	`bench/claude.py`; `assistant.py`; `HF_HUB_OFFLINE`

The records note the power source and the one-minute load when each run started; the 4B's 3M and 4M rerun, for example, ran on AC power at a load of 4.33. One measuring job used the graphics processor at a time, run from a queue that logs each job's start and end (E-35).

5.2.2 **Software, Services and Configuration**

Table 5.2 lists the software and models as tested; their versions come from each record's `environment` and `contender` fields.

Table 5.2: Software and models (versions as tested)

Component	**Version**	**Role**
Python; NumPy	3.12.12; 2.5.4	The engine, the app's engine process, the harness
MLX / mlx-lm	0.32.4 / 0.32.2	Run the models on the graphics processor and expose the key–value cache (Hannun et al., 2023)
Readers (frozen, 4-bit)	`Qwen3-1.7B-4bit`, `Qwen3-4B-Instruct-2507-4bit`, `Qwen3-8B-4bit` (A. Yang et al., 2025)	The engine's contenders
Larger local model	`Qwen3.8-27B-4bit`	Reads CAMR's memory as words (its linear-attention layers keep no keys and values)
Vision model (frozen, 4-bit)	`Qwen3-VL-4B-Thinking-4bit`, through mlx-vlm	The app's eyes: describes images and video frames once, reasoning before it describes (E-57)
Embedder (frozen)	`Qwen3-Embedding-0.6B-4bit-DWQ` (Zhang et al., 2025)	Every contender
Ollama	0.13.5, `qwen3:1.7b` (Q4_K_M)	The pairing: memory as words
Anthropic API	`claude-haiku-5-5`, `claude-sonnet-5-5`, `claude-opus-5-5`; effort "medium", adaptive thinking	The yardstick, alone

SwiftUI app	macOS 14 or later, built with the Swift command-line tools	The native front end (Chat, Code)
CAMR v1 as a library	camr 0.4.0 with sqlite-vec 0.1.9	The baseline contender on the scripted lives
Wikipedia	The public MediaWiki API over HTTPS	Research: one search and one page per question, read as data (E-55)

The engine's settings are constants in the code, recorded in each record's `contender` field: rooms of at most 512 tokens, a join threshold of 0.80, four closest moments re-read, 2 GB of RAM for hot rooms and 40 GB of disk for room files in the benchmarks, the graphics buffer cache capped at 1 GB, and Qwen3's thinking off for every local model in the benchmarks. In the app, rooms are stored at 8 bits by default and each shelf has an 8 GB disk budget (E-54), and a thinking build may think before it answers. Answers get room by family: 1,200 tokens for a page, 600 for code, 400 for maths and 120 for the rest.

5.2.3 **Deployment and Reproducibility**

The engine installs with one script on an Apple-silicon Mac, which checks the machine, creates a Python 3.12 environment, installs the engine and its models, and runs a health check that teaches a throwaway memory two dated facts and asks for one back. A `camr` command then starts the app, the Ollama pairing or the OpenAI-compatible endpoint (E-48). The Mac app is built from its Swift package into `CAMR.app`, which is copied into the Mac's Applications folder, appears there and in Launchpad like any other application, and starts the engine itself. Every benchmark can be rerun with the commands in Appendix A, and every run writes a dated record to `records/bench/<date>/` after every checkpoint, naming the machine, its load and a hash of the code that made it (`camr_source_sha`). Three limits apply: records written before the rename on the evening of 4 November keep the old field names; no run was repeated for variance; and the Claude yardstick's answers depend on the provider's service on that day.

5.3 **Dataset Description**

> **In plain words.** The main test is an invented software project, told event by event over 110 working days and then 110 more, with questions about things said weeks earlier. It is fixed by its seed, so anyone can build the same one. Four public test sets add mathematics and long-text reading.

5.3.1 **The Long Haul**

The Long Haul is the study's own hard test (E-30). It is one scripted project: a developer building the website and back office of "Mama Njeri's Kitchen", a catering business in Nairobi, over 110 working days. It mixes chat, meetings, decisions, code, documents, logs, a mathematics course and noise. The script for seed 1 has 17,786 events and 2,010,094 tokens (counted with Qwen3-1.7B's tokenizer), from 22 September 2025 to 27 February 2026. For the 3M and 4M cuts it was extended by 110 more working days of noise only, from the same generators with random streams of their own; the first 110 days and every probe were kept exactly as they were, checked event for event (E-39).

Probes are planted early and asked late, and each has one answer a rule can check (Table 5.3). One example of an invented rule: the delivery fee is 1% rounded up to the next 5 shillings, at least 10, and a flat 25 for exact multiples of 1,000, so 12,000 gives 25 and 7,321 gives 75. A model cannot know such a rule from training; it can only remember it.

Table 5.3: What the Long Haul plants and asks

Family	Probes	Planted	Asked	Graded
Facts	400	Facts at random depths	Far past every window	Exact
Changed facts	80 facts, 160 questions	Each changed 2 to 4 times, with dates	The value now, and the value on a past date	Exact; an old value is stale
Two hops	40	Two halves, weeks apart	A question that needs both	Exact
Corrected maths	40 problems, 120 questions	A hard problem, a first answer with the tempting wrong method, then a step-by-step correction; some corrections state a rule invented for the project	The same problem; the method with new numbers; the invented rule on a new case	Exact number; the uncorrected method's number is stale
The page that grows	3	A design system in week 1; the main colour changes on day 61	"Build the catering page" on day 110	HTML and CSS checks
Code that must fit	20	Five helper modules with exact names, units and quirks	New code that calls them	Unit tests run on the answer, in a sandbox
Look-alikes	30	Two Wanjirus, prices one shilling apart, near-identical repository names	Aimed at one of each pair	Exact
Never said	60	Nothing	Questions on things never told	A decline is right; a guess is a false memory

The script is cut at six sizes. At each cut, a checkpoint takes a stratified sample of the probes askable there, 10 from each family (seed 0), each resolved to its right answer at that point (Table 5.4). Early cuts have fewer questions because some families are not askable yet. The 3M and 4M cuts ask the 2M cut's 73 questions again, so any change in score there is the weight of the longer history, not new questions (E-39).

Table 5.4: The cuts and their checkpoints

Cut	Tokens told	Events told	Last day	Questions
64K	63,860	551	7	34
256K	255,952	2,343	16	40
1M	999,988	8,760	56	69
2M	1,999,743	17,699	110	73
3M	2,999,988	26,244	after day 110	73 (the 2M questions)
4M	4,000,000	34,936	after day 110	73 (the 2M questions)

Every answer receives one of five verdicts (Table 5.5). The same answer always gets the same verdict, grading costs nothing, and anyone can grade again from the raw answers kept in each record. A contender's score at a cut is its accuracy, the share of the cut's questions graded right (Equation 5.1); the tables give the counts R and Q, and Figure 5.11 the shares.

$$\text{accuracy}_c = \frac{R_c}{Q_c} \tag{5.1}$$

In Equation 5.1, R_c is the number of answers graded right at cut c and Q_c the number of questions asked there (34, 40, 69 or 73).

Table 5.5: The verdicts

Verdict	**Meaning**
right	The expected answer; for a never-told question, a decline that does not then guess
wrong	Something else, a look-alike's value, or code or a page that fails its checks
stale	A value an update replaced, the uncorrected method's number, or the old main colour
declined	Says it does not know, but the answer was told
false memory	Answers a question about something never told, or declines and then guesses

Synthetic-data risk. A scripted project cannot establish real-world performance on its own. Each fact is told once or a few times, the questions follow templates, and there is one project. The Long Haul compares memories fairly on such a history, built to be hard in known ways; the public suites and the baseline's public benchmarks are the real-data complement.

5.3.2 **Public Suites from the Hugging Face Hub**

Four public suites were loaded, sampled with a seed and graded by their own rules (Table 5.6). They were run on the Claude yardstick and on Ollama, paired and bare; the engine's own MLX contenders were not run on them, because their instructions are the Long Haul's and a suite needs its own (E-36).

Table 5.6: The public suites as run

Suite	**Source**	**What it tests**	**How it was run**
BABILong	RMT-team/babilong (Kuratov et al., 2024)	bAbI facts hidden in book text	qa1 to qa5 at 4k, 16k, 64k and 128k tokens, 100 items; the story told in chunks of about 512 tokens, then its question
MATH-500	HuggingFaceH4/MATH-500 (Lightman et al., 2024)	Competition problems	50 problems of levels 3 to 5, no memory; graded by the last boxed answer's value
AIME	MathArena aime_2025 and aime_2026 (Balunović et al., 2025)	30 problems a year, each a whole number 0 to 999	60 problems, no memory; exact
HARP pairs	aadityasingh/HARP (Yue et al., 2024)	Problem A and its worked solution as context, then a new problem B of the same subject and level	60 pairs; memory on: A and its solution told, 30K tokens of Long Haul noise, then B and A asked; memory off: B and A with nothing told

5.3.3 **Data of the Earlier Stages**

The rooms build was developed and judged on three scripted twelve-week lives of invented people (a university student, a dairy-cooperative manager and a software developer), each with about 330 notes and the same 100 questions every week: 45 single facts, 15 updated facts, 10 facts told across two notes, 15 dates and 15 things never told (E-05). Development lives (seed 0) were used for every design choice, and held-out proof lives (seed 1) were run only after the pass marks were written (E-19). The baseline used PopQA, HotpotQA, 2WikiMultiHopQA and GSM8K with fixed samples (seed 13), a store built from supporting and distractor paragraphs only, and a 200-question held-out set for its final claims.

5.3.4 **Data Preparation and Partitioning**

The raw data became model input in four steps, the same for every contender.

i. **Dating.** Each Long Haul event was turned into one moment that carries its date and day number, as `[YYYY-MM-DD, day N] text` (DR-04), because the questions ask about days by number. For example, the event "Wanjiru says the delivery van is booked for Thursday" told on day 37 becomes `[2025-11-11, day 37] Wanjiru says the delivery van is booked for Thursday.`

ii. **Counting and cutting.** Tokens were counted with Qwen3-1.7B's tokenizer, and the script was cut at fixed token counts (Table 5.4), so a cut is the same text for every contender.

iii. **Chunking for the suites.** BABILong stories were told in chunks of about 512 tokens, then the question was asked; HARP's problem A and its worked solution were told as one moment, followed by 30,000 tokens of Long Haul noise.

iv. **Files to words.** In the multimodal test and the app, a PDF became one moment per page of its text, an image its description and the text written in it, and a video one described frame every 2 seconds with its time (E-44); each such moment is marked as from a file.

There was no training, so partitioning concerns the settings and the questions. Settings were chosen on development data only and then frozen: the room size and the desk on the development lives (seed 0), the baseline's budget and gate on validation questions. The held-out data, the proof lives (seed 1), the Long Haul and the suites, were run only after the settings and the instructions were fixed (E-19, E-32). Asking was read-only, so no question could teach the memory the answer to a later one (E-31). Duplicate and paraphrased probes within the Long Haul are of one script and one seed, so they are always in the same partition.

5.4 **System Implementation**

> **In plain words.** The engine is a Python package of a few thousand lines. A moment is read once by the model and its notes are appended to a room file; a question picks one room, reads it from RAM or the

SSD, and the model reads only a few lines more before it answers.

5.4.1 **The Engine's Modules**

The implementation follows Figures 4.4 and 4.6. Table 5.7 lists the engine's main modules with their sizes on 5 November.

Table 5.7: The engine's main modules (`v2/camr_engine/`)

Module (lines)	**What it does**	**Requirements**
`rooms.py` (182)	Places a moment by Equation 4.3; appends its notes to the room file; fetches a whole room in 1 MB pieces, eight at once, with the cache bypassed; cuts a room file back to its indexed length on opening (E-27)	FR-08, FR-09, IR-03
`notes.py` (157)	Turns tokens into notes and notes into a desk; refuses scaled rotary positions; turns keys to a new position	FR-07, IR-02
`memory.py` (411)	Remember, choose, recall, answer and fade; composes the parts below	FR-07, FR-12
`swap.py` (307)	The tiers: hot rooms in RAM under a budget (least recently used first out), awake rooms on the SSD, sleep past the disk budget, waking	FR-11, FR-13, NFR-04
`vault.py` (613)	One Markdown note per moment; doors between notes; strength fading 5% a day; reads a person's edits back	FR-10
`core.py` (92)	The core: at most 256 tokens of notes tagged `core`, kept in RAM	FR-14
`reach.py` (318)	Sessions over several reaches; one lock per reach folder; the memory switch	FR-15, FR-16, NFR-12
`metrics.py` (169)	One record per answer (Table 4.9); medians and 90th percentiles	FR-17
`events.py` (108); `live.py` (186)	The event log with attention per written word; the live events the app watches	FR-19, FR-21
`models.py` (258)	Loads the models through MLX, layer by layer; greedy decoding, thinking off; caps the graphics buffer cache	NFR-05, NFR-09
`pair/` (1,053)	The Ollama pairing proxy and the OpenAI-compatible endpoint, with their security checks and metrics	FR-20, IR-06, IR-07
`shelves.py` (154)	The four shelves, the Auto sorter and the warm-up	FR-31
`assistant.py` (132); `revise.py` (93)	The router, Wikipedia research, thinking; SAME, UPDATE or NEW before a moment is kept	FR-27, FR-28, FR-30
`media.py` (333); `shrink.py` (213)	Files into words (PDF pages, images and video frames through the vision model); rooms stored at 8 or 4 bits	FR-29, NFR-04
`app/` and `agentic/`	The engine's server and its JSON routes, the Code agent's tools, workspace and approval gate	FR-18, IR-04, IR-05, NFR-11
`bench/`	The Long Haul generator and grader, the local, Ollama and Claude runners, the suites, the reach and RAM runners, the cost ledger	FR-22 to FR-26

5.4.2 **Write Path, Read Path and Tiers**

Every choice of memory rests on one closeness measure, the cosine of two embeddings (Equation 5.2). Embeddings are stored as unit vectors, so the cosine is a single dot product, and a question is compared with every moment in one matrix product; the moment with the highest closeness gives the room that is read, and a new moment joins a room only when its closeness to a moment there is at least 0.80 (Equation 4.3).

$$s(a,b)=_{a}\cdot_{b}=\cos\theta_{ab},m^{*}=\underset{m}{\operatorname{argmax}}\, s(q,m) \tag{5.2}$$

Here $_{a}$ and $_{b}$ are the unit embeddings of moments a and b, q is the question and m ranges over every moment kept. The notes a room holds take the size given by Equation 5.3, which is Equation 4.4 multiplied by the room's tokens.

$$S_{notes}=n\times L\times 2\times H_{kv}\times d_{h}\times b \tag{5.3}$$

For n tokens, L layers, H_{kv} key–value heads of size d_{h} and b bytes per value (2 at 16 bits), a full 512-token room is 512 × 28 × 2 × 8 × 128 × 2 = 58.7 MB on the 1.7B and 512 × 36 × 2 × 8 × 128 × 2 = 75.5 MB on the 4B and 8B.

Two implementation choices from the rooms build matter for every result. Each room is written as one continuous page, so a new moment is read with its room's earlier moments in view (E-15). A single room is laid on the desk without turning its keys, which cut laying the desk from 55 ms to 15 ms at 2,000 words (E-18). The final engine added three things to that path. Every moment carries its date and day number, as `[YYYY-MM-DD, day N] text`, since the Long Haul asks about days by number. Rooms move between tiers: in the benchmarks, 2 GB of RAM held the hot rooms and 40 GB of disk the awake room files, and at the end of the 2M-token history 920 rooms were awake and 4,471 asleep (E-38). The disk budget is kept by the rule of Equation 4.6: while the awake room files outgrow the budget, the weakest room goes to sleep, ties going to the room used least recently.

A question whose room is asleep reads that room's moments as words, which costs reading them as plain text would; waking was off in the benchmarks. Finally, the benchmark's questions were read-only: the hot rooms, the least-recently-used clock and the vault strengths were restored after every answer, so that asking never teaches (E-31).

5.4.3 **Model Selection and Configuration**

No model was trained or fine-tuned; the study's claim is about a memory beside a frozen model (Section 1.6). The readers were selected for what the engine needs and what the Mac holds. A reader must keep keys and values at every layer with plain rotary positions, so that its notes can be saved and laid back (IR-02); the Qwen3 family meets this, and its 1.7B, 4B and 8B builds span the sizes a 24 GB Mac can run with the embedder beside them. Qwen3.8-27B was kept as a larger reader of the memory as words, because most of its layers keep a running state instead of keys and values (E-26). One embedder, Qwen3-Embedding-0.6B, serves every contender, so that every memory chooses rooms by

the same closeness (E-02). The vision model was chosen for the app by the same rule as the readers, a frozen 4-bit model that runs in MLX, and as a reasoning model, Qwen3-VL-4B-Thinking, whose thinking is removed before its description is kept (E-57). The multimodal benchmark had already been run with Qwen2.5-VL-3B and Gemma 3 (Section 5.8.12).

The engine's settings were fixed before the held-out runs: rooms of at most 512 tokens with a join threshold of 0.80 and four closest moments re-read, chosen on the development lives (E-18), and the yardstick's instructions for every contender, with the 1.7B also run under the engine's own wording once the cause of its declines was found (E-37). In the benchmarks every local model decoded greedily with thinking off (NFR-09). In the app, a hybrid thinking build (Qwen3 1.7B and 8B) may think before a general answer, within 2,400 tokens of thinking and 700 of answer, while the 4B Instruct build answers directly. Rooms are stored at 8 bits by default in the app, since 8-bit rooms answered as 16-bit rooms did at about half the disk (Section 5.8.10).

5.4.4 **The Vault, the Core, Reach and the Switch**

Every moment is also written to the vault as a Markdown note whose front matter holds its id, day, date, room, reach, strength and links. The vault opens in Obsidian as it is, and a note edited by hand is read again because its file changed. In the benchmarks the core was on but empty, since every moment was told untagged. A `Session` reads several reaches and writes to one; each reach is a folder of its own under `~/.camr/`, locked while a process has it open, and a question picks the best room over every reach it reads. With the switch off, the model answers alone with the same prompt and no notes, and the answer still gets a metrics record, so on and off compare directly.

5.4.5 **The Assistant: Routing, Research, Files and Revision**

The assistant of Section 4.4.4 was implemented in `assistant.py`, `revise.py`, `shelves.py` and the chat route of the engine's server. The router asks the reader for at most three tokens with no live events, so its word is never shown or measured as an answer; before asking, the five closest notes are checked for a name the question carries, with possessives removed, and a match goes to memory outright (E-55). A memory question also reads the closest moment of every other shelf whose closeness is within 0.12 of the best, so a moment filed on another shelf is not lost to a crowded one. A general question is answered with the last six turns of the conversation; a thinking model's reasoning is split from its answer and shown folded. Research uses Wikipedia's search and page-text API with a fixed timeout and a named user agent; the page is cut to 6,000 characters, its angle brackets are neutralised so that it cannot close its markers, and it is placed in the user's turn between `<source>` markers; links in answers are kept only when they are `http` or `https`. Attachments are read by `media.py`: PDF and text pages directly, images and video frames through the vision model, which is downloaded the first time a picture needs it. Revision compares a new moment only with moments of the same source, decided by the vault note's tags (`user`, `file` or `web`) and never by the words; a pair closer than 0.78 is judged in one word, and a moment is left out as SAME only when the pair is also at

least 0.95 close and the word is exactly SAME (E-56). Conversations are saved one file per chat under the memory's folder, under identifiers checked against a fixed pattern before any file is opened.

5.4.6 **The Application: Modules, Integration and User Workflows**

The application is a Swift package of eight source files that builds into `CAMR.app`, signed for the Mac it was built on and installed in the Applications folder; the build script installs each new build there and keeps only a zip elsewhere, so one copy of the application is registered on the Mac. Its modules are the engine process (`Engine.swift`), Chat (`Chat.swift`), the weights view (`Weights.swift`), the settings window, the theme, the application shell, and a rehearsal script runner used to capture the screens. When it starts, it starts the engine as a local process with the chosen model (Qwen3 1.7B, 4B or 8B), a free port and a token only it knows, waits for the engine's line saying it holds that port before it sends the token, and then talks to it over the loopback address (IR-04). Each model has its own memory folder, since notes belong to the model that wrote them.

The application is Chat only. An earlier Swarm screen was removed (E-50), and the Code screen was folded into Chat, so that a coding request is answered in the conversation as other chat assistants answer it, while the Code agent remains in the engine for the Code benchmark. Colour carries meaning only: memory is cyan, the model amber and the cloud yardstick grey (E-34, E-49). The screens below were captured from the running application with a real memory of the Long Haul (737 to 742 rooms); they illustrate the workflows, and the evidence that each requirement was met is in the test cases (Section 5.5).

Starting. When the app starts, it draws the model's layers filling as their weights load (Figure 5.1); the memory panel shows how many rooms the memory holds. If the engine cannot start, the window says why and where it looked, instead of waiting without end.

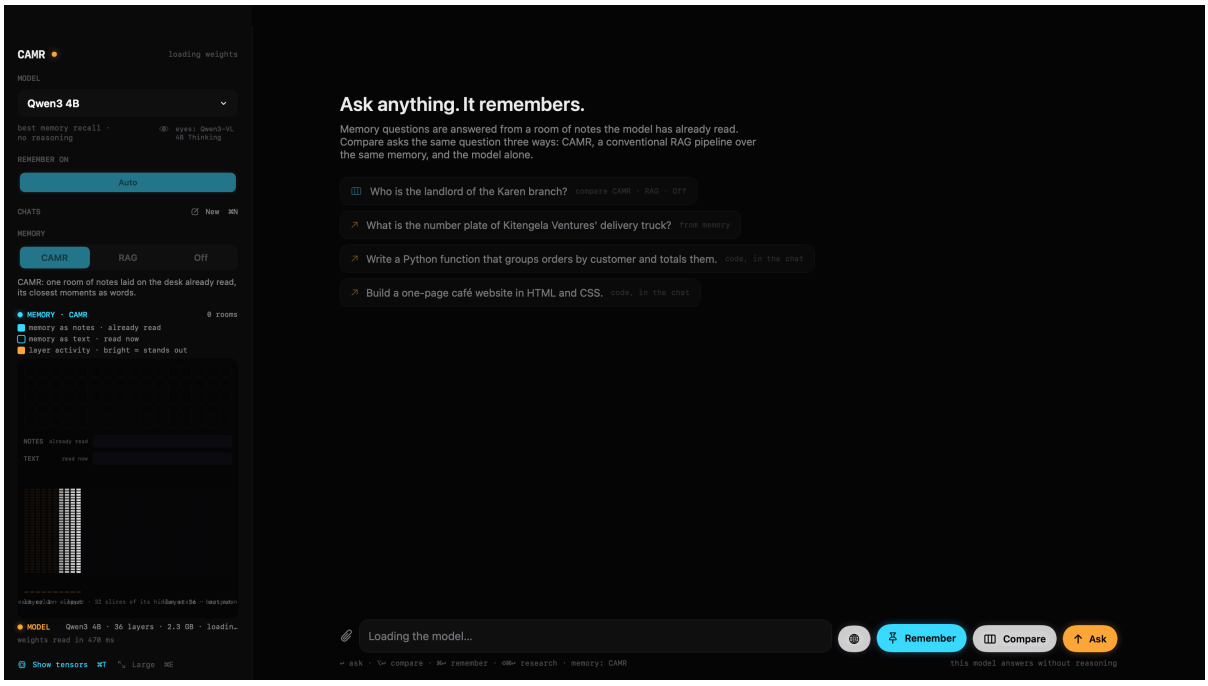


Figure 5.1: Starting the app: the model's layers fill in the tensor panel as their weights arrive ("loading weights"), while Chat offers questions to start with

Telling and asking. The user tells the model something with Remember and asks with Ask (Figure 5.2). A remembered moment is judged by revision, filed on its shelf and read once by the model; a question is routed, its room is read, and the answer is written. Under each answer the app shows where it came from (memory, the model's own knowledge or the web), the time to the first word, the text read, and, from memory, the note read and whether it came from RAM or the SSD. With memory off, the same question gets "I don't know" about the user's own facts. Moments told on "Auto" are filed by meaning, though not always on the shelf a person would choose (Figure 5.3).

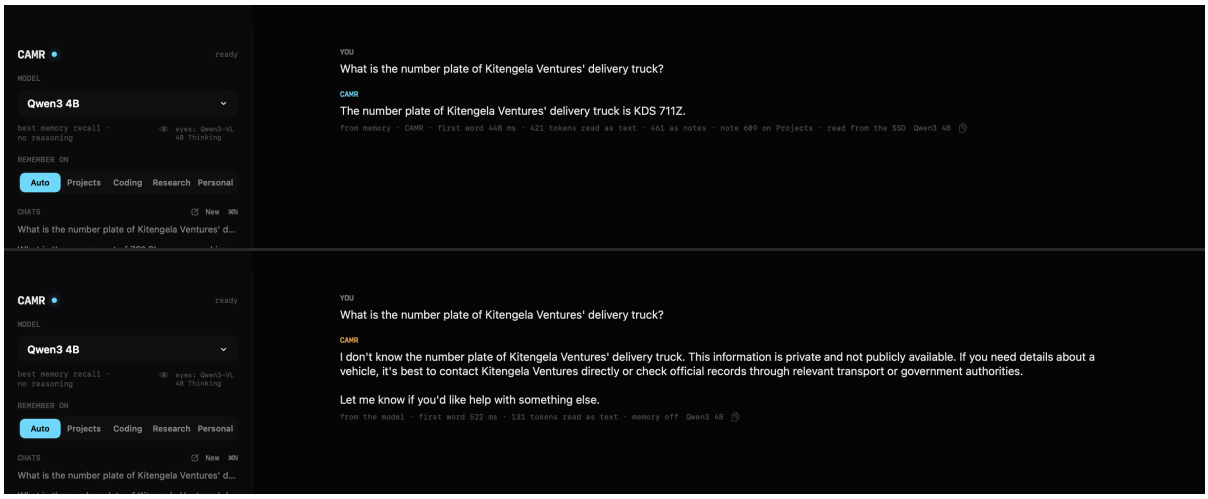


Figure 5.2: Chat with memory on (top) and off (bottom), each in a new conversation: with memory, a fact from the Long Haul is answered from note 609 on the Projects shelf, read from the SSD; with memory off, the model alone does not know it

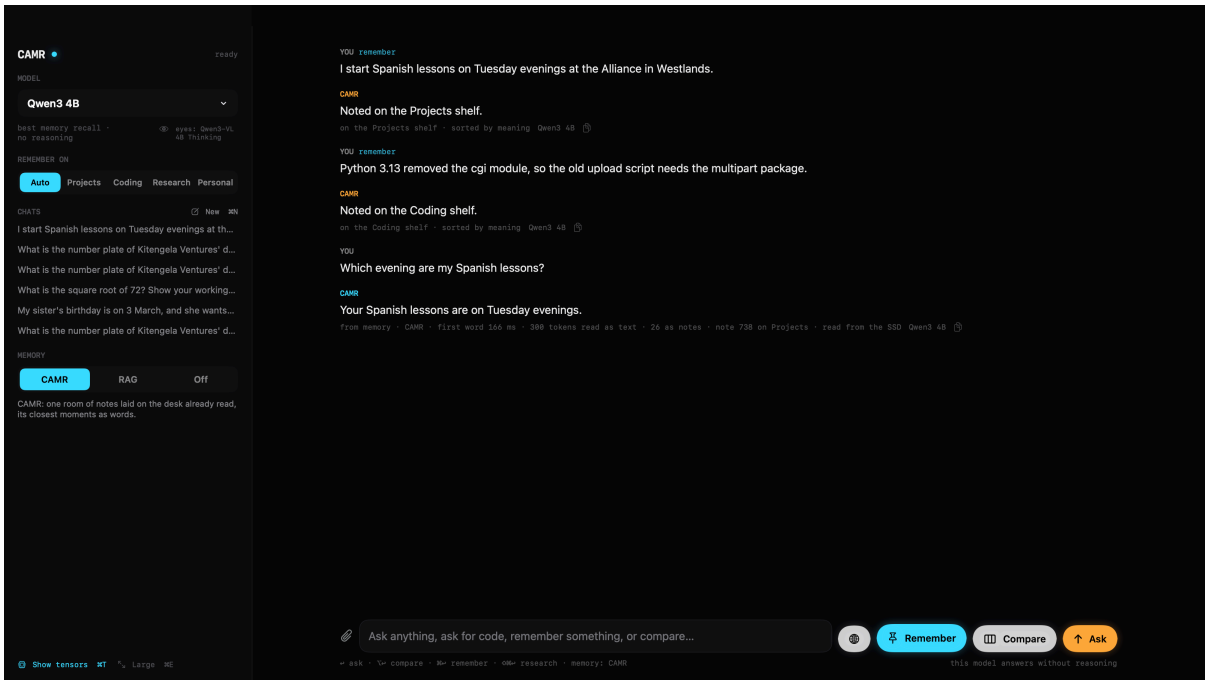


Figure 5.3: Shelves on "Auto" (Qwen3 4B): a note about Python is filed on the Coding shelf by meaning, while a personal moment about Spanish lessons falls to Projects; the answer names the note and shelf it read

CAMR, RAG or off, and Compare. A switch chooses how memory is used: CAMR (one room laid on the desk already read, and its closest moments as words), RAG (the eight closest moments pasted in as text and read again for this question, up to 1,024 tokens) or off. Compare asks the question all three ways, with the same model, the same memory and the same instructions and without the conversation, and sets the answers side by side with what each had to read (Figure 5.4). Compare answers are never kept in memory.

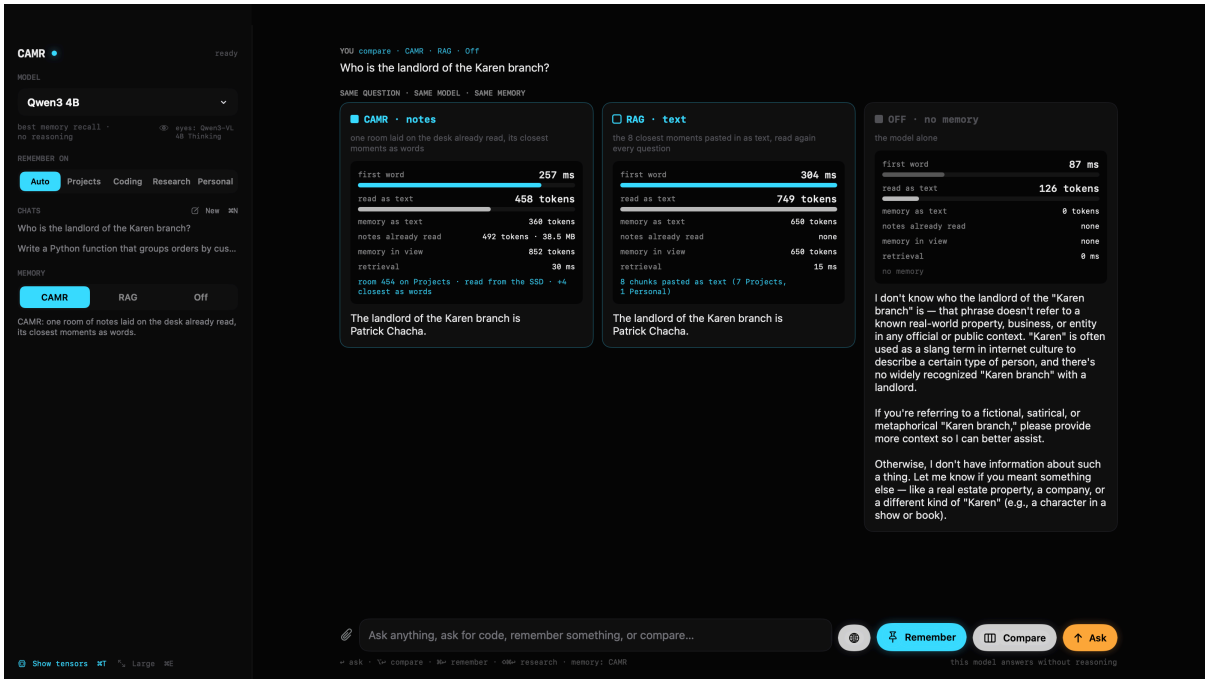


Figure 5.4: Compare on Qwen3 4B: CAMR and RAG both answer "Patrick Chacha"; CAMR's first word comes at 257 ms with 458 tokens read as text and 492 tokens already read as notes (room 454), RAG's at 304 ms with 749 tokens read as text, and with no memory the model does not know

Code in Chat. A request for code is answered from the model's own knowledge with room for a full file, and code is shown in formatted blocks with its language, its length and a Copy button (Figures 5.5 and 5.6).

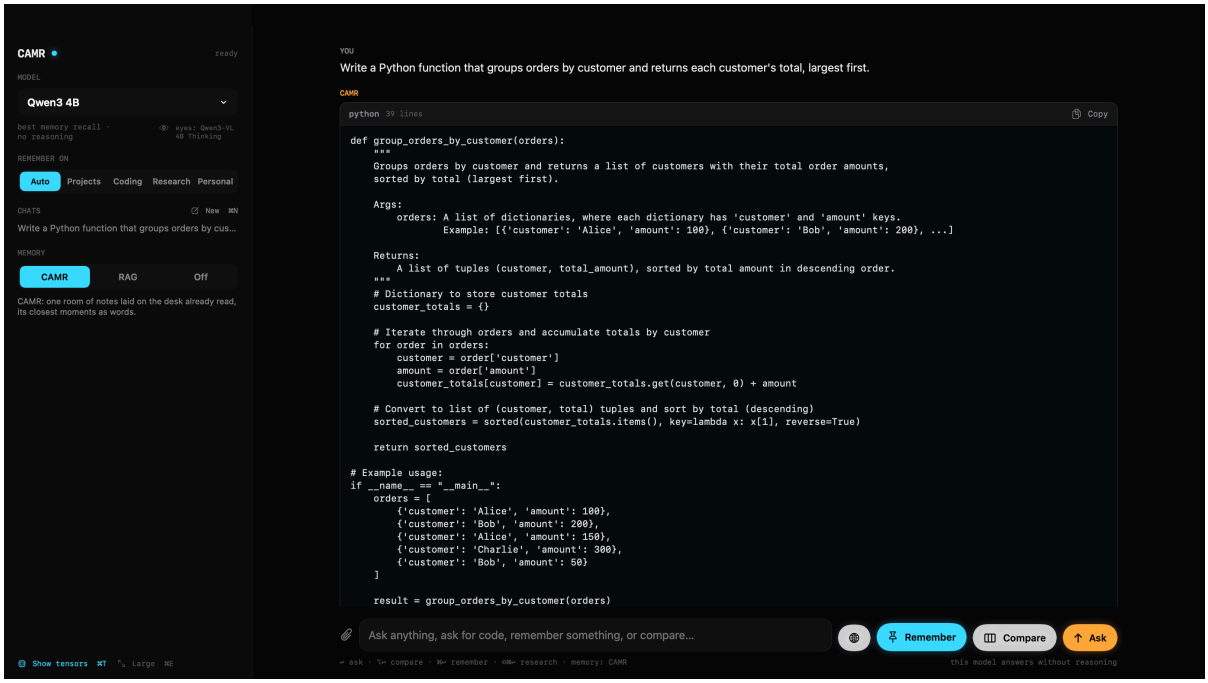


Figure 5.5: Code in Chat: a Python function written by Qwen3 4B, shown as a formatted block with its language, 39 lines and a Copy button

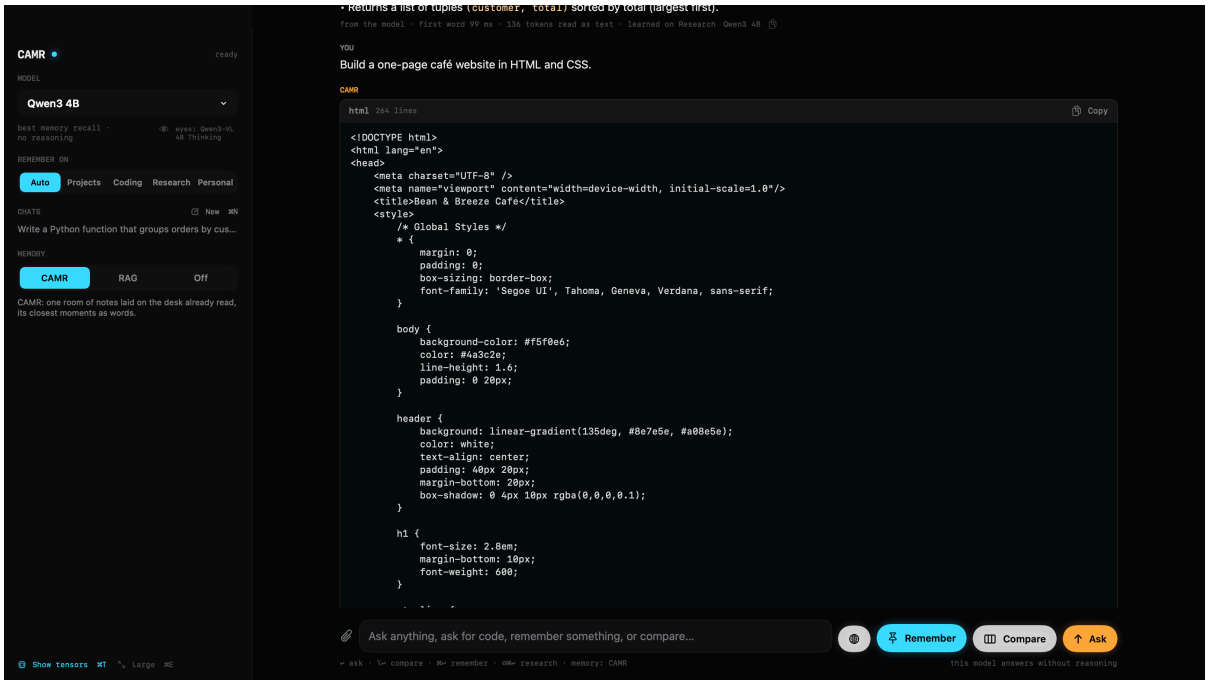


Figure 5.6: A one-page café website requested in Chat, returned as an HTML file in a code block

General questions and reasoning. A question that needs no memory is answered from the model's own knowledge; a thinking model's reasoning streams into a block that folds once the answer is written (Figures 5.7 and 5.8), and what was learnt is kept on the Research shelf. Conversations are saved and listed, and an answer can be stopped mid-way.

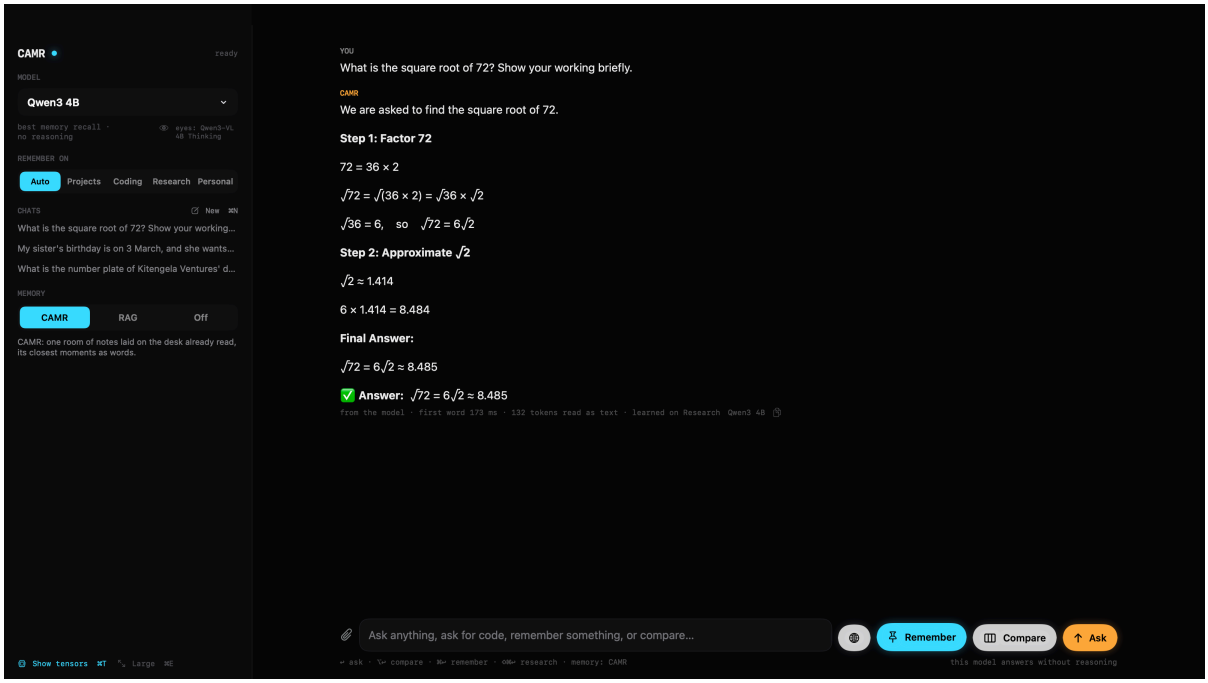


Figure 5.7: A general question answered by the 4B from its own knowledge, with its working, labelled "from the model" and learned on the Research shelf

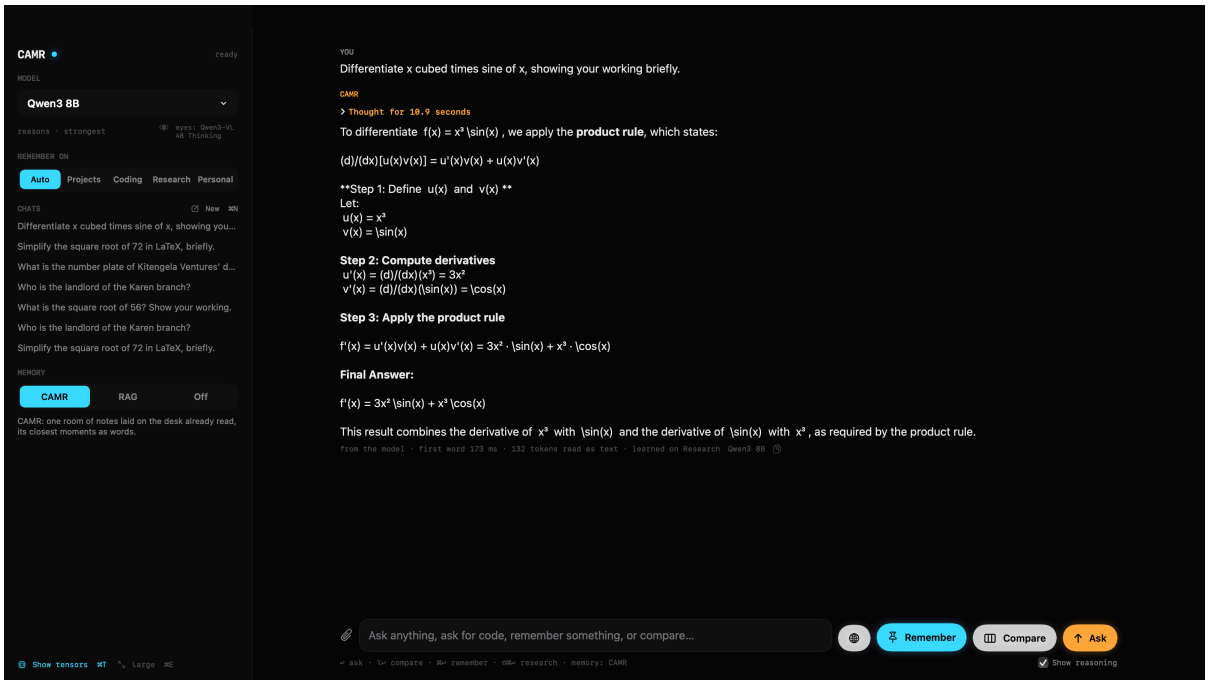


Figure 5.8: The 8B's reasoning, folded once the answer is written ("Thought for 10.9 seconds"); some of its LaTeX is shown as written rather than typeset

The tensors. The weights view is drawn only while a model loads or when the user asks for it (Command-T), and can be shown large beside the chat (Command-E). It draws only what the engine measures (FR-19): the shelves and their rooms on top, with the room read marked by its id and tier; a strip that sets the memory already read as notes against the text read now; and the model's 36 layers

below, each column a layer and each row one of 32 slices of its hidden state, lit where a slice stands out for the word being written. In CAMR mode the room flows from the memory into every layer, and only the closest moments, the date and the question are read as text (Figure 5.9). In RAG mode the chunks drop in as text and must be read from the first layer up before the first word (Figure 5.10). With memory off, the memory stays dark.

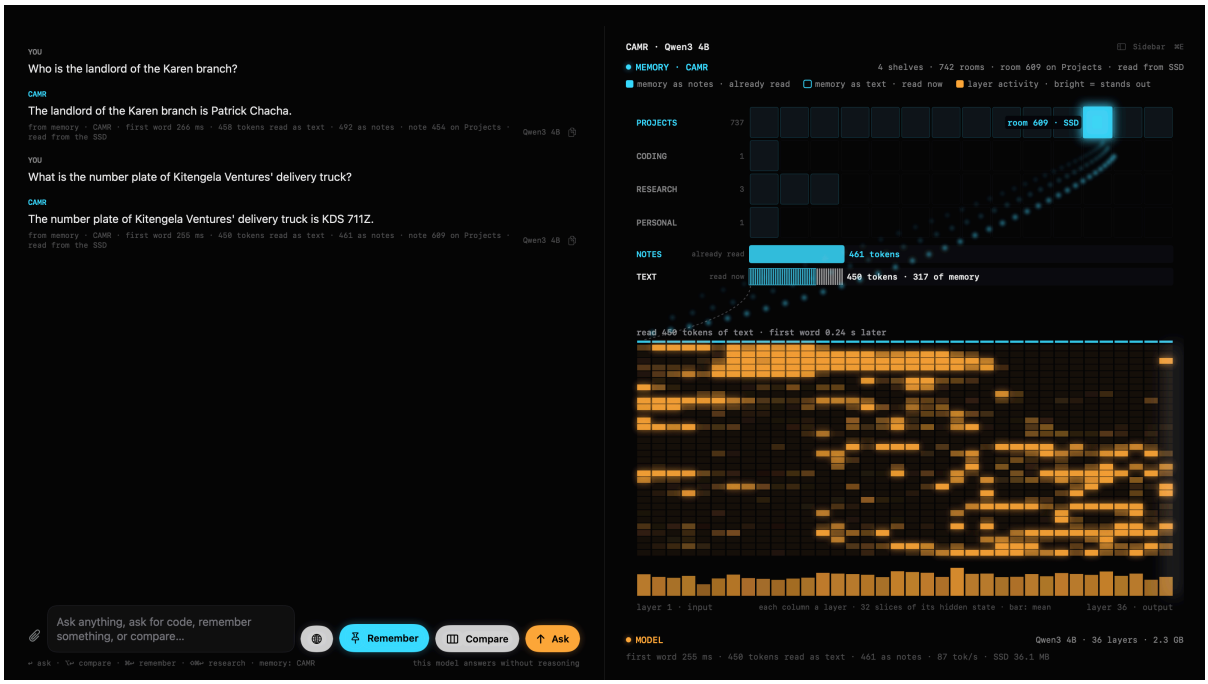


Figure 5.9: The tensors in CAMR mode: room 609 is read from the SSD and flows into the model's 36 layers; 461 tokens are already read as notes and 458 are read as text, and the first word comes 0.24 s later

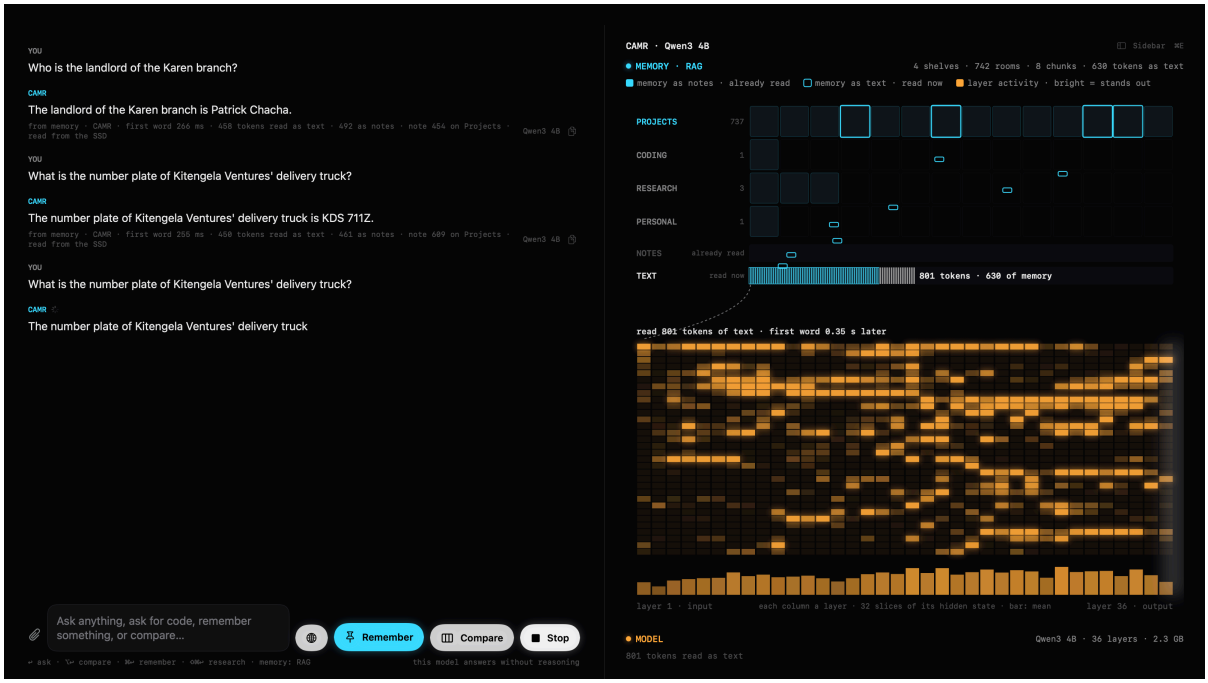


Figure 5.10: The tensors in RAG mode on the same question: eight chunks from the shelves are pasted in as text, so 801 tokens must be read before the first word, which comes 0.35 s later

5.4.7 **Memory for Other Runtimes: the Ollama Pairing**

Ollama runs its own model and lets no outside code put keys and values into it, so the engine gives it memory as words. A proxy on 127.0.0.1:11435 speaks Ollama's own API; before a chat is forwarded to the real Ollama, the proxy recalls the closest notes on the last user message and puts them, at most 8 notes and 512 tokens, at the front of that message (E-33). After the answer has streamed back, the exchange is remembered on a background worker. The same code serves an OpenAI-compatible endpoint on 127.0.0.1:11436 in front of Ollama, LM Studio or mlx_lm.server (E-47). Through these doors memory goes in as words; the engine's notes need the engine.

5.4.8 **The Benchmark Harness and the Contenders**

The harness drives every contender through the same protocol: it is told the history one event at a time (`tell(text, day)`) and asked each question (`ask(question, max_tokens, family)`). Table 5.8 names the contenders as the records do.

Table 5.8: Contenders on the Long Haul

Name	**What it is**
`engine:qwen3-1.7b`, `engine:qwen3-4b`, `engine:qwen3-8b`	CAMR: one project reach's memory with the vault, the core, the tiers and the metrics on, driven as a `Session` drives it; `+own` gives the 1.7B the engine's own instructions
`words:qwen-27b`	CAMR's rooms, chosen the same way, pasted in as text, for the 27B model
`bare:<model>`	No memory: the newest part of the history that fits (32K tokens for the 1.7B and 8B, 64K for the 4B), so that its keys and values fit in 24 GB
`ollama:qwen3:1.7b`; `ollama-bare:qwen3:1.7b`	Ollama through the pairing (memory as words); plain Ollama with the newest 32,768 tokens
`claude-haiku-5-5`, `claude-sonnet-5-5`, `claude-opus-5-5`	Claude alone: the newest part of the history that fits its one-million-token window, with room for the questions and the reply

The yardstick runner sends a checkpoint's questions in one streamed request that asks for the answers as JSON, with the history cached where the last request ended. A reply cut off by its own token limit is not graded wrong: the questions it never reached are asked again, alone, with twice the room. No fallback model is ever asked for, so each record names the model that answered. Before each call, its worst-case cost is held in a ledger, and the call is refused if it would pass the night's $60 cap less $2 of headroom.

5.5 **Testing**

> **In plain words.** Automated tests checked each part; benchmark runs checked the whole system against requirements written beforehand; and defects found by the measurements were fixed and the runs repeated. Two requirements were not met and are kept as written.

5.5.1 **Test Strategy and Acceptance Criteria**

The purpose of testing was to show whether the implemented system satisfies the requirements of Chapter 4. The scope was the engine, the assistant, the application, the pairing and the benchmark harness; the environment was the MacBook Pro of Table 5.1; the test data were the scripted lives, the Long Haul, the public suites and the multimodal files, none of them personal. A test passed only when its observed result met an expected result written beforehand: for the non-functional requirements, the thresholds of Table 4.3, written before the runs that tested them (E-19, E-40); for the functional requirements, the behaviour the requirement states. Testing was complete when every automated test passed, every requirement with a threshold had been measured, and every defect found had been fixed and retested or bounded and reported. Testing used five levels:

i. **Unit and integration tests.** White-box pytest tests in 49 files cover the rooms, notes, tiers, vault, core, reach, metrics, events, pairing, the app's routes and security, the Code agent, the assistant's router, research, revision and shelves, and every part of the benchmark harness (the Long Haul's generator and grader, the runners, the suites and the cost ledger). On 5 November, 803 tests passed and 5 were skipped.

ii. **System tests.** The benchmark runs were judged against the non-functional requirements of Table 4.3, whose thresholds were written before the runs that tested them (E-19, E-40).

iii. **Security tests.** Requests with a foreign host, a foreign origin, no token or a non-JSON body were sent to the engine's server and the proxies.

iv. **Deployment test.** The installer and the health check were run, and the Mac app was built, installed in the Applications folder and run with the 1.7B, 4B and 8B models.

v. **Demonstration.** Chat, Compare and the tensors were used with a real memory, and the screens were captured from the running app (Section 5.4.6). Black-box positive, negative and boundary cases were included: memory off, never-told questions, foreign requests, a second process, a cost cap, and a never-said name.

User acceptance testing and an accessibility audit were not done.

5.5.2 **Test Cases and Results**

Table 5.9 gives each test case with its requirement, its expected and actual result and its verdict.

Table 5.9: Test cases and results

Test ID	Traceability	Scenario	Expected result	Actual result and evidence	Verdict
T-01	All FR	The automated suite	Every test passes	803 passed, 5 skipped (5 November)	Pass

T-02	NFR-01	Speed bench, 2,000 words in the room, cache bypassed, five tries	Median first word under 0.5 s	0.233 s (E-20)	Pass
T-03	NFR-02	The same bench, notes against words	At least 10 times sooner	4.6 times (E-20)	Fail (kept)
T-04	NFR-03	The 1.7B told the whole Long Haul, measured at 1K, 10K and 17.7K moments	First word and RAM do not climb	First word 0.11, 0.15, 0.08 s; RAM 4.26, 4.28, 4.23 GB (E-38)	Pass
T-05	NFR-04	The same run	Disk within 40 GB; hot rooms within 2 GB	Disk 40.0–40.1 GB, held by sleep; hot rooms 1.95–1.99 GB	Pass
T-06	NFR-05	The 4B at 3M, with and without the 1 GB cap	Footprint falls; answers unchanged	19.2 → 7.5 GB; identical verdicts (E-41)	Pass after fix (D-02)
T-07	NFR-06	The 4B at 3M	Retrieval at most 10% of answer time	Retrieval p50 16 ms of a 0.39 s median answer (4%)	Pass for the 4B
T-08	NFR-07	Proof lives, week 12: notes against the same desk as words	≥ 95% of the facts; ≤ 3 extra false memories	164 against 163 facts; 25 against 24 false memories (E-20)	Pass
T-09	NFR-08	Never-said questions at every cut	A decline is graded right, a guess false memory	Graded as specified (grading tests); the 4B declined 9 of 10 at 2M and 10 of 10 at 3M and 4M	Pass
T-10	NFR-09	The 4B's 3M checkpoint run twice	Identical verdicts	29 of 73 both times, every verdict the same (E-41)	Pass
T-11	NFR-11	Negative requests to the server and proxies	Only the app's own requests are served	The app's 12 security tests and the pairing's 35 tests, which include its security checks, pass	Pass
T-12	NFR-12	A second process opens a reach folder	Refused	Refused with `ReachBusy` (reach tests)	Pass
T-13	NFR-14	The night's yardstick runs	Spend under $60	$28.71, every call in the ledger	Pass
T-14	NFR-15	Inspection of the records of 4 November	Machine, load, versions, commit and code hash in each	Present in every record	Pass
T-15	FR-18, FR-19	The Mac app with Qwen3 4B and 8B	Chat works with memory on and off and returns code as formatted blocks; the weights view moves only with measured events	Figures 5.1 to 5.10	Pass (demonstration)

T-16	FR-20	A fact told through the OpenAI-compatible endpoint, asked back through the real Ollama	The fact comes back	"Pilipili", with 187 characters of notes (E-47)	Pass
T-17	FR-22	The Long Haul built twice from seed 1, and extended	Identical scripts; the first 110 days unchanged by the extension	Generator tests pass; checked event for event (E-39)	Pass
T-18	FR-27	14 routing questions on the 8B's Long Haul memory, including one never-said name	Questions about the user's records go to memory; others to the model	13 of 14 routed right; the miss, the never-said name, was then answered honestly (E-55)	Pass
T-19	FR-30	Five test moments judged on the 4B: two updates, a repeat and two new facts	UPDATE, UPDATE, SAME, NEW, NEW	5 of 5 as expected; the old notes kept and marked superseded (E-56)	Pass
T-20	FR-31	Twelve test sentences told on "Auto"	Each filed on its shelf	12 of 12, including the 8 not close to any shelf's examples (E-51)	Pass
T-21	FR-29	A photographed receipt attached, then asked about later	Its total and an item answered from memory	KES 730.00 and the item, "from memory · note 549" (Figure 5.18)	Pass (demonstration)
T-22	FR-28	A web page whose text tries to close its markers or give orders	The page is read as data only	Angle brackets neutralised and links limited to http(s), by the research tests	Pass
T-23	FR-32	Compare on two Long Haul facts (the Karen landlord; Kitengela Ventures' truck plate), Qwen3 4B	CAMR and RAG give the told answer; off does not know; every figure shown is measured	Both answered by CAMR and RAG; CAMR's first word 257 and 230 ms against RAG's 304 and 308 ms, with 458 and 421 tokens read as text against 749 and 734; off declined (Figure 5.4)	Pass (demonstration)
T-24	Users	User acceptance; accessibility audit	Agreed criteria with representative users	Not run	Not tested

5.5.3 **Defects Found and Retests**

The measurements and the demonstrations found eleven defects in the system or in its measurement (Table 5.10). Each was fixed or bounded, and the affected runs were repeated or reported both ways.

Table 5.10: Defects found and retests

ID	**Defect and how it was found**	**Correction**	**Retest**
D-01	The 1.7B declined facts sitting on its desk at 1M and 2M; diagnosis ruled out retrieval and sleep and found the yardstick's wording (E-37)	The 1.7B is run with both wordings; the others keep the yardstick's, as planned	Both reported (Section 5.8.5)

D-02	The engine's process held 19.2 GB, not the 5.7 GB the records showed: MLX kept freed graphics buffers up to the whole limit and swap filled (E-40)	The buffer cache capped at 1 GB; every record now logs the process's footprint	7.5 GB, identical answers (E-41)
D-03	Ollama, bare, BABILong: 58 of 100 answers thrown out as "thinking" with no thinking in them (E-43)	An empty think block is cut off the answer; real thinking is still an error	The 58 resumed (Section 5.8.16)
D-04	Ollama, HARP: at the shared 400-token limit, 82 of the bare 1.7B's 120 answers and 95 of the paired one's were cut off mid-working (E-43)	The same room to work in words as Claude has to think (8,192 tokens); the 400-token records kept	Rerun (Section 5.8.16)
D-05	Ollama's `qwen3:4b` had become the Thinking build (E-33)	The 4B runs as `qwen3:4b-instruct-2507-q4_K_M`	Pass
D-06	A crash between appending a moment's notes and saving the index would misplace later moments (E-27)	Opening a memory cuts each room file to its indexed length; a test covers it	Pass
D-07	Routing blind, the 8B sent "the number plate of Kitengela Ventures' delivery truck" to its own knowledge (E-55)	The router sees the closest note; a question naming a person or business in the closest notes goes to memory	13 of 14 (T-18)
D-08	A photographed receipt was not recalled: 737 Long Haul notes outscored it on its own shelf (0.81 against 0.70)	The closest moment of every other shelf within 0.12 of the best is read too	Recalled (T-21)
D-09	Switching models in the app marked the new engine failed ("exit 15"): the old process's exit handler ran late	The handler acts only for the process it was attached to	Pass: 1.7B, 4B and 8B switched in turn
D-10	"Python", "HTML" and "CSS" in a coding request were taken for names in the closest notes, so the request went to memory	Common technical words are not counted as names	A Python request answered in full (Figure 5.5)
D-11	A force-quit app left its engine running and holding the memory's locks, so the next launch could not open the memory ("ReachBusy")	The engine stops serving and closes its memory when the app that started it is gone	Pass: the app killed outright, no engine left behind

5.6 **Version Control and Implementation Evidence**

Project repository: https://github.com/Satasdin/CAMR (public). The repository holds the baseline at its root and the engine in `v2/`, with their full histories; the final engine, the Mac app, its records and this report are on the branch `camr-build`. It contains the README, the user guide and the decision log; the installer, the scripts and the tests; every benchmark record and the Claude cost ledger; the Mac app's Swift package; and the generator scripts of this report's diagrams and charts. `.gitignore` excludes the virtual environment, model weights, datasets and `work/`, where contenders' memories are rebuilt on every run; no key, token or personal memory is committed, and the yardstick's key is read at run time from a private file outside the repository. The branch-based workflow kept the engine's development apart from the baseline: each increment of Section 3.3 was committed as it was

measured, and each benchmark job committed its records as it finished, so the history shows when each number was made and by which code. GitHub Actions runs the tests that need no MLX on every push (NFR-16).

5.7 **Author Oversight and Use of AI-Assisted Tools**

Three AI tools were used in this project, each in a defined role.

- **Kimi K3 (Moonshot AI), through the Moonshot API.** In the baseline stage, Kimi K3 served as the cloud reference model in the benchmarks: the closed-book ceiling against which CAMR v1 was measured on PopQA, HotpotQA, 2WikiMultiHopQA and GSM8K, and the model to which hard questions were escalated. Its answers are results, not authorship.
- **Claude Haiku, Sonnet and Opus 5.5 (Anthropic), through the Claude API.** In the final stage, these models served only as the yardstick in the benchmarks: they answered the Long Haul and the public suites alone, with no memory, every call logged with its tokens and cost and held under a $60 cap.
- **Claude Code (Anthropic), with Claude Opus models (Opus 5.5 in the final weeks).** Claude Code assisted with refining the project's goal into a measurable engine study, with designing and building the engine, the benchmark harness and the native Mac application, with running the benchmarks and analysing their records, and with drafting the documentation, including the decision log, the user guide, the generator scripts of the diagrams and charts, and drafts of this report.

The student set the problem, the objectives, the scope and the direction of the work, and made the decisions recorded as the student's own, such as making the engine the project (E-29), pushing the Long Haul past 2 million tokens (E-39), asking for the RAM to be optimised (E-40), removing Swarm from the app (E-50) and showing memory through Chat against RAG. Every output was checked: code by the automated tests (803 passing), every number by the dated records that name the machine and the code behind it, and the text against those records. Requirements were written before the runs that tested them, and requirements that were not met are reported as measured; no result, record or screenshot was fabricated. The decision log and the repository's commit history serve as the AI-use log. Material AI use is disclosed here, and the student made the final decisions and takes full responsibility for the submitted work.

5.8 **Evaluation Results**

> **In plain words.** A 4B model with CAMR answers a long project's questions about as well as Claude Sonnet alone at 2 million tokens, and better past Claude's window, at a fraction of the wait and in a process of 5 to 8 GB. It stays as fast as memory grows. It is weakest at joining facts and at following a design over weeks.

This section presents the measured results experiment by experiment, each with its conditions, its baseline and its interpretation. Section 5.9 then discusses them by objective.

5.8.1 **The Long Haul: Right Answers as the History Grows**

> **In plain words.** Up to a million tokens Claude Sonnet sees most of the history and answers the most. At 2 million the 4B with CAMR is three answers behind it. Without memory, the same 4B falls to 11.

Table 5.11 gives every contender's right answers at every cut, with its median wait for the first word and its peak RAM, and Figure 5.11 plots them as shares, since the cuts ask different numbers of questions.

Table 5.11: Right answers on the Long Haul (questions asked: 34, 40, 69 and 73; 3M and 4M ask the 2M questions)

Contender	**64K**	**256K**	**1M**	**2M**	**3M**	**4M**	**First word p50**	**Process RAM**
CAMR, Qwen3 4B	**25**	**26**	**25**	**29**	**29**	**29**	0.21–0.31 s	7.5 GB (capped, at 3M)
Qwen3 4B alone (newest 64K)	18	14	20	11	12	13	0.32–0.38 s	15.2 GB
CAMR, Qwen3 8B	26	26	24	27			0.32–0.54 s	8.1–8.8 GB
Qwen3 8B alone (newest 32K)	15	11	15	11			0.22 s	13.6 GB
Qwen 27B, CAMR's memory as words	24	21	24	27			2.2–2.4 s	16–17 GB
CAMR, Qwen3 1.7B, its own wording	19	20	21	21			0.10–0.14 s	4.5 GB†
CAMR, Qwen3 1.7B, the yardstick's wording	14	20	17	15			0.10–0.14 s	4.5 GB†
Qwen3 1.7B alone (newest 32K)	8	13	14	7			0.13 s	7.5 GB†
Ollama 1.7B with the pairing (words)	16	17	16	16			0.38–0.40 s	3.3 GB†
Ollama 1.7B alone (newest 32K)	8	12	10	7				5.7 GB†
Claude Haiku 5.5 alone	22	21	17	10	10	10	2–43 s	
Claude Sonnet 5.5 alone	28	35	43	32	13	10	13–70 s	
Claude Opus 5.5 alone	24	33	42	31			19–105 s	

Process RAM is the process's physical footprint where it was recorded; the figures marked † are peaks measured before the buffer-cache cap (MLX's own peak for the engine, the peak resident memory for Ollama), not process footprints, and may understate the process (Section 5.8.9). The Claude rows have no RAM figure, since Claude runs in the cloud.

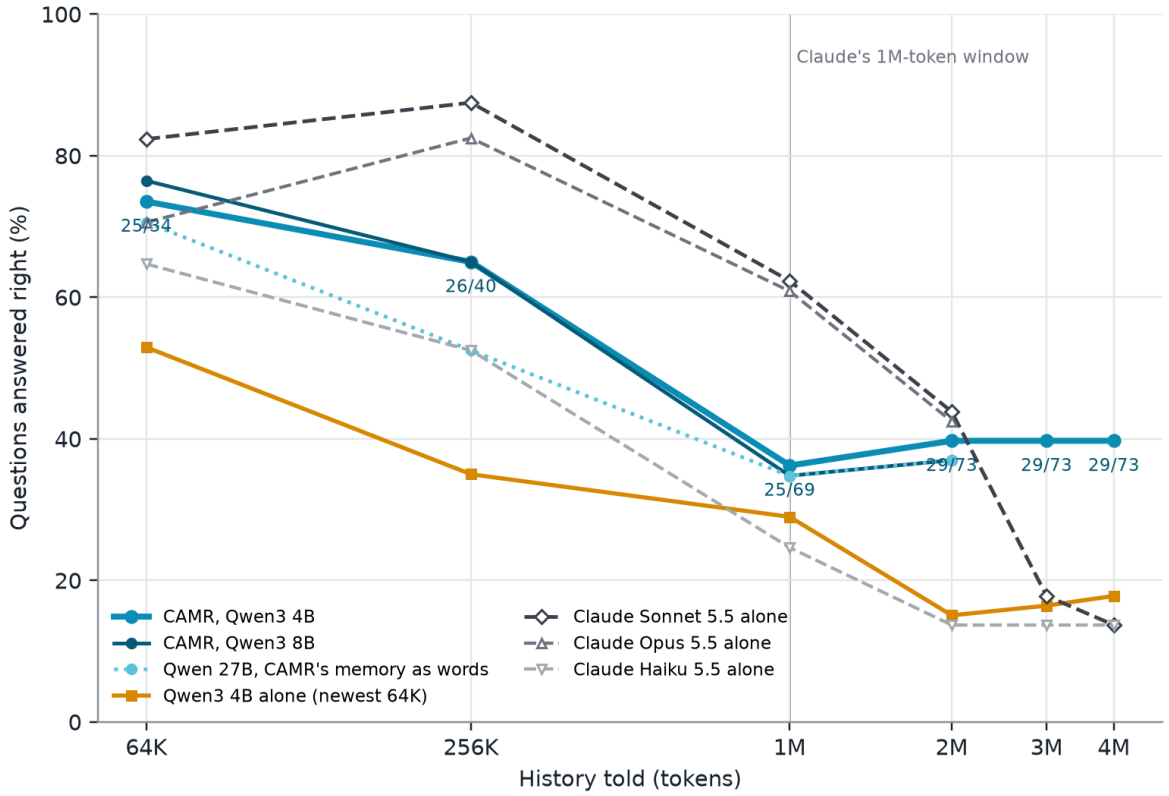


Figure 5.11: Share of questions answered right as the history grows. CAMR (cyan) holds its level past 1M tokens; the models alone (amber) and Claude alone (grey, dashed) fall once the history outgrows their windows

Four patterns stand out. First, memory roughly doubles what a local model answers once the history outgrows its window: at 2M, the 4B with CAMR answered 29 against 11 for the same model alone, and the 8B 27 against 11. Second, while most of the history fits in Claude's window, Sonnet and Opus answer more: up to 1M, Sonnet answered 28 to 43 and Opus 24 to 42, against CAMR's 25 to 26 at the same cuts, while Haiku (22, 21 and 17) trailed CAMR throughout. Already at 1M the history (counted with Claude's own tokenizer) no longer fitted whole, and Claude's request was cut from the front. Third, at 2M the gap between the 4B with CAMR and Sonnet alone is 3 answers of 73. Fourth, the larger readers did not do better with CAMR's memory than the 4B: the 8B answered 27 at 2M and the 27B, reading the memory as words, 27. On this test the memory, not the reader, sets the ceiling.

Where each answer's room came from matters for reading these results (Table 5.12). Up to 256K tokens almost every answer read its room as saved notes, from the SSD or from RAM. By 1M tokens the room files had reached their 40 GB disk budget, sleep had put most rooms away as words, and

most answers read their room as words: 47 of 69 at 1M, 68 of 73 at 2M, and 71 and 72 of 73 at 3M and 4M. The engine's results past 1M are therefore the results of its memory's organisation (rooms chosen by similarity, the closest moments, dates on every moment) read mostly as words, with the saved notes doing the work only for the rooms that were still awake.

Table 5.12: Where the 4B's room came from at each cut (`summary.all.tiers` and `status` in the records)

Cut	Notes from RAM	Notes from the SSD	Asleep: read as words	Rooms awake / asleep
64K	6	28	0	237 / 0
256K	1	34	5	676 / 61
1M	2	20	47	703 / 1,994
2M	3	2	68	807 / 4,932
3M	0	2	71	987 / 8,368
4M	0	1	72	1,152 / 12,669

5.8.2 **Past the Window: 3M and 4M**

> **In plain words.** Pushed to 3 and 4 million tokens, Claude can only see the last days, which have nothing planted, and it answers little beyond the questions about things never said. CAMR answers exactly as it did at 2 million.

At 3M and 4M the same 73 questions were asked under one and two million more tokens of noise (E-39). The 4B with CAMR answered 29 both times, as at 2M, and declined all 10 never-said questions, with a median first word of 0.31 s. Claude Sonnet answered 13 and then 10, and Haiku 10 and 10: their windows held only the newest days, so they declined almost every question, and what they scored was mostly the never-said questions, which a decline answers right (Sonnet also answered 3 corrected-maths questions at 3M). The 4B alone answered 12 and 13, from the newest 64K tokens. A memory that lives outside the window therefore keeps its answers however long the history grows, while a window, however large, forgets the beginning.

5.8.3 **What Was Answered: Knowledge Against Reasoning**

> **In plain words.** CAMR is best at facts told long ago and at code that must use the project's own helpers. It does not join two facts told weeks apart, and nobody built the page that needed a design from week 1 and a colour change from day 61.

Table 5.13 and Figure 5.12 break the 2M checkpoint down by family.

Table 5.13: Right answers at 2M by family (10 questions each; for "never said", declining is right)

Family	CAMR 4B	CAMR 1.7B (own wording)	Claude Haiku	Claude Sonnet	Claude Opus
Facts across the gap	**6**	**6**	0	4	4

Changed facts	3	2	0	5	5
Look-alikes	3	3	0	5	5
Corrected maths	4	4	0	6	6
Code that must fit	**4**	2	0	2	1
Two hops	0	1	0	0	0
Never said	9	3	10	10	10
The page that grows (3)	0	0	0	0	0

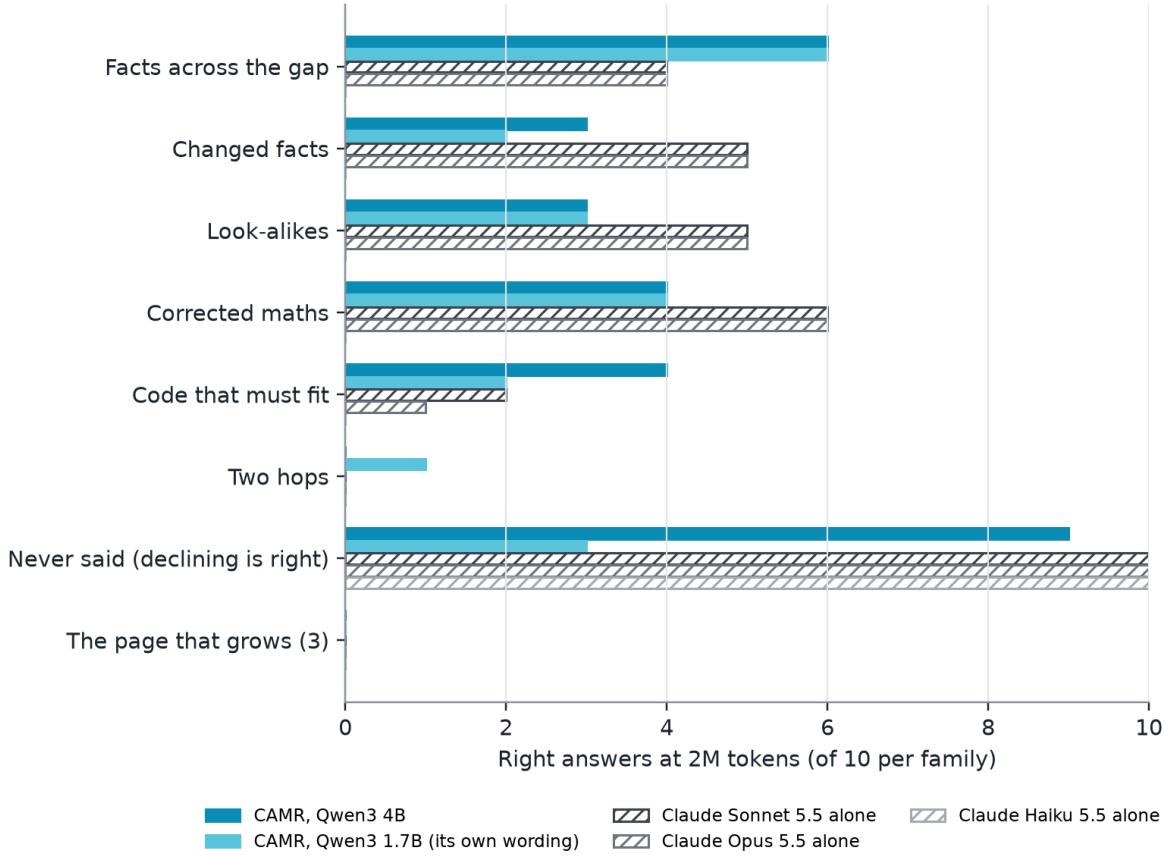


Figure 5.12: Right answers at 2M tokens by family: CAMR (cyan) against Claude alone (grey, hatched)

The pattern repeats the baseline's finding on public benchmarks (Section 5.8.18): memory recovers knowledge, not reasoning. CAMR led on facts planted far back (6 of 10 against Claude's 4), because Claude's window no longer held them, and on code that had to call the project's own helpers with their exact names and quirks (4 against 2). Claude led where the answer needs weighing several moments against each other: changed facts, where the newest of several values is right; look-alikes, where two near-identical names must be told apart; and corrected mathematics, where a correction must override a first answer. One room per question seldom holds every version of a changed fact, and a small reader takes the first it sees. Two hops were answered by nobody but once, by the 1.7B, and the

growing page was failed by every model, Claude included. It is the hardest probe: it needs the week-1 design system and the day-61 colour change together.

5.8.4 **Larger Readers: 8B and 27B**

The 8B with CAMR answered 26, 26, 24 and 27, level with the 4B, with a slower first word (0.32 to 0.54 s) and a larger process (8.1 to 8.8 GB). The 8B alone answered 15, 11, 15 and 11 from its newest 32K tokens, in a 13.6 GB process. The 27B cannot use saved notes, because 48 of its 64 layers keep a running state instead of keys and values (E-26); given the same rooms as words, it answered 24, 21, 24 and 27, at 2.2 to 2.4 s to the first word in a 16 to 17 GB process. A reader twice or about seven times the 4B's size, given the same memory, did not answer more. The memory sets the ceiling here, and the 4B is the best trade of answers against time and RAM on this Mac.

5.8.5 **The 1.7B: Its Wording, Not Its Memory**

> **In plain words.** The smallest model did badly at first. The cause was not its memory but the instructions: told to answer only from its notes and to say "I don't know" otherwise, it said "I don't know" even when the answer was in front of it.

With the yardstick's instructions, the 1.7B with CAMR scored on facts 2 of 10 at 64K, 5 at 256K, 1 at 1M and 0 at 2M; most of its total came from declining the never-said questions (E-37). Three checks on its own 2M memory found the cause (Table 5.14).

Table 5.14: Why the 1.7B missed facts at 2M (E-37)

Check	Finding	Conclusion
Was the right room chosen?	The room holding the planted fact was chosen for 6 of the 10 facts	Retrieval was not the cause
Did sleep lose it?	37 of 40 recall answers hit an asleep room; waking each room first gave 2 of 40 both ways	Sleep was not the cause
Was the fact on the desk?	Yes, sometimes twice (for example "Muthoni Wafula is working off a Lenovo Yoga 7"); the 1.7B still answered "I don't know", even with the same words as plain text in a fresh prompt	The wording was the cause

With the engine's own wording, written for the scripted lives before any Long Haul result, the same 1.7B answered 19, 20, 21 and 21 against 14, 20, 17 and 15, and 6 of 10 facts at 2M. It also invented more: it declined only 3 of the 10 never-said questions at 2M, against 7 with the yardstick's wording (and, on the same 2M desks read as words, 3 against 8; E-37). The 1.7B's honesty is a property of its wording, not of its memory. The 4B does not have this problem: it keeps the yardstick's wording and is both right and honest. No wording was picked after seeing it work on these questions; the 4B, 8B and 27B kept the yardstick's wording as planned.

5.8.6 **Notes Against Words: What the Tensors Buy**

The same 1.7B, with the same wording, can be given its memory two ways: as notes through the engine, or as words through Ollama and the pairing. As notes it answered 14, 20, 17 and 15; as words,

16, 17, 16 and 16. The first word came three times sooner as notes (0.10 to 0.14 s against 0.38 to 0.40 s), but the notes took 40 GB of disk against 0.1 GB for the pairing's words. On this test the tensors buy speed, not accuracy, though the comparison is clean only at 64K and 256K: at 1M and 2M most of the engine's rooms were asleep, and 41 and 69 of its answers read their room as words (Table 5.12). The rooms build had found the same within one room, where notes and words knew 164 and 163 facts (Section 5.8.17).

5.8.7 **The Claude Yardstick: Time and Cost**

Claude was only a yardstick: it answered the same questions alone, with no memory. Table 5.15 gives what it cost on the Long Haul.

Table 5.15: The Claude yardstick on the Long Haul (from the records)

Model	**Right, 64K–2M (of 216)**	**Right, 3M and 4M (of 146)**	**First token, per request**	**Cost on the Long Haul**
Claude Haiku 5.5	70	20	2.2–43.2 s	$1.13 + $0.97
Claude Sonnet 5.5	138	23	12.7–70.0 s	$4.92 + $3.87
Claude Opus 5.5	130	not run	19.3–105.2 s	$9.86

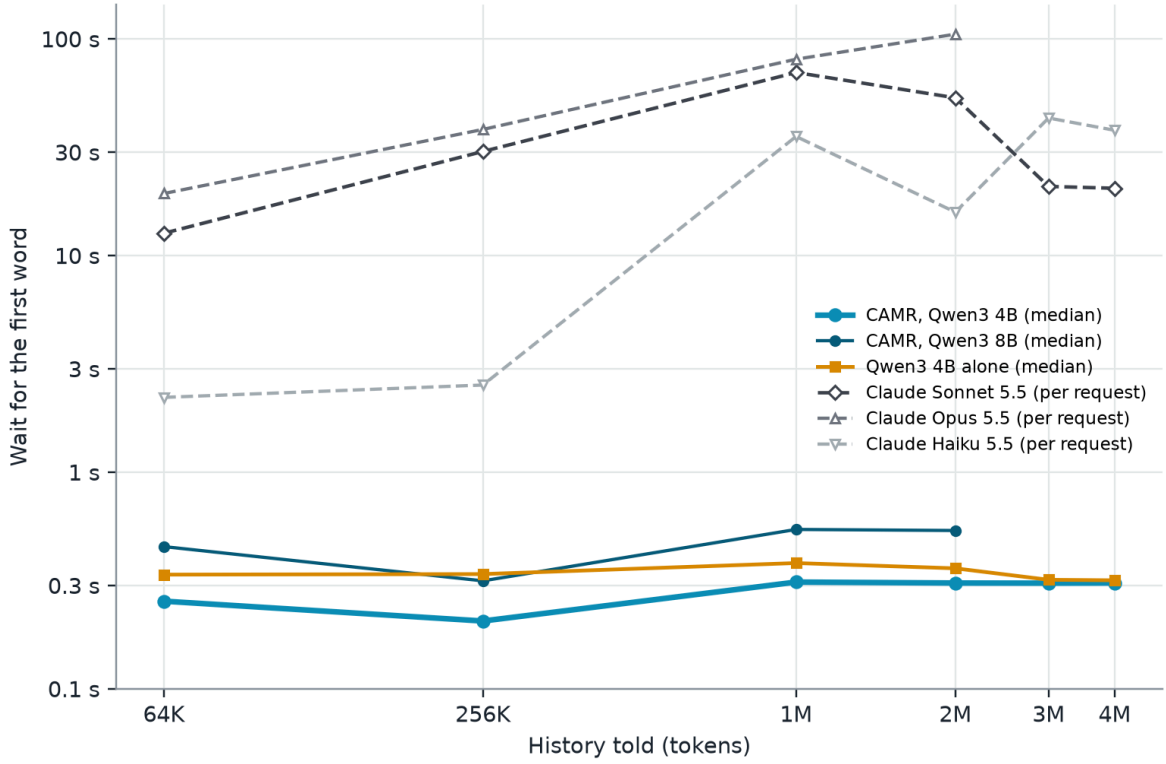


Figure 5.13: The wait for the first word as the history grows: CAMR's median (cyan) against the model alone (amber) and Claude's first token per request (grey, dashed); note the logarithmic scale

Figure 5.13 sets the waits side by side. For comparison, the 4B with CAMR answered 105 of the same 216 questions from 64K to 2M and 58 of 146 at 3M and 4M. Sonnet answered more within its

window, and less beyond it. Opus scored no better than Sonnet on the Long Haul (130 against 138) at twice the price, so it sat out the suites (E-36) and the longer cuts (E-39). Claude was honest: it never invented a never-said fact. Sonnet's and Opus's first token came after 13 s at 64K and up to 105 s at 2M, because each request reads up to a million tokens; the engine's first word came in under a third of a second. Spending for the night, suites included, was $28.71 of the $60 cap, every call logged.

5.8.8 **Speed as Memory Grows**

> **In plain words.** The wait for the first word did not grow as the memory grew eighteenfold. RAM stayed flat. Only the disk filled, and sleep held it at its budget.

The 1.7B was told the whole Long Haul and measured at 1,000, 10,000 and 17,676 moments, with 5 questions at each point (Table 5.16, Figure 5.14).

Table 5.16: The wait as memory grows (`engine:qwen3-1.7b`; E-38)

Moments kept	**History**	**First word, p50**	**Retrieval, p50**	**Peak RAM**	**Disk**	**Rooms awake / asleep**
1,000	112K tokens	0.11 s	24 ms	4.26 GB	14.9 GB	358 / 0
10,000	1.15M tokens	0.15 s	17 ms	4.28 GB	40.0 GB	864 / 2,146
17,676 (the end)	2.01M tokens	0.08 s	18 ms	4.23 GB	40.1 GB	920 / 4,471

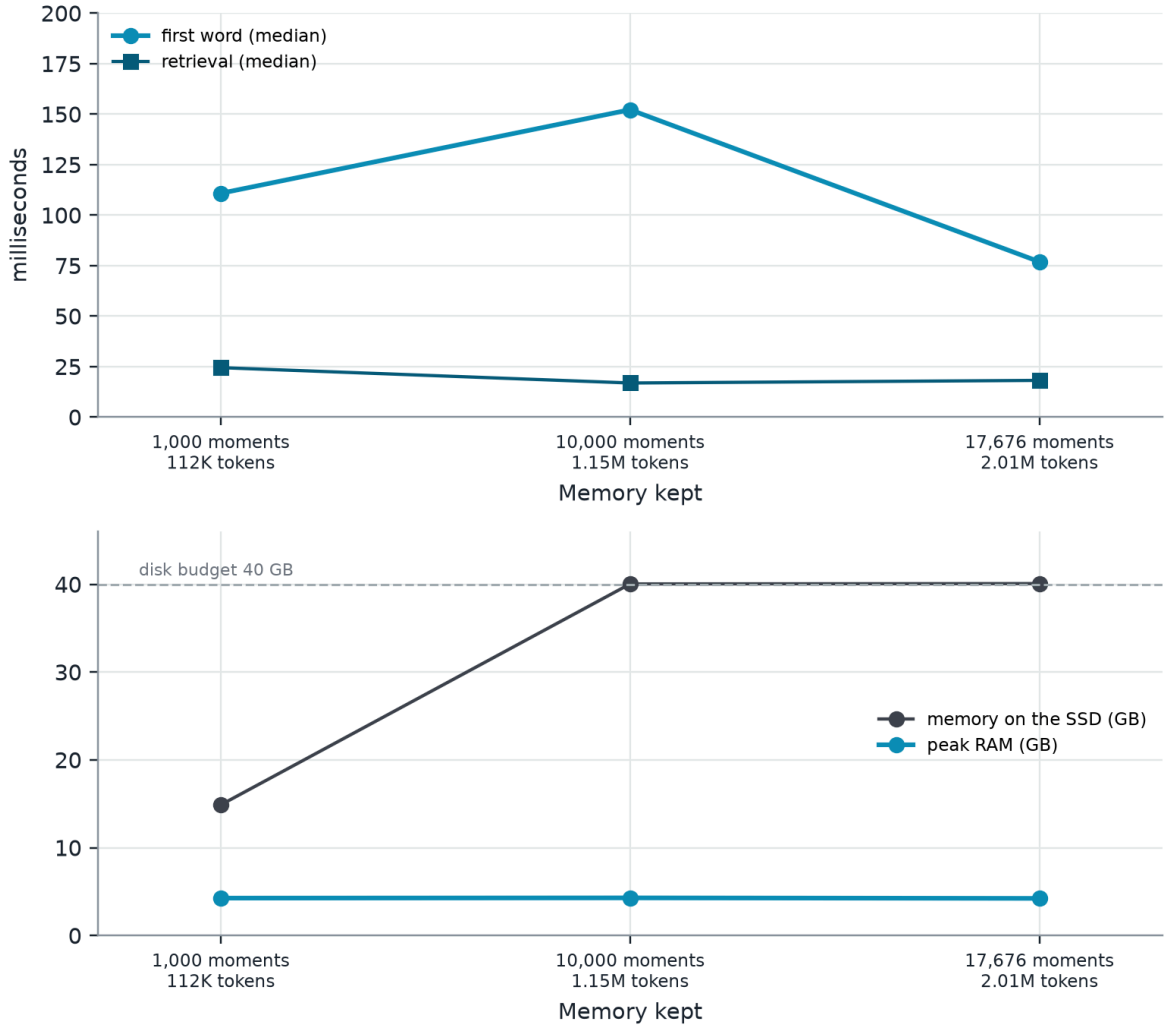


Figure 5.14: The wait, retrieval time, RAM and disk as the 1.7B's memory grows from 1,000 to 17,676 moments

The wait for the first word is the sum of the steps an answer takes before it writes (Equation 5.4); every record logs each term, so a slow answer can be traced to its step.

$$t_{first} = t_{choose} + t_{core} + t_{fetch} + t_{wake} + t_{desk} + t_{prefill} + t_{token} \tag{5.4}$$

The first five terms are the retrieval time of Table 4.9 (choosing the room, building the core, reading the room, waking it when asleep, laying the desk); $t_{prefill}$ is reading the closest moments, the date and the question as words, and t_{token} is writing the first token. When a room is read from the SSD, its read bandwidth is the bytes read over the fetch time (Equation 5.5).

$$\text{bandwidth} = \frac{\text{read bytes}}{t_{fetch}} \tag{5.5}$$

The first word stays at about 0.1 s because the desk is always one room of at most 512 tokens plus four moments, however large the memory grows. Retrieval, one product of the question with every moment's embedding and one read of a room, took 17 to 24 ms. Reading the history in took about

1,100 tokens a second throughout. The 90th-percentile first word (2 to 5 s) is a question whose room is asleep or whose answer is long, read as words. Rooms not hot were read off the SSD at 6 to 12 GB/s. At the 2M cut, Claude waited 16 to 105 s for its first token (Haiku 15.9 s, Sonnet 53.5 s, Opus 105.2 s).

5.8.9 **RAM: the Cap on the Buffer Cache**

> **In plain words.** The engine first seemed to use 5.7 GB. A closer look showed the whole process holding 19 GB, because the graphics library kept freed buffers. Capping that cache cut the process to 7.5 GB and made it almost twice as fast, with the same answers.

During the 4B's 4M-token run, the process's physical footprint (what Activity Monitor shows) was 19.2 GB, of which only 1.0 GB was resident; the rest sat compressed or in swap, which was full (8.8 of 9.2 GB). The records' "peak RAM" of 5.7 GB was MLX's peak of arrays in use during one answer, so it never saw this. The cause was MLX's cache of freed graphics buffers, which is unbounded up to the graphics limit (about 18 GB here), while a long ingest frees a desk's worth of buffers for every moment (E-40). The cache is now capped at 1 GB when a reader or embedder loads, which changes no computation, only how many freed buffers are kept for reuse. Table 5.17 and Figure 5.15 give the effect.

Table 5.17: The 4B at 3M, before and after the 1 GB cap (E-41)

Measure	**No cap**	**1 GB cap**
Right answers (of 73)	29	29, every verdict identical
Process footprint	19.2 GB	7.5 GB
Reading the 3M history	99.5 min (503 tokens/s)	53 min (938 tokens/s)
First word, p50	0.37 s	0.31 s
Retrieval, p50	20 ms	16 ms

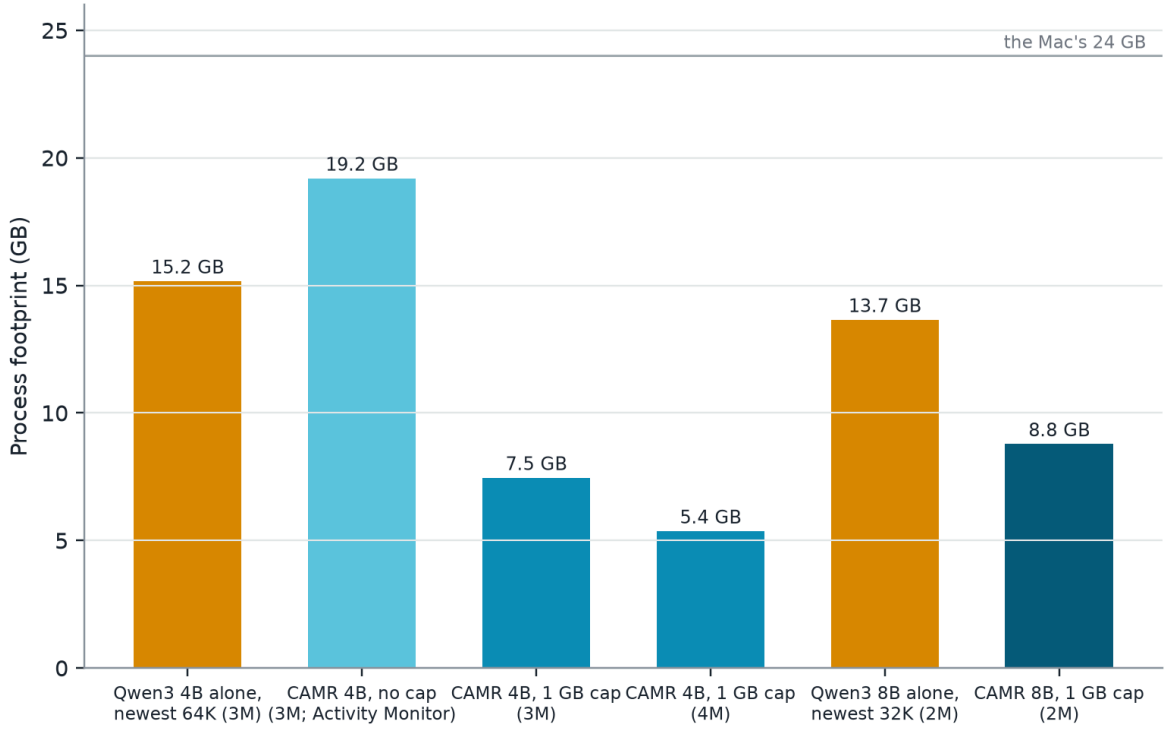


Figure 5.15: Process footprint: the models alone (amber) against CAMR (cyan), before and after the cap

The 7.5 GB is about what the parts add up to: the 4B's weights, the embedder, the 2 GB pool of hot rooms, the 1 GB cache and Python. At 4M the footprint was 5.4 GB. The 8B, the 27B and the Ollama suite runs were the first measured with the cap. Every run before them (the 1.7B and the 4B up to 2M) ran without it; their scores are unaffected, but their RAM figures are understated.

5.8.10 **Storage at 8 and 4 Bits**

The 1.7B with CAMR was rerun on the Long Haul's first two cuts with its rooms stored at 16, 8 and 4 bits (records of 5 November, `v2/records/bench/2026-11-05/`; Table 5.18). At 8 bits it answered as at 16 bits, 14 and 20, with the room files held to 8.6 GB at 256K by an 8 GB disk budget against 34.3 GB at 16 bits; at 4 bits it lost 2 answers at 256K (18 against 20) and took 9.7 GB.

Table 5.18: Room storage at 16, 8 and 4 bits (`engine:qwen3-1.7b`, the first two cuts)

Rooms stored at	Right, 64K (34)	Right, 256K (40)	Disk at 256K	First word p50, 256K	Process RAM, 256K
16 bits	14	20	34.3 GB	0.10 s	5.2 GB
8 bits (8 GB disk budget)	14	20	8.6 GB	0.13 s	3.8 GB
4 bits	14	18	9.7 GB	0.15 s	4.1 GB

5.8.11 **Which Reach Works Best**

> **In plain words.** Keeping one memory per project is best. A memory per conversation forgets everything said in other weeks, and mixing two projects in one memory sometimes takes the wrong

project's rule.

The 4B with CAMR heard the Long Haul's first 256K tokens four ways and was asked the same 40 questions; the other project was the Long Haul built from seed 2 (Table 5.19, Figure 5.16).

Table 5.19: Which reach works best (`engine:qwen3-4b`, 256K tokens, 40 questions; E-42)

Set-up	**Right (of 40)**	**Facts (of 10)**	**First word p50**	**Disk**
Session: each working week its own memory, asked in the last	11	0	0.24 s	44 GB
Project: every week into one project memory	**26**	**8**	0.19 s	44 GB
Global: both projects in one memory	24	8	0.19 s	85 GB
Project + global: both read, the closest room wins	24	7	0.19 s	85 GB

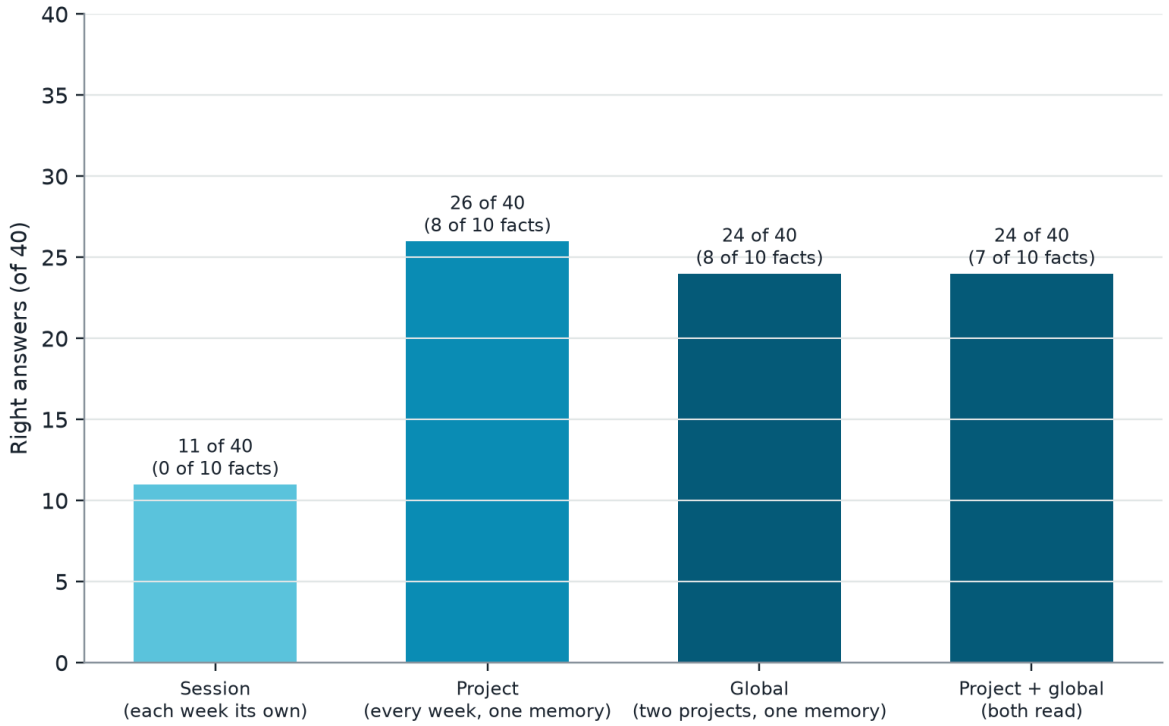


Figure 5.16: Right answers by reach

A session's memory holds only its own week, so 10 of its 11 right answers were never-said questions declined. In global memory, two mathematics answers went stale because they took the other project's look-alike rule. When both were read, the other project's room won 7 of the 40 questions and cost exactly 2 answers, a fact and a changed fact, which the 4B declined rather than answer with the other project's facts. Every set-up declined all 10 never-said questions. The app's default therefore stays project reach.

5.8.12 **Multimodal Memory**

The engine can also remember files (E-44). A PDF becomes one moment per page, an image its caption and the text written in it, and a video a frame every 2 s, each described with its time, by a vision model that turns the file into words once; the moments are then kept like any others, with the file copied into the vault. The multimodal benchmark tells 21 files of Mama Njeri's Kitchen (PDF invoices and menus, photographed receipts and notices, charts and short whiteboard videos) among about 100,000 tokens of the Long Haul's own events, all in the first 60,000 tokens, and then asks 37 questions graded by the Long Haul's rules: 29 about facts planted in the files, by kind of file, and 8 never-said questions where declining is right. The contenders are Qwen2.5-VL-3B with CAMR, alone with its newest 32K tokens, and with the file itself in the prompt as an upper bound; Qwen3 4B with CAMR and alone, reading the vision model's words; and Ollama's `qwen2.5vl:3b`, paired and bare.

Table 5.20 gives the results (VL-3B is Qwen2.5-VL-3B; 4B is Qwen3 4B; Gemma 3 is Ollama's `gemma3:4b`) for seed 1 by kind of file, with each contender's total on a second draw of files and questions (seed 2), from the records `*-media-*.json` of 4 November.

Table 5.20: Multimodal memory: right answers by kind of file (seed 1: 29 planted facts and 8 never-said questions; seed 2: the same counts)

Contender	PDF (8)	Image (9)	Chart (6)	Video (6)	Never (8)	Seed 1 (37)	Seed 2 (37)	First word	RAM
4B + CAMR (VL-3B's words)	**8**	**9**	**6**	**6**	**8**	**37**	**35**	0.34 s	7.3 GB
4B alone (newest 64K)	1	5	3	1	7	17	18	0.32 s	12.4 GB
VL-3B + CAMR	8	9	6	6	4	33	31	0.21 s	5.1 GB
VL-3B + CAMR, looking again	8	9	6	6	3	32		0.80 s	8.7 GB
VL-3B, file in the prompt	8	9	6	6	5	34	33	1.23 s	4.4 GB
VL-3B alone (newest 32K)	0	0	0	0	0	0	2	0.14 s	6.3 GB
Ollama VL-3B + pairing	8	9	6	6	5	34	33	0.22 s	1.9 GB†
Ollama VL-3B alone	0	0	0	0	5	5	2		1.9 GB†

Ollama Gemma 3 + pairing	8	7	6	5	2	28		0.36 s	1.9 GB†
Ollama Gemma 3 alone	0	0	0	1	4	5			1.9 GB†
4B + CAMR (Gemma's words)						36			

With CAMR, every planted fact from every kind of file was recalled on seed 1, at least 40,000 tokens after the file was told, by the vision model and by the text-only 4B: 29 of 29 each, and 27 to 28 of 29 on seed 2. The 4B with CAMR answered all 37 on seed 1 and 35 on seed 2, declining every never-said question, and beat the vision model holding the file in its prompt (34 and 33) at under a third of its wait. The models alone recalled almost nothing: by the questions, the files had left their windows. Ollama's vision model, given memory as words through the pairing, did as well as the engine's vision model (34 and 33), in the smallest process. A second vision model, Ollama's Gemma 3 4B, described the files itself and, through the pairing, recalled 26 of the 29 facts against 1 alone, but invented answers to 6 of the 8 never-said questions. Given Gemma's descriptions instead of Qwen2.5-VL's, the 4B with CAMR answered 36 of 37: the memory, not the describer, carried the answers. Figure 5.17 sets the totals side by side. Looking at the image again added nothing on this set and cost nearly four times the wait. The vision models' weakness was honesty, not recall: with memory they invented answers to 3 to 5 of the 8 never-said questions, where the 4B invented none. († Ollama's own peak resident memory, not a process footprint.)

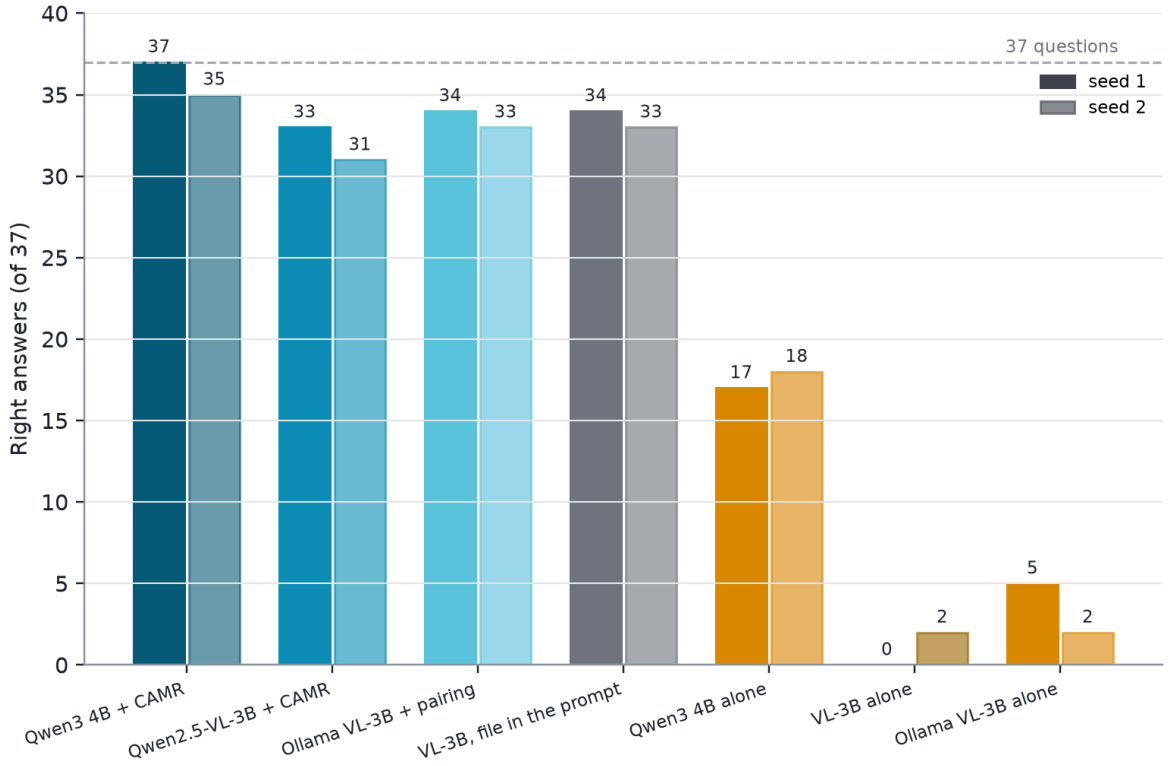


Figure 5.17: Multimodal memory: right answers of 37 on two draws of files, with CAMR (cyan), with the file in the prompt (grey) and alone (amber)

5.8.13 **Code: Café Websites from Memory**

The Code agent was benchmarked on building from what it was told (E-58). Memory is told six notes about a café: its name, two brand colours as hex, three menu items with prices in KES, its opening hours, its address, and the rule that prices always show KES and two decimals. The agent is then asked, in an empty workspace, for "a one-page website for our café: index.html and style.css". Ten rules grade each site with no model: both files exist, the HTML parses, it links `style.css`, and it holds the name, all three items, every price as "KES n.00", the opening and closing times, the address and both colours, with nothing invented (no price or menu word the notes do not hold). Shell commands are refused, since a site needs only file writes. Each model ran four ways on five cafés: memory off, the notes pasted into the prompt (the ceiling), memory with the notes on the Coding shelf the day before, and note context, with the notes told ten days earlier among 6,000 tokens of Long Haul events (Table 5.21).

Table 5.21: Code: café websites, average rules met per site (of 10) over five cafés (records `013817-code-cafe-code-qwen3-4b.json` and `014735-code-cafe-code-qwen3-8b.json`)

Model	Memory off	Notes in the prompt (ceiling)	Memory on	Notes told 10 days earlier among noise
Qwen3 4B	3.0	9.8	**10.0** (5 of 5 complete)	9.2
Qwen3 8B	4.0	10.0	9.6	9.2

With memory, the sites were as good as with the notes in the prompt. The 4B met every rule on every café from memory (10.0 against 9.8), in fewer steps (3.6 against 9.0) and about half the time (18.0 s against 36.0 s per site); the 8B met 9.6 against 10.0. With memory off the page worked but knew nothing: the 4B invented a menu every time (cappuccino, espresso, latte) and failed "nothing invented", while the 8B wrote a two-line welcome page with no menu. Told ten days back among other events, memory still found most of it, 9.2 on both models. The records show three kinds of miss: the price rule (three runs), whose note was on the desk though the model still wrote "KES 220"; one café's colours and address, which were in neither the room memory chose nor its closest words; and, for the 8B with memory on, one site with no stylesheet, after the model twice said it would write `style.css` and stopped.

5.8.14 **The Assistant and the Shelves in the App**

On twelve test sentences, "Auto" filed all 12 on the right shelf, including all 8 that were not close to any shelf's examples (E-51). In the app, three moments told on "Auto" went to the Coding, Research and Personal shelves, and each later answer read the right shelf, with its first word in 111 to 119 ms. The warm-up's kernels alone took 24 ms off the 4B's first answer, from 111 to 87 ms; a room not read ahead still came off the SSD in milliseconds, the first Long Haul question reading 68 MB in 8 ms (E-52).

The assistant's parts were checked in the app on the night of 4 November (E-55 to E-57). The router adds about 0.1 s to a question. Reading the closest moment of every other shelf when it is within 0.12 of the best found a photographed receipt that the 737 Long Haul notes had outscored (closeness 0.70 against 0.81). Revision judged five test moments on the 4B correctly, 5 of 5: a raised minimum order and new opening hours as updates, a repeat as the same, and a birthday and another branch's hours as new. The eyes read a photographed receipt line by line (a total of KES 730.00, paid by M-Pesa) in about 25 s including loading the vision model, and the 8B then answered both questions about it from memory. When the router sees memory, a question naming a person or business found in its five closest notes goes to memory outright, and otherwise the model judges with the closest note in view; routing blind, the 8B had sent "the number plate of Kitengela Ventures' delivery truck" to its own knowledge, and seeing memory it routed 13 of 14 test questions right on its Long Haul memory, the miss being a never-said name that it then answered honestly (E-55). Figure 5.18 shows the receipt answered later from memory. These are demonstrations on a handful of cases, not benchmarks.

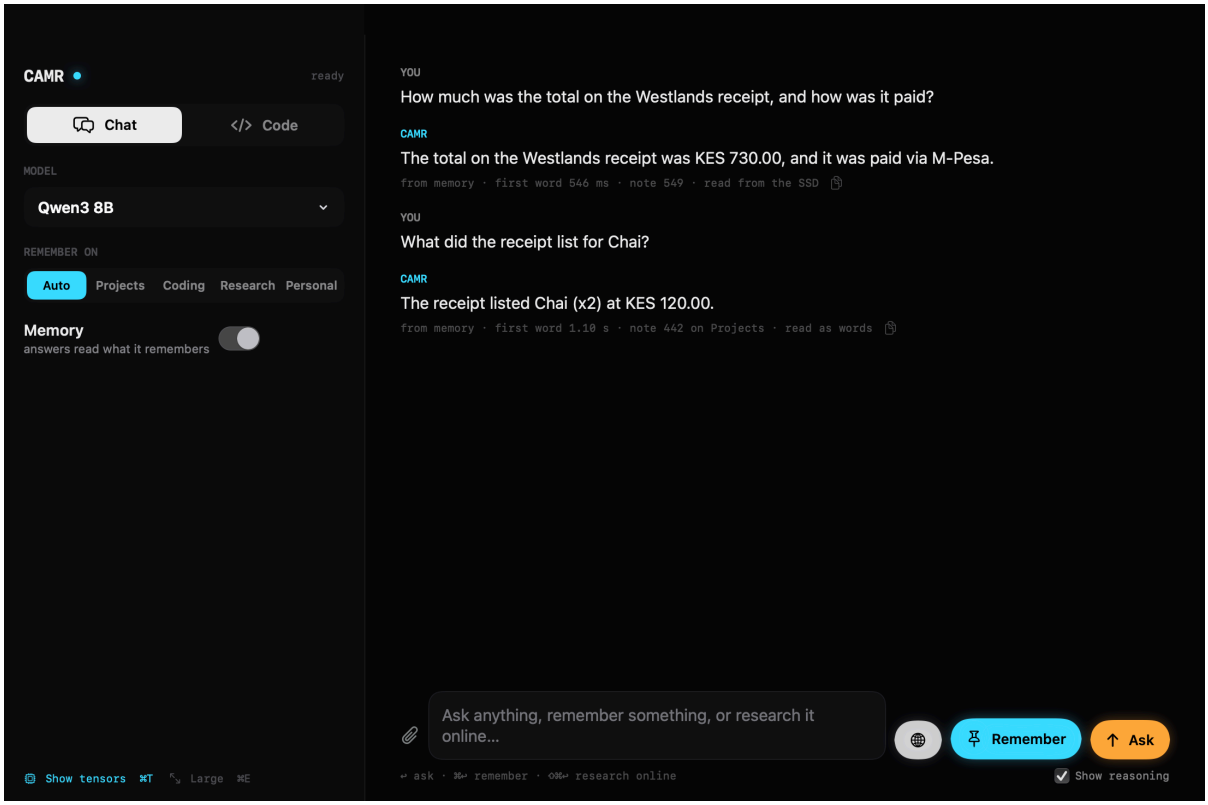


Figure 5.18: (Captured on 4 November, before the Code screen was folded into Chat.) A photographed receipt read into memory by Qwen3-VL-4B-Thinking, its total and an item answered later by the 8B from memory ("from memory · note 549 · read from the SSD")

5.8.15 **The Public Suites**

Table 5.22 gives the public suites. On the three mathematics suites, which test reasoning with nothing to remember, both Claude models were strong; HARP shows how much a worked correction in the context helps a related new problem.

Table 5.22: Right answers on the public suites

Suite	**Claude Haiku 5.5**	**Claude Sonnet 5.5**	**Ollama 1.7B alone**	**Ollama 1.7B with the pairing**
MATH-500, levels 3 to 5 (50)	44	47		
AIME 2025 and 2026 (60)	54	56		
HARP pairs, correction told (60)	55	58	28	34
HARP pairs, nothing told (60)	48	52	21	21
BABILong qa1–qa5, 4k to 128k (100)	78		39	20

For Claude, the told correction raised HARP from 48 to 55 (Haiku) and from 52 to 58 (Sonnet): a worked solution in the context carries to a new problem of the same kind. Haiku answered 78 of 100 BABILong items from 4k to 128k tokens.

5.8.16 **The Ollama Pairing on the Suites**

The Ollama 1.7B answers with its thinking off, so on HARP it was given the same room to work in words that Claude has to think in (8,192 tokens; E-43). With that room, a told correction helped it, and the pairing carried the correction better than the model's own window did: with the correction told, the paired model answered 34 of 60 and the bare one 28; with nothing told, both answered 21. At the shared 400-token limit, 82 of the bare model's 120 answers and 95 of the paired one's had been cut off mid-working, and both had scored 10 or 11 either way; those records are kept beside the reruns (D-04).

On BABILong the pairing lost: 20 of 100 against 39 for the bare model reading the newest 32,768 tokens (Table 5.23). Its questions ask where something is now, which needs the latest of many mentions, and the pairing's 512 tokens of notes hold too few of them (E-43). At 4k and 16k tokens the bare model sees the whole story, and it answered 16 and 10 of 25 against the pairing's 6 and 6; at 64k and 128k both fell. Claude Haiku, reading every story whole, answered 18 to 21 of 25 at every length. The bare runs' 58 answers lost to the empty-thinking check (D-03) were resumed before these counts were taken.

Table 5.23: BABILong by story length (25 items each; qa1 to qa5)

Length	**Ollama 1.7B alone (newest 32K)**	**Ollama 1.7B with the pairing**	**Claude Haiku 5.5**
4k	16	6	20
16k	10	6	21
64k	5	3	19
128k	8	5	18
All (100)	39	20	78

Memory as words through the pairing therefore helps where one worked example carries to the next problem, and hurts where the answer is the newest of many similar mentions. The engine's own contenders, which read whole rooms with dates, were not run on these suites (E-36).

5.8.17 **Development Evidence: the Rooms Build on Scripted Lives**

> **In plain words.** Before the final engine, its first build was tested on three invented twelve-week lives. Its notes answered as well as the words they came from, it stayed as fast in week 12 as in week 1, and it did errands three times as well as the baseline. It also made things up about what it was never told.

The rooms build stored one room of notes per question and was judged on the three held-out lives, with pass marks written before the runs (E-19, E-20). Its design came from a negative finding: notes written one moment at a time, then laid side by side, lost the thread; with 30 unrelated moments beside the right one, the reader found 2 of 46 facts from such notes against 32 from the words (E-15). Writing each room as one page fixed this within a room, and Table 5.24 shows the desk that won.

Table 5.24: Desks compared on the development lives at day 83, MacBook Air (E-16)

Desk	Knows (of 255)	First word
Words, 3 rooms	144	1.65 s
Notes, 3 rooms, plus 4 closest moments	142	0.35 s
4 closest moments as words, no room	135	0.45 s
Notes, 1 room	120	0.17 s
Notes, 1 room, plus 4 closest moments	**158**	**0.36 s**

On the proof lives at week 12 (Table 5.25) the rooms build was level with the baseline on the same 1.7B reader, at half the wait and 0.4 GB less RAM, and without the baseline's hand-written rules. Paired over the 255 told facts, 138 were known by both, 26 by the rooms build alone and 28 by the baseline alone. Its notes gave the same answer as the words on 3,483 of 3,600 questions. Its wait stayed at 0.064 to 0.072 s in every week of every life while its notes on the SSD grew from 82 MB to 963 MB, and its peak RAM (as MLX reports it) stayed between 1.65 and 1.83 GB.

Table 5.25: The proof lives at week 12, three lives added (E-20)

Contender	Knows (of 255)	False memories (of 45)	First word	Peak RAM
1.7B alone	0	0	0.05 s	1.31 GB
Perfect reader (every note pasted in)	90	17	1.90 s, climbing	2.77 GB
CAMR v1 (baseline), 1.7B	166	29	0.15 s	2.24 GB
CAMR v1 (baseline), 4B	208	10	0.35 s	3.58 GB
Rooms build, 1.7B	**164**	**25**	**0.07 s**	**1.82 GB**
Rooms build, the same memory read as words	163	24	0.09 s	2.20 GB

The errands separated the memories most (Table 5.26). Each quiz question became an errand whose tool needs that exact fact; "Where does my vet live?" became "Book me a ride to my vet's home", which calls `book_ride(destination)`. The rooms build did three times as many errands right as the baseline, although the two were level on the quiz, because the baseline's gates were tuned for questions and a request falls past them, whereas the rooms build opens the closest room however the task is worded (E-25). No memory ever asked when it did not know: the rooms build made up 42 of the 45 never-told errands. That was the clearest weakness of the first build; the final engine's 4B declined 9 to 10 of 10 never-said questions on the Long Haul.

Table 5.26: Errands on the proof lives, last day, 1.7B reader (E-25)

Memory	Right (of 255)	Old value	Made up (of 45)	Asked	First word
None	1	0	44	0	0.15 s
CAMR v1 (baseline)	40	6	45	0	0.16 s
Rooms build	**122**	16	42	0	0.19 s

The speed bench measured how the wait grows with the memory on the desk (Table 5.27). Notes met the 0.5 s mark at 2,000 words, but were 4.6 times sooner than words rather than the 10 times required by NFR-02. The 10 times had been estimated on the MacBook Air, which read text about eight times more slowly than the Pro (about 800 against 6,600 tokens a second; E-17). Notes skip the reading but still pay for the SSD read and the copy into graphics memory, so their head start grows with the room.

Table 5.27: Time to the first word by memory on the desk, median of 5 (E-20)

Words in the room	Notes read	Notes	Words	Notes sooner by
253	75 MB	0.078 s	0.148 s	1.9×
1,002	294 MB	0.116 s	0.431 s	3.7×
2,006	588 MB	0.233 s	1.080 s	4.6×
3,007	894 MB	0.278 s	1.605 s	5.8×

The room size was tuned on the development lives for the most facts known (E-18): rooms of up to 512 tokens with a join threshold of 0.80 (208 tokens on average) and four moments re-read knew 164 of 255 facts; rooms of up to 1,024 and 2,048 tokens knew fewer at every setting tried (131 to 158). A small, fixed desk is best for a small reader, which agrees with the baseline, where 128 tokens was best for a 0.5B reader on facts.

5.8.18 **The Baseline, CAMR v1, on Public Benchmarks**

> **In plain words.** The first version of CAMR, which kept text notes, showed on public test sets that a small model with memory can match a cloud model on facts, but not on reasoning.

The baseline was evaluated before the engine existed, on CPU-only machines with Kimi K3 as the cloud ceiling. Its results still hold for the baseline and are the real-data complement to the scripted tests above; they are not results of the final engine. Table 5.28 summarises them.

Table 5.28: The baseline's main results on public benchmarks (CAMR v1)

Claim	Evidence	Result	Verdict
Long-tail facts: a small model with memory matches the cloud model	22-model sweep; PopQA	20 of 22 models reach or beat Kimi K3 closed-book (66.7%) with memory	Met
Multi-hop: memory closes part of the gap	HotpotQA, 200 held-out questions	3B + CAMR v1 54.0% against Kimi K3 51.8%; the 0.5B gains 23 points but stays far below	Met from 3B
The second hop found without a graph	2WikiMultiHopQA retrieval, 500 questions	Full-support recall 35.8% → 78.4% at the same budget	Met
Reasoning gaps closed by memory	GSM8K	No: a residual of 83.3 points; worked examples hurt the 0.5B	Not met
Few wrong facts stated	Held-out PopQA, 200, judged	3.0% wrong stated (Kimi K3 alone 31.5%), 60.5% right (Kimi 67.5%)	Met, at a cost in coverage

Memory beats fine-tuning on facts	The same documents	71.7% against 13.3%	Met
Retrieval at most 10% of answer time	Device profile	56% for the 0.5B under contention; met only from 1.5B	Not met for 0.5B

Three findings carried into the engine's design. Memory helps when the gap is knowledge and not when it is reasoning, which the Long Haul's families confirmed. More text distracts a small reader, so the budget should be small, which the room size confirmed. And recency and importance weighting lowered full-support recall on independent questions (by 1.2 points on 2WikiMultiHopQA and 5.4 on HotpotQA), so the engine chooses rooms by similarity alone.

5.9 **Discussion and Limitations**

This section discusses the results by objective. For each objective it states the implemented output, the evidence, the acceptance criterion, the observed result and what the result permits the study to conclude, compares it with the baseline and with Chapter 2 where that helps, and analyses the failures. The limitations close the chapter.

5.9.1 **Results by Objective**

Table 5.29 gives each claim of the study a verdict, grouped by the objective it serves, with the section that supports it.

Table 5.29: Scorecard: each claim, its evidence and whether it was met

Objective	**Claim**	**Evidence**	**Result**	**Verdict**
i	Selective techniques help a small model; separately written notes do not combine	Baseline; rooms build (Sections 5.8.18, 5.8.17)	Bridging 35.8% → 78.4% full-support recall; separate notes 2 of 46 facts against 32 as words	Met
ii	Notes and words know the same within a room	Rooms build (Section 5.8.17)	164 against 163 facts	Met
ii	Files remembered: PDFs, images, charts, video	Multimodal memory (Section 5.8.12)	29 of 29 planted facts with CAMR, for the vision model and the 4B; 0 for the vision model alone	Met, on a small test
iii	Lighter than the model reading its own window	Footprint (Section 5.8.9)	5.4–7.5 GB against 15.2 GB (4B); 8.1–8.8 GB against 13.6 GB (8B)	Met, after the cap (D-02)
iii	No slower as memory grows	Speed as memory grows (Section 5.8.8)	First word 0.11 → 0.08 s and RAM 4.26 → 4.23 GB from 112K to 2.01M tokens	Met
iii	Notes are at least 10 times sooner than words	Speed bench (Section 5.8.17)	4.6 times at 2,000 words	Not met
iv	A small model with CAMR answers like a cloud model on a long history	Long Haul at 2M (Section 5.8.1)	4B + CAMR 29 of 73; Sonnet alone 32, Opus 31, Haiku 10	Nearly met at 2M

iv	Past the cloud model's window, memory wins	Long Haul at 3M and 4M (Section 5.8.2)	4B + CAMR 29 and 29; Sonnet 13 and 10; Haiku 10 and 10	Met
iv	Memory beats the same model without it	Long Haul, every cut	4B: 25/26/25/29 against 18/14/20/11; 8B: 26/26/24/27 against 15/11/15/11	Met
iv	As accurate as conventional RAG, and faster	Section 5.9.7	164 against 166 facts (RAG baseline); first word 0.07 against 0.15 s; Long Haul 0.10–0.14 against 0.38–0.40 s through RAG	Met on speed; level on accuracy
iv	Faster than the cloud	First word (Section 5.8.7)	0.2–0.3 s against 13–105 s for Sonnet and Opus	Met
iv	Honest about what was never said	Never-said family	4B declined 9 of 10 at 2M and 10 of 10 past it; Claude 10 of 10	Met for the 4B; not for the 1.7B with its own wording
iv	Memory recovers knowledge, not reasoning	Families at 2M (Section 5.8.3)	Facts 6 of 10 (Sonnet and Opus 4, Haiku 0); two hops 0; the growing page 0 for everyone	Met as predicted
iv	Code built from memory	Café websites (Section 5.8.13)	4B: 10.0 of 10 rules with memory, 9.8 with the notes in the prompt, 3.0 with memory off	Met, on five cafés
v	The best reach	Reach (Section 5.8.11)	Project 26 of 40; global 24; session 11	Project reach
v	Smaller rooms, same answers	Storage at 8 and 4 bits (Section 5.8.10)	8 bits: 14 and 20, as 16 bits; 4 bits: 14 and 18	Met at 8 bits

5.9.2 **Objective i: Memory Techniques and Their Limits on the Device**

Implemented output and criterion. The techniques reviewed in Chapter 2 were built as switchable choices so that their value on a small on-device model could be measured, not assumed: similarity ranking against the composite of recency and importance, a gate and entity bridging in the baseline; and, in the engine, saved keys and values written one moment at a time against rooms written as one page. The criterion was a controlled comparison for each choice on held-out questions.

Observed result. Selective techniques that keep what the model reads small helped a small model; techniques that gave it more, or less related, text did not. Bridging found the second hop without a graph, raising full-support recall on 2WikiMultiHopQA from 35.8% to 78.4% at the same budget, while weighting by recency and importance lowered it (Section 5.8.18). Reusing a model's own keys and values worked within one room, where notes and words knew 164 and 163 facts, but notes written separately and laid side by side did not combine for a small reader (2 of 46 facts against 32 from the words; Section 5.8.17). This is the limit that cache blending works around by re-computing part of each stored cache where caches meet (Yao et al., 2025), and the reason the engine reads one room per question. A long window was not a substitute for memory: Claude's one-million-token window held only the newest days of a 3 or 4 million-token history and recalled nothing planted earlier (Section

5.8.2), which agrees with the evidence that long contexts are used unevenly even when they fit (Liu et al., 2024).

What this permits. On the tested device and models, the applicable techniques are those that keep the desk small and related; saved caches are usable only as whole rooms; and a long context window cannot stand in for a memory that outgrows it.

5.9.3 Objective ii: The Design of the Engine

Implemented output and criterion. The design of Chapter 4 was implemented: a write path that keeps each moment as the model's notes in a room, a read path that lays one room and four closest moments on the desk, tiers and sleep under fixed budgets, a vault, reach, and the assistant around them. Its acceptance criterion was NFR-07: within one room, notes must know at least 95% as many facts as the same desk read as words, with at most 3 extra false memories of 45; the assistant's parts were judged against the behaviour their requirements state.

Observed result. NFR-07 was met: 164 against 163 facts and 25 against 24 false memories, with the same answer on 3,483 of 3,600 questions (T-08; Section 5.8.17). On errands, where a tool needs the exact fact, the rooms build did three times as many right as the baseline (122 against 40), because it opens the closest room however a task is worded. The assistant behaved as specified on its test cases: 13 of 14 questions routed right, five revisions judged as expected, and 12 of 12 moments filed on the right shelf (T-18 to T-20), and every fact planted in PDFs, photographs, charts and videos was recalled from memory (Section 5.8.12). The design's structural limit showed in the families: a question sees one room, so facts told in two places were almost never joined (0 of 10 two-hop questions at 2M for the 4B; Section 5.8.3). Systems that page text in and out of a model's context (Packer et al., 2023) face the same choice of what to bring in; CAMR brings in one room already read.

What this permits. The design keeps and finds memory faithfully within a room and serves chat, files, code and evaluation through one read path. It does not join facts across rooms, and the assistant's results are demonstrations on a handful of cases, not benchmarks.

5.9.4 Objective iii: The Engine on a Consumer Laptop

Implemented output and criterion. The engine and the Mac app ran on a MacBook Pro M5 Pro with 24 GB and no dedicated graphics card, with the models and the memory on the Mac. The criteria were NFR-01 to NFR-06: a first word under 0.5 s at 2,000 words; notes at least 10 times sooner than words; no climb in the first word or RAM as memory grows; disk and RAM within budget; a capped buffer cache; and retrieval within 10% of the answer's time.

Observed result. Five of the six were met and one was not (Table 5.9). The first word at 2,000 words came in 0.233 s (NFR-01). From 112 thousand to 2.01 million tokens of history, the 1.7B's first word stayed at 0.08 to 0.15 s, retrieval at 17 to 24 ms and RAM at about 4.3 GB, while sleep held the room files at their 40 GB budget (NFR-03, NFR-04; Section 5.8.8). Retrieval took 4% of the 4B's answer time (NFR-06), where the baseline's 0.5B reader had spent 56% under contention. After the buffer

cache was capped, the 4B's whole process needed 5.4 to 7.5 GB at 3 and 4 million tokens, against 15.2 GB for the same model reading only its newest 64,000 tokens (NFR-05; Section 5.8.9). Notes were 4.6 times sooner than words, not 10 times (NFR-02): the mark had been estimated on the slower MacBook Air, and notes still pay for the SSD read and the copy into graphics memory. The cost of memory moved to storage: the room files reached their budget by about 1 million tokens, and past it most rooms were asleep and read as words (Table 5.12). Storing rooms at 8 bits, about half the size of 16 bits, gave the same answers, and with an 8 GB disk budget held the room files to 8.6 GB at 256K tokens against 34.3 GB (Section 5.8.10).

What this permits. A memory that grows to millions of tokens can run beside a small model on one Mac without slowing it or making it heavier, within a disk budget. The claim holds for the Mac and models tested; 8 GB Macs and older chips were not measured.

5.9.5 **Objective iv: The Capability Gap by Task Type**

Implemented output and criterion. The engine was evaluated against the same models without memory and against Claude Haiku, Sonnet and Opus 5.5 reading as much of the history as their windows hold, on the same questions graded by the same rules, with the first word, the RAM and the cost of every answer. The criterion was a comparison by family, with knowledge-bound and reasoning-bound families reported apart.

Observed result. Within its window the cloud model was better; beyond it, memory was. Up to 1M tokens Sonnet answered 28 to 43 questions per checkpoint against 25 to 26 for the 4B with CAMR; at 2M the 4B with CAMR answered 29 of 73 against Sonnet's 32 and Opus's 31; at 3M and 4M it answered 29 both times while Sonnet fell to 13 and 10 (Sections 5.8.1 and 5.8.2). Against the same model without memory the gain was large past the window: 29 against 11 for the 4B and 27 against 11 for the 8B at 2M. The first word came in 0.2 to 0.3 s, against 13 to 105 s for Sonnet and Opus (Section 5.8.7). By family, memory closed the knowledge gap but not the reasoning gap: CAMR led on facts told far back (6 against 4 of 10) and on code that had to use the project's own helpers (4 against 2), and trailed where several moments must be weighed (changed facts, look-alikes, corrected mathematics); no model built the page that needed a design from week 1 and a change from day 61 (Section 5.8.3). The baseline had found the same on public benchmarks: with memory, 20 of 22 small models matched the cloud model on long-tail facts, while memory left an 83-point gap on arithmetic (Section 5.8.18), in line with the finding that retrieval helps most on less popular facts (Mallen et al., 2023). The same held beyond plain text. Building café websites from memory, the 4B met 10.0 of 10 rules against 9.8 with the notes pasted in and 3.0 with memory off (Section 5.8.13); told 21 files among 100,000 tokens, the 4B with CAMR answered 37 of 37 against 17 alone (Section 5.8.12). The 4B was also honest: it declined 9 of 10 never-said questions at 2M and all 10 beyond it. Memory as words through the Ollama pairing was mixed: it helped where a worked example carried to a new problem (HARP, 34 against 28) and hurt where the answer is the newest of many similar mentions (BABILong, 20 against 39; Section 5.8.16).

What this permits. On one scripted project, a 4B model with CAMR nearly closes the gap to a cloud model at 2 million tokens and exceeds it past the cloud model's window, at a fraction of the wait and in a process of 5 to 8 GB; it closes knowledge-bound gaps, not reasoning-bound ones. The differences of one to three answers are within the noise of 10 questions per family.

5.9.6 **Objective v: How Much to Read, and What Each Part Contributes**

Implemented output and criterion. Controlled comparisons varied one choice at a time: the desk, the room size, notes against words, the reader's size, the wording, the reach, the precision of stored rooms and the buffer-cache cap. The criterion was the change in right answers, time and resources against the same set-up with that one choice reverted.

Observed result. For a small reader the best desk was small and fixed: one room of at most 512 tokens plus four moments re-read knew 158 facts on the development lives, more than three rooms read as words (144) or either part alone, and larger rooms knew fewer facts at every setting tried (Section 5.8.17). Saving notes rather than words bought speed, not accuracy: the same 1.7B answered 14 to 20 with notes and 16 to 17 with the same memory as words, three times sooner, at 40 GB of disk against 0.1 GB (Section 5.8.6), a comparison that is clean only at 64K and 256K, since most rooms were asleep later. A larger reader did not raise the ceiling: the 8B and the 27B answered 27 at 2M against the 4B's 29 (Section 5.8.4), so the memory, not the reader, set it. The smallest model's wording mattered more than its memory: its own wording raised its score from 15 to 21 at 2M but cut its honest declines from 7 to 3 (Section 5.8.5). Project memory was the best reach (26 of 40 against 11 for session and 24 for global; Section 5.8.11). Rooms at 8 bits kept every answer and 4 bits lost two (Section 5.8.10), and the buffer-cache cap halved the process's RAM with identical answers (Section 5.8.9).

What this permits. The engine should read a small, fixed desk per question, keep one memory per project, store rooms at 8 bits and cap the buffer cache; the saved notes are justified by speed, and a 4B reader is the best trade of answers against time and RAM on this Mac.

5.9.7 **CAMR Against Conventional RAG and Long-Context Pipelines**

The study's central comparison is between CAMR's memory, in which the model reads one room of its own saved notes already read plus four moments as words, and the conventional pipelines it is meant to replace: retrieval-augmented generation (RAG), which retrieves the closest text chunks and pastes them into the prompt to be read again at every question (Lewis et al., 2020), and long context, which pastes as much of the history as the window holds. Several experiments already measured these pipelines on the same questions, and Table 5.30 brings them together. The baseline, CAMR v1, is itself a conventional RAG pipeline with similarity ranking, a gate, entity bridging and a token budget; the Ollama pairing is RAG over CAMR's own memory, with the closest notes, at most 8 and 512 tokens, put before the last message; and the "words" contenders read CAMR's rooms as plain text.

Table 5.30: CAMR's memory against conventional pipelines, from the experiments of Section 5.8

Comparison	CAMR's memory	Conventional pipeline	Section
Rooms build against the RAG baseline, proof lives, 1.7B, week 12	164 facts of 255; 25 false memories; first word 0.07 s; 1.82 GB	CAMR v1 (RAG): 166 facts; 29 false memories; 0.15 s; 2.24 GB	5.8.17
Errands, where a tool needs the exact fact	122 of 255 right	CAMR v1 (RAG): 40	5.8.17
Long context: every note pasted in	164 facts; first word flat at 0.07 s	90 facts; first word 1.90 s and climbing	5.8.17
The same room as notes or as words, 2,000 words on the desk	First word 0.233 s	1.080 s (4.6 times slower)	5.8.17
Long Haul, 1.7B, same wording: notes against RAG through the pairing	14, 20, 17, 15 right; first word 0.10–0.14 s; 40 GB of disk	16, 17, 16, 16 right; 0.38–0.40 s; 0.1 GB	5.8.6
Long Haul at 2M: the 4B with notes against a 27B reading the same rooms as words	29 of 73; first word 0.21–0.31 s; 7.5 GB	27 of 73; 2.2–2.4 s; 16–17 GB	5.8.4
Long context in the cloud at 3M and 4M	4B + CAMR: 29 and 29; under 0.4 s	Claude Sonnet alone: 13 and 10; 13–70 s	5.8.2
Files: 37 questions, seed 1	4B + CAMR: 37; VL-3B + CAMR: 33	Ollama VL-3B with RAG: 34; the file in the prompt: 34	5.8.12
Café websites, rules met of 10 (4B)	10.0, in 3.6 steps	The notes pasted in the prompt: 9.8, in 9.0 steps	5.8.13

Three findings follow. First, on accuracy CAMR's memory matched conventional RAG rather than beating it: on the same questions the two were within one or two answers (164 against 166 facts; 14 to 20 against 16 to 17 on the Long Haul), which is within the noise of the samples. Its advantage on errands came from opening the closest room however a request was worded, where the RAG baseline's gate, tuned for questions, let requests fall past it. Second, on time and RAM CAMR was consistently better: the model does not re-read retrieved text, so the first word came two to four times sooner than RAG at the same size of reader, and about ten times sooner than a 27B reader given the same memory as words, in a process less than half the size. Long context was worst on both counts once the history grew: pasting every note in knew fewer facts and slowed with every week, and the cloud model's window forgot the start of the history. Third, the price of CAMR's memory is storage: saved notes take thousands of times the disk of their text, so past about 1M tokens most rooms slept and were read as words, which is RAG over well-organised rooms. CAMR is therefore best described as a RAG pipeline whose unit is a dated room of related moments that the model has already read, which keeps the speed of reading nothing twice where the disk allows and falls back to retrieval as words where it does not. Where the answer is the newest of many similar mentions, both RAG and CAMR need more than the closest few notes (BABILong: RAG 20 of 100 against 39 for the model's own window; Section 5.8.16).

5.9.8 **What Failed, and Why**

Table 5.31 lists every weakness the measurements found, including those that were fixed, because they show how the system failed before the fix.

Table 5.31: Weaknesses found

Weakness	Evidence	Cause	Status
Two hops are not joined	0 of 10 at 2M (4B)	One room per question seldom holds both halves, and the reader does not join rooms	Open: reading several rooms together
The growing page is never built	0 of 3 for every model at 2M	It needs the week-1 design and the day-61 change together	Open, for everyone
Changed facts and look-alikes trail Claude	3 against 5 at 2M	The newest of several values must be weighed against the others	Open
The 1.7B's honesty depends on its wording	Never said 3 of 10 at 2M (own wording) against 7 (yardstick's)	A small reader follows its instructions too literally either way	Bounded: both reported; the 4B is honest
RAM was understated	19.2 GB footprint against 5.7 GB reported (E-40)	MLX's unbounded buffer cache	Fixed: 1 GB cap, footprint logged
Notes are 10 times sooner than words	4.6 times (E-20)	The mark was set on a slower machine	Not met, kept
Notes are large	The room files reached the 40 GB budget by 1M tokens and were held there by sleep; 147,456 bytes per token for the 4B	Keys and values are about 29,000 times their text for the 1.7B, and more for the 4B	Bounded by sleep; distilling not built
Vision models invent answers about what was never told	With memory, 3 to 5 of 8 never-said questions answered (Table 5.20)	The describing model guesses where the 4B declines	Bounded: the 4B answers from the vision model's words
A rule in the notes is not always followed	The café price rule missed in three Code runs with its note on the desk (Section 5.8.13)	A small reader writes the common format	Open
Swarm was not measured	No benchmark	Built late, then removed from the app (E-50)	Removed

5.9.9 **Limitations, Delimitations and Threats to Validity**

Limitations are weaknesses of the evidence; each is stated with its likely effect.

i. **A scripted test.** The Long Haul is one invented project, fixed by its seed and built to be hard in known ways. It is not a sample of real work, and its results compare memories fairly on such a history but do not show how CAMR would serve a real user.

ii. **Small samples.** Each checkpoint asks 34 to 73 questions, 10 per family (3 for the page), so a difference of one or two answers is within noise; the 3-answer gap at 2M between CAMR and Sonnet is not a reliable ranking. No run was repeated for variance; only the 4B's 3M checkpoint was run twice, with identical verdicts.

iii. **Claude is a yardstick, not an opponent.** Claude answered with no memory, reading the newest part of the history that fits its window. A cloud model with its own

memory would do better past its window; the comparison shows what a window alone does, not the best a cloud service could do.

iv. **RAM before the cap is understated.** The 1.7B's and the 4B's RAM figures up to 2M were measured as MLX's peak, before the buffer-cache cap; the process held more (E-40). Their scores are unaffected.

v. **One machine.** Every Long Haul, suite and speed number was measured on one MacBook Pro M5 Pro with 24 GB (the desk design on the MacBook Air, and the baseline on CPU-only machines); answers also differ slightly between chips (158 facts on the Air and 164 on the Pro for the same design; E-17).

vi. **Grading by rule.** A rule can miss a right answer worded in an unexpected way. Every raw answer is kept in the records, so any verdict can be checked by hand, but no hand audit was done for this report.

vii. **What was not measured.** The engine's own contenders were not run on the public suites (E-36); LongMemEval and two further suites have loaders but no runs; the Code agent was measured only on five café websites per model; a held-out Long Haul comparison of CAMR against conventional RAG with the same reader and memory was pre-registered (E-61) and its harness built, but it was stopped before any held-out run, so the RAG comparison rests on the earlier experiments of Table 5.30; no user study and no accessibility audit were done; the app's screenshots come from one session.

Delimitations are boundaries chosen for the study: Apple-silicon Macs only; English text; frozen, quantised open models; no fine-tuning; memory on the device, with the cloud only as a yardstick. Threats to validity: internally, every contender read the same instructions and the same questions, and the one wording change (the 1.7B's) is reported both ways; externally, the results hold for one scripted project, one Mac and the models named.

Chapter 6: **Conclusions, Recommendations and Future Works**

6.1 **Introduction**

This chapter closes the chain from the problem and objectives of Chapter 1 to the implemented system and the evidence of Chapter 5. Section 6.2 states what the study established, objective by objective, with its contribution and the conditions within which the conclusions hold. Section 6.3 sets out what should be done on the basis of the findings, and Section 6.4 the work that remains. The chapter introduces no new experiments, results or citations: every statement rests on evidence, a limitation or an open question already reported in Chapter 5.

6.2 **Conclusions**

Small language models that run privately on a laptop know far less than large cloud models, and they forget whatever falls outside their context window. This study set out to measure how much of that capability gap a lightweight external memory engine bridges, by task type and at what cost. It built CAMR, which sits beside a frozen model on an Apple-silicon Mac and keeps the model's own notes, its keys and values, in rooms on the SSD, together with a native Mac application with Chat and Code. It evaluated CAMR against the same models without memory and against Claude Haiku, Sonnet and Opus 5.5 reading as much of the history as their windows hold. The conclusions follow the order of the specific objectives (Section 1.3.2).

6.2.1 **Objective i: Techniques and Their Limits on a Device**

On a small on-device model, memory techniques that keep what the model reads small and related work, and techniques that give it more or less related text do not. Entity bridging found the second hop of a question without a graph, while weighting by recency and importance hurt; saved caches were usable as whole rooms but not when written separately and combined; and a long context window did not substitute for memory once the history outgrew it (Section 5.9.2).

6.2.2 **Objective ii: The Design**

The design of one room of the model's own notes plus the four closest moments, with tiers, sleep, a vault, reach and an assistant around it, keeps and finds memory faithfully: within a room, notes knew as many facts as the words they came from, meeting the requirement set before the test. It serves chat, files, code and evaluation through one read path. Its structural limit is that a question sees one room, so facts told in two places were almost never joined (Section 5.9.3).

6.2.3 **Objective iii: On the Device**

The engine and its application run entirely on one consumer Mac, and the memory can grow on the SSD without making the model slower or heavier: the wait for the first word and the RAM stayed flat as the history grew from 112 thousand to 2 million tokens, and the 4B's whole process needed 5 to 8 GB after the graphics buffer cache was capped. Five of the six device requirements were met; notes were 4.6 times sooner than words rather than the 10 times required. The cost of memory moved to storage, which sleep and 8-bit rooms keep within a budget (Section 5.9.4).

6.2.4 **Objective iv: Evaluation of the Gap**

Within its window the cloud model was better; beyond it, memory was. At 2 million tokens a 4B model with CAMR answered 29 of 73 questions against 32 for Claude Sonnet alone, and at 3 and 4 million it still answered 29 while Sonnet fell to 13 and 10, with a first word in a third of a second instead of 13 to 105 seconds. Memory closed knowledge-bound gaps (facts told long ago, code that must use the project's own helpers, facts kept from files) and not reasoning-bound ones (joining facts, weighing changed values, building on a design over weeks). The 4B was also honest about what it had never been told (Section 5.9.5). Against conventional retrieval-augmented generation over the same memory, CAMR answered as many questions, two to four times sooner and with errands done three times as often; against pasting the history into a long context, it knew more and stayed fast as the history grew (Section 5.9.7).

6.2.5 **Objective v: How Much to Read, and What Each Part Contributes**

A small reader should read a small, fixed desk: one room of at most 512 tokens and four moments. The memory's organisation into dated rooms chosen by similarity carried the answers; the saved notes bought speed rather than accuracy; a larger reader did not raise the ceiling; project memory was the best reach; 8-bit rooms kept every answer; and the smallest model's wording mattered more than its memory (Section 5.9.6).

Table 6.1 summarises how each objective was answered.

Table 6.1: Alignment from objectives to evidence and conclusions

Objective	**Evidence (Chapter 5)**	**Conclusion**	**Status**
i. Investigate techniques and their limits	5.9.2	Selective, small desks work; separately written notes do not combine; a long window forgets the start	Met
ii. Design a lightweight memory engine	5.9.3	One room of the model's own notes plus four moments, with tiers, a vault, reach and an assistant; faithful within a room	Met, with one structural limit (one room per question)
iii. Implement it on a consumer laptop	5.9.4	Runs on the Mac, flat in time and RAM as memory grows; 5 to 8 GB at 3 to 4 million tokens	Met, except NFR-02 (10 times sooner)
iv. Evaluate the gap by task type	5.9.5	Nearly level with Sonnet at 2 million tokens, ahead past its window; knowledge closed, reasoning not	Met on a scripted test
v. Determine how much to read and what each part adds	5.9.6	A small fixed desk; notes buy speed; the memory sets the ceiling; project reach; 8-bit rooms	Met

6.2.6 **Contribution**

The study contributes:

i. An open memory engine that keeps a frozen model's own keys and values in rooms on the SSD, with a core in RAM, tiers and sleep under fixed budgets, a vault a person can read, and reach, whose wait and RAM stayed flat as memory grew to 2 million tokens.

ii. The Long Haul, a scripted project of 2 to 4 million tokens with questions graded by rule in eight families that each isolate one way of failing, and a harness in which every answer records what it cost and every number names the code that made it.

iii. A measured comparison of 1.7B to 27B local models with memory against Claude Haiku, Sonnet and Opus alone, within and past the cloud model's window, with time, RAM and cost per answer.

iv. A native Mac chat application, installed like any other, that routes, researches, reads files, revises its memory and files it on topic shelves, answers code in the conversation, compares CAMR with RAG on any question, and shows the engine's tensors at work; and a pairing that gives Ollama and other local servers memory as words.

6.2.7 **Conditions Within Which the Conclusions Hold**

The conclusions hold for one scripted software project, fixed by its seed, with 10 questions per family per checkpoint, so differences of one to three answers are within noise; for the Qwen3 models named, on one MacBook Pro M5 Pro with 24 GB; and for Claude answering alone, without a memory of its own. The application was demonstrated, not evaluated with users. These limits are set out in Section 5.9.9. Within them, the study's answer to its question is that a memory outside the window bridges nearly all of the gap on knowledge at 2 million tokens, more than all of it once the history outgrows the cloud model's window, and little of it where the answer must be reasoned across several facts.

6.3 **Recommendations**

Each recommendation follows from a result or limitation in Chapter 5 and names its audience. Essential safeguards come first; the others are improvements in order of priority (Table 6.2).

Table 6.2: Recommendations

Priority	**Audience**	**Recommended action**	**Evidence-based reason**	**Condition**
1. Essential	Anyone measuring memory on Apple silicon	Cap MLX's buffer cache and record the process's footprint, not only MLX's peak	The footprint was 19.2 GB while 5.7 GB was reported; the cap gave 7.5 GB with identical answers (Section 5.8.9)	Applies to every long ingest on MLX
2. Essential	Developers letting a small model act from memory	Use a reader that declines what it was never told, and keep every tool call and shell command behind the user's approval	The 1.7B made up 42 of 45 never-told errands; the vision models invented 3 to 5 of 8 never-said answers; the 4B declined 9 to 10 of 10 (Sections 5.8.17, 5.8.12, 5.8.3)	Until a check before answering exists (future work 3)

3. High	Developers of on-device assistants	Keep a growing memory outside the context window, in dated rooms on the SSD, and read one small room per question	The first word and RAM stayed flat from 112 thousand to 2 million tokens, and answers held at 2, 3 and 4 million (Sections 5.8.8, 5.8.2)	For knowledge-bound use; not for joining facts
4. High	The same	Prefer a 4B reader on a 24 GB Mac, store rooms at 8 bits and keep a disk budget per shelf	The 8B and 27B did not answer more; 8-bit rooms kept every answer (Sections 5.8.4, 5.8.10)	On the Mac tested; other Macs need measuring
5. High	Users and builders of the application	Keep one memory per project, not per conversation or one for everything	Project reach 26 of 40; session 11; global 24 (Section 5.8.11)	Where projects share look-alike names, keep them apart
6. Medium	Builders of memory engines	Fix the model's instructions before any test run, and report a small model under more than one wording	The 1.7B scored 15 or 21 at 2 million tokens by wording alone (Section 5.8.5)	Small readers especially
7. Medium	Researchers evaluating memory	Test past the cloud model's window, count declines on never-said questions apart from facts known, and log the cost of every answer	Results changed order past the window (Section 5.8.2); per-answer cost and wait differed by orders of magnitude (Section 5.8.7)	Any long-history benchmark
8. Lower	The researcher and supervisor	Obtain ethics approval and agree acceptance criteria before any study of the application with real users	No user acceptance or accessibility test was run (Table 5.9)	Before any claim about real users

6.4 **Future Works**

Each direction extends CAMR from a limitation or open question in Chapter 5, in order of expected value (Table 6.3).

Table 6.3: Prioritised future works

Priority	**Direction and rationale**	**What would change**	**Data and resources required**	**How to evaluate**
1	**Several rooms read together.** One room per question joined 0 of 10 two-hop questions at 2 million tokens, and notes written apart do not combine for a small reader	Re-encode where rooms meet, in the manner of cache blending, so that two rooms can share a desk	The Long Haul; the existing harness; the same Mac	Two-hop and changed-fact families, at a first word no higher than one room's
2	**Sleep that distils.** Notes are about 29,000 times their text, and sleep now only puts rooms away as words	Naps on the charger that distil what was learnt, checked by a quiz before it is kept	The Long Haul cuts; overnight compute on the Mac	Disk per million tokens and Long Haul scores before and after a night's sleep

3	**Settling unsure facts at recall.** The smallest reader and the vision models guessed when they did not know, and changed facts were often answered with an old value	A check before answering that resolves doubt from the moments or asks the user	The never-said and changed-fact probes	Never-said declines and stale answers, with facts known not falling
4	**The pre-registered CAMR-against-RAG run.** The harness for a held-out Long Haul comparison with the same reader and memory, including desks of several rooms and an equal-memory latency curve, was built and pre-registered (E-61) but stopped before it ran	Larger desks of notes, which RAG would have to re-read as text	The seed-1 Long Haul to 2M tokens; about a day of the Mac's GPU	Right answers with McNemar's test, first word, prefill and memory in view, as pre-registered
5	**The engine on the public suites and LongMemEval.** The suites ran on Claude and Ollama only; LongMemEval has a loader but no run	The engine's own contenders, with their own wording, on public data	The suites already downloaded; LongMemEval's files and judge	Suite accuracy and LongMemEval by question type
6	**The native engine behind the pairing.** Through Ollama and the OpenAI-compatible endpoint, memory goes in as words	Notes rather than words behind the endpoint	The pairing's tests; one Ollama-compatible reader in MLX	First word and accuracy through the endpoint, notes against words
7	**Other Macs and real users.** One M5 Pro was measured, and no user has used the app over weeks	The minimum configuration, and evidence from real use	Two more Macs (8 GB and an older chip); ethics approval and participants	The Long Haul on each Mac; task success and usability in a study of several weeks
8	**The page that grows.** No model, Claude included, built the page that needed a design from week 1 and a change from day 61	A Code agent that reads the design and every later change before it writes	The three page probes; a headless browser	The page probes' checks, against the same agent with one room

References

Abdin, M., Aneja, J., Awadalla, H., Awadallah, A., Awan, A. A., Bach, N., Bahree, A., Bakhtiari, A., Bao, J., Behl, H., et al. (2024). Phi-3 technical report: A highly capable language model locally on your phone. *arXiv preprint arXiv:2404.14219*.

Balunović, M., Dekoninck, J., Petrov, I., Jovanović, N., & Vechev, M. (2025). MathArena: Evaluating LLMs on uncontaminated math competitions. *arXiv preprint arXiv:2505.23281*.

Borgeaud, S., Mensch, A., Hoffmann, J., Cai, T., Rutherford, E., Millican, K., van den Driessche, G., Lespiau, J.-B., Damoc, B., Clark, A., et al. (2022). Improving language models by retrieving from trillions of tokens. *Proceedings of the 39th International Conference on Machine Learning, PMLR 162*, 2206–2240.

Chen, Z., Xiang, Z., Xiao, C., Song, D., & Li, B. (2024). AgentPoison: Red-teaming LLM agents via poisoning memory or knowledge bases. *Advances in Neural Information Processing Systems 37*.

Chevalier, A., Wettig, A., Ajith, A., & Chen, D. (2023). Adapting language models to compress contexts. *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, 3829–3846.

Chhikara, P., Khant, D., Aryan, S., Singh, T., & Yadav, D. (2025). Mem0: Building production-ready AI agents with scalable long-term memory. *arXiv preprint arXiv:2504.19413*.

Cobbe, K., Kosaraju, V., Bavarian, M., Chen, M., Jun, H., Kaiser, L., Plappert, M., Tworek, J., Hilton, J., Nakano, R., Hesse, C., & Schulman, J. (2021). Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*.

Collins, A. M., & Loftus, E. F. (1975). A spreading-activation theory of semantic processing. *Psychological Review, 82*(6), 407–428.

Dai, Z., Yang, Z., Yang, Y., Carbonell, J., Le, Q. V., & Salakhutdinov, R. (2019). Transformer-XL: Attentive language models beyond a fixed-length context. *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 2978–2988.

Dong, S., et al. (2025). A practical memory injection attack against LLM agents. *arXiv preprint arXiv:2503.03704*.

Ge, T., Hu, J., Wang, L., Wang, X., Chen, S.-Q., & Wei, F. (2024). In-context autoencoder for context compression in a large language model. *Proceedings of the Twelfth International Conference on Learning Representations*.

Gemma Team. (2024). Gemma 2: Improving open language models at a practical size. *arXiv preprint arXiv:2408.00118*.

Gim, I., Chen, G., Lee, S., Sarda, N., Khandelwal, A., & Zhong, L. (2024). Prompt Cache: Modular attention reuse for low-latency inference. *Proceedings of Machine Learning and Systems 6*.

Grattafiori, A., et al. (2024). The Llama 3 herd of models. *arXiv preprint arXiv:2407.21783*.

Gunter, T., et al. (2024). Apple Intelligence foundation language models. *arXiv preprint arXiv:2407.21075*.

Gutierrez, B. J., Shu, Y., Gu, Y., Yasunaga, M., & Su, Y. (2024). HippoRAG: Neurobiologically inspired long-term memory for large language models. *Advances in Neural Information Processing Systems 37*.

Hannun, A., Digani, J., Katharopoulos, A., & Collobert, R. (2023). *MLX: Efficient and flexible machine learning on Apple silicon* [Computer software]. Apple. https://github.com/ml-explore/mlx

Hendrycks, D., Burns, C., Kadavath, S., Arora, A., Basart, S., Tang, E., Song, D., & Steinhardt, J. (2021). Measuring mathematical problem solving with the MATH dataset. *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks 1*.

Hevner, A. R., March, S. T., Park, J., & Ram, S. (2004). Design science in information systems research. *MIS Quarterly, 28*(1), 75–105.

Ho, X., Nguyen, A.-K. D., Sugawara, S., & Aizawa, A. (2020). Constructing a multi-hop QA dataset for comprehensive evaluation of reasoning steps. *Proceedings of the 28th International Conference on Computational Linguistics*, 6609–6625.

ISO/IEC. (2023). *ISO/IEC 25010:2023 Systems and software engineering: Systems and software Quality Requirements and Evaluation (SQuaRE): Product quality model*. International Organization for Standardization.

ISO/IEC/IEEE. (2018). *ISO/IEC/IEEE 29148:2018 Systems and software engineering: Life cycle processes: Requirements engineering*. International Organization for Standardization.

Izacard, G., Lewis, P., Lomeli, M., Hosseini, L., Petroni, F., Schick, T., Dwivedi-Yu, J., Joulin, A., Riedel, S., & Grave, E. (2023). Atlas: Few-shot learning with retrieval augmented language models. *Journal of Machine Learning Research, 24*(251), 1–43.

Jiang, H., Wu, Q., Lin, C.-Y., Yang, Y., & Qiu, L. (2023). LLMLingua: Compressing prompts for accelerated inference of large language models. *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, 13358–13376.

Kaplan, J., McCandlish, S., Henighan, T., Brown, T. B., Chess, B., Child, R., Gray, S., Radford, A., Wu, J., & Amodei, D. (2020). Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*.

Karpukhin, V., Oguz, B., Min, S., Lewis, P., Wu, L., Edunov, S., Chen, D., & Yih, W.-t. (2020). Dense passage retrieval for open-domain question answering. *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*, 6769–6781.

Kuratov, Y., Bulatov, A., Anokhin, P., Rodkin, I., Sorokin, D., Sorokin, A., & Burtsev, M. (2024). BABILong: Testing the limits of LLMs with long context reasoning-in-a-haystack. *Advances in Neural Information Processing Systems 37, Datasets and Benchmarks Track*.

Kwon, W., Li, Z., Zhuang, S., Sheng, Y., Zheng, L., Yu, C. H., Gonzalez, J. E., Zhang, H., & Stoica, I. (2023). Efficient memory management for large language model serving with PagedAttention. *Proceedings of the 29th Symposium on Operating Systems Principles*, 611–626.

Lewis, P., Perez, E., Piktus, A., Petroni, F., Karpukhin, V., Goyal, N., Küttler, H., Lewis, M., Yih, W.-t., Rocktäschel, T., Riedel, S., & Kiela, D. (2020). Retrieval-augmented generation for knowledge-intensive NLP tasks. *Advances in Neural Information Processing Systems 33*, 9459–9474.

Lightman, H., Kosaraju, V., Burda, Y., Edwards, H., Baker, B., Lee, T., Leike, J., Schulman, J., Sutskever, I., & Cobbe, K. (2024). Let's verify step by step. *Proceedings of the Twelfth International Conference on Learning Representations*.

Liu, N. F., Lin, K., Hewitt, J., Paranjape, A., Bevilacqua, M., Petroni, F., & Liang, P. (2024). Lost in the middle: How language models use long contexts. *Transactions of the*

Association for Computational Linguistics, 12, 157–173.

Lu, Z., Li, X., Cai, D., Yi, R., Liu, F., Zhang, X., Lane, N. D., & Xu, M. (2024). Small language models: Survey, measurements, and insights. *arXiv preprint arXiv:2409.15790*.

Maharana, A., Lee, D.-H., Tulyakov, S., Bansal, M., Barbieri, F., & Fang, Y. (2024). Evaluating very long-term conversational memory of LLM agents. *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics*, 13851–13870.

Mallen, A., Asai, A., Zhong, V., Das, R., Khashabi, D., & Hajishirzi, H. (2023). When not to trust language models: Investigating effectiveness of parametric and non-parametric memories. *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics*, 9802–9822.

Packer, C., Wooders, S., Lin, K., Fang, V., Patil, S. G., Stoica, I., & Gonzalez, J. E. (2023). MemGPT: Towards LLMs as operating systems. *arXiv preprint arXiv:2310.08560*.

Park, J. S., O'Brien, J., Cai, C. J., Morris, M. R., Liang, P., & Bernstein, M. S. (2023). Generative agents: Interactive simulacra of human behavior. *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology*, 1–22.

Peffers, K., Tuunanen, T., Rothenberger, M. A., & Chatterjee, S. (2007). A design science research methodology for information systems research. *Journal of Management Information Systems, 24*(3), 45–77.

Su, J., Ahmed, M., Lu, Y., Pan, S., Bo, W., & Liu, Y. (2024). RoFormer: Enhanced transformer with rotary position embedding. *Neurocomputing, 568*, 127063.

Teyler, T. J., & DiScenna, P. (1986). The hippocampal memory indexing theory. *Behavioral Neuroscience, 100*(2), 147–154.

Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, Ł., & Polosukhin, I. (2017). Attention is all you need. *Advances in Neural Information Processing Systems 30*, 5998–6008.

Wu, D., Wang, H., Yu, W., Zhang, Y., Chang, K.-W., & Yu, D. (2024). LongMemEval: Benchmarking chat assistants on long-term interactive memory. *arXiv preprint arXiv:2410.10813*.

Wu, Y., Rabe, M. N., Hutchins, D., & Szegedy, C. (2022). Memorizing transformers. *Proceedings of the Tenth International Conference on Learning Representations*.

Xiao, S., Liu, Z., Zhang, P., & Muennighoff, N. (2024). C-Pack: Packed resources for general Chinese embeddings. *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, 641–649.

Yang, A., et al. (2024). Qwen2.5 technical report. *arXiv preprint arXiv:2412.15115*.

Yang, A., et al. (2025). Qwen3 technical report. *arXiv preprint arXiv:2505.09388*.

Yang, Z., Qi, P., Zhang, S., Bengio, Y., Cohen, W. W., Salakhutdinov, R., & Manning, C. D. (2018). HotpotQA: A dataset for diverse, explainable multi-hop question answering. *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, 2369–2380.

Yao, J., Li, H., Liu, Y., Ray, S., Cheng, Y., Zhang, Q., Du, K., Lu, S., & Jiang, J. (2025). CacheBlend: Fast large language model serving for RAG with cached knowledge fusion. *Proceedings of the Twentieth European Conference on Computer Systems*, 94–109.

Yue, A. S., Madaan, L., Moskovitz, T., Strouse, D. J., & Singh, A. K. (2024). HARP: A challenging human-annotated math reasoning benchmark. *arXiv preprint*

arXiv:2412.08819.

Zhang, Y., et al. (2025). Qwen3 Embedding: Advancing text embedding and reranking through foundation models. *arXiv preprint arXiv:2506.05176*.

Zhong, W., Guo, L., Gao, Q., Ye, H., & Wang, Y. (2024). MemoryBank: Enhancing large language models with long-term memory. *Proceedings of the AAAI Conference on Artificial Intelligence, 38*(17), 19724–19731.

Appendix A: Reproducing the Results

Every number in Chapter 5 comes from a record in `v2/records/bench/2026-11-04/` of the repository, and every record can be made again with the commands below, run from `v2/` on an Apple-silicon Mac after `sh scripts/install.sh`. One measuring job should run at a time (E-35). Claude runs need an Anthropic key in `~/.config/camr/anthropic.env`; every Claude call is held in the ledger against the cap.

Build and inspect the Long Haul, and grade any answers:

```
.venv/bin/python -m camr_engine.bench.haul build --seed 1 --out work/haul/s1
.venv/bin/python -m camr_engine.bench.longhaul show --dir work/haul/s1
.venv/bin/python -m camr_engine.bench.haul grade --dir work/haul/s1 --
answers answers.jsonl --cut 1M
```

Run the engine, a bare model, Ollama and Claude on the Long Haul:

```
.venv/bin/python -m camr_engine.bench.local longhaul --contender
engine:qwen3-4b --dir work/haul/s1
.venv/bin/python -m camr_engine.bench.local longhaul --contender bare:qwen3-
4b --dir work/haul/s1
.venv/bin/python -m camr_engine.bench.ollama_run longhaul --contender
ollama:qwen3-1.7b --dir work/haul/s1
.venv/bin/python -m camr_engine.bench.longhaul claude --model claude-sonnet-
5-5 --dir work/haul/s1
```

Measure the wait as memory grows, and how fast each model reads and writes on this Mac:

```
.venv/bin/python -m camr_engine.bench.local speed --contender engine:qwen3-
1.7b --dir work/haul/s1
.venv/bin/python -m camr_engine.bench.throughput --out records/bench
```

Run the public suites:

```
.venv/bin/python -m camr_engine.bench.suite_run babilong --contender ollama-
bare:qwen3:1.7b --n 20
.venv/bin/python -m camr_engine.bench.suite_run harp --contender
ollama:qwen3-1.7b --n 20
.venv/bin/python -m camr_engine.bench.suite_run math500 --contender claude-
haiku-5-5 --n 50 --max-usd 10
```

Table A.1 lists the records behind each result.

Rebuild this report's charts and diagrams, and the report itself, from the repository root:

```
python docs/thesis/figures/src/make_charts.py
python docs/thesis/diagrams/src/final_diagrams.py
python docs/thesis/build_thesis.py
```

Table A.1: The records behind Chapter 5 (`v2/records/bench/2026-11-04/`)

Result	Record files
The 4B with CAMR, 64K to 2M; 3M without and with the cap; 3M and 4M	`071525-longhaul-engine-qwen3-4b.json`; `100255-…`; `143706-longhaul-engine-qwen3-4b.json`
The 4B alone	`092854-longhaul-bare-qwen3-4b.json`; `155141-longhaul-bare-qwen3-4b.json`
The 8B with CAMR and alone	`161208-longhaul-engine-qwen3-8b.json`; `171043-longhaul-bare-qwen3-8b.json`
The 27B with the memory as words	`172930-longhaul-words-qwen-27b.json`
The 1.7B, both wordings, with CAMR and alone	`044359-…`, `062857-…`, `051530-…`, `070454-longhaul-*-qwen3-1.7b*.json`
Ollama on the Long Haul	`053819-longhaul-ollama-qwen3-1.7b.json`; `052439-longhaul-ollama-bare-qwen3-1.7b.json`
Claude on the Long Haul	`022518-…`, `022717-…`, `023106-…`, `094146-…`, `094325-claude-*-longhaul.json`
Speed as memory grows	`055344-speed-engine-qwen3-1.7b.json`
Code: café websites (5 November)	`013817-code-cafe-code-qwen3-4b.json`, `014735-code-cafe-code-qwen3-8b.json`
Storage at 16, 8 and 4 bits (5 November)	`003939-…-16bit.json`, `004714-…-8bit-8GB.json`, `004321-…-4bit.json`
Reach	`195128-…`, `195633-…`, `200137-…`, `201043-reach-engine-qwen3-4b-*.json`
The suites	`*-math500-*`, `*-aime-*`, `*-harp-*`, `*-babilong-*.json`
Claude's spending	`v2/records/bench/claude-ledger.jsonl`

Appendix B: Decision Log Entries Cited

The project's decision log (`v2/DECISIONS.md`) records every technical decision with its reason and evidence. Table B.1 lists the entries this report cites.

Table B.1: Decision log entries cited in this report

Entry	Decision
E-02	One reader and one embedder for every contender, so differences between contenders are differences between memories
E-05	Three scripted twelve-week lives, generated from a persona and a seed
E-08	Growth measured as facts known out of those told; false memories counted apart
E-10	Deterministic answers: greedy decoding, thinking off
E-12	Every record carries the machine, the versions and a hash of the code
E-14	Honest SSD reads: room files read with the file cache bypassed
E-15	A room is written as one continuous page
E-16	One room on the desk, plus the closest moments as words
E-17	A new machine: the MacBook Pro M5 Pro, with the MacBook Air's results kept
E-18	Room size and how many moments to re-read, tuned on development lives
E-19	Step 1's pass marks, written before any held-out run
E-20	Step 1's results against its pass marks
E-21	What "used" means, and what watching attention costs
E-24	The first app: a local page with its security checks
E-25	The errands, measured
E-26	A model sixteen times bigger on the same Mac, reading the memory as words
E-27	A crash window in the room files, and its fix
E-29	The engine is the project: three layers, reach, local only, Claude only as a yardstick
E-30	The Long Haul, the study's own hard test
E-31	Asking never teaches
E-32	Everyone reads the same instructions
E-33	Ollama pairs through a proxy
E-34	The app's visual design, "Instrument"
E-35	One measuring job at a time
E-36	The Hugging Face suites run on Claude and Ollama, not yet on the engine
E-37	The 1.7B's wording, not its memory, sank its recall at 1M and 2M
E-38	Speed does not grow with memory
E-39	Past 2M: the same questions under one and two million more tokens
E-40	The engine's process held 19 GB; MLX's buffer cache capped at 1 GB
E-41	The cap, measured: a third of the RAM, almost twice the speed, the same answers
E-42	Project reach is the best reach
E-43	The Ollama suite runs redone where the runner, not the model, set the score
E-44	Files into memory: a vision model turns them into words once

E-47	An OpenAI-compatible endpoint with memory
E-48	One `camr` command and its installers
E-49	The landing page and the meaning of colour
E-50	Swarm removed: the app is Chat and Code
E-51	Shelves: memory kept apart by kind of work (Projects, Coding, Research, Personal), and read as one
E-52	Warm before the first question: kernels built, newest rooms read into RAM
E-55	The chat is an assistant, and the model decides when to reach into memory
E-56	Memory that revises itself, never by deleting
E-57	Eyes: a vision model that also reasons (Qwen3-VL-4B-Thinking)
E-58	Code: café websites, a benchmark for building from what was told
E-59	The Code agent finishes what it starts
E-60	Looks are worked out at once